



# LIK HUNG

METAL MANUFACTURING LTD. 力雄金屬製品有限公司

## 2021 CATALOGUE

Cable Trunking

Cable Tray

Cable Ladder


Cable Basket

電線槽

電纜托盤

電纜梯架

電線籃

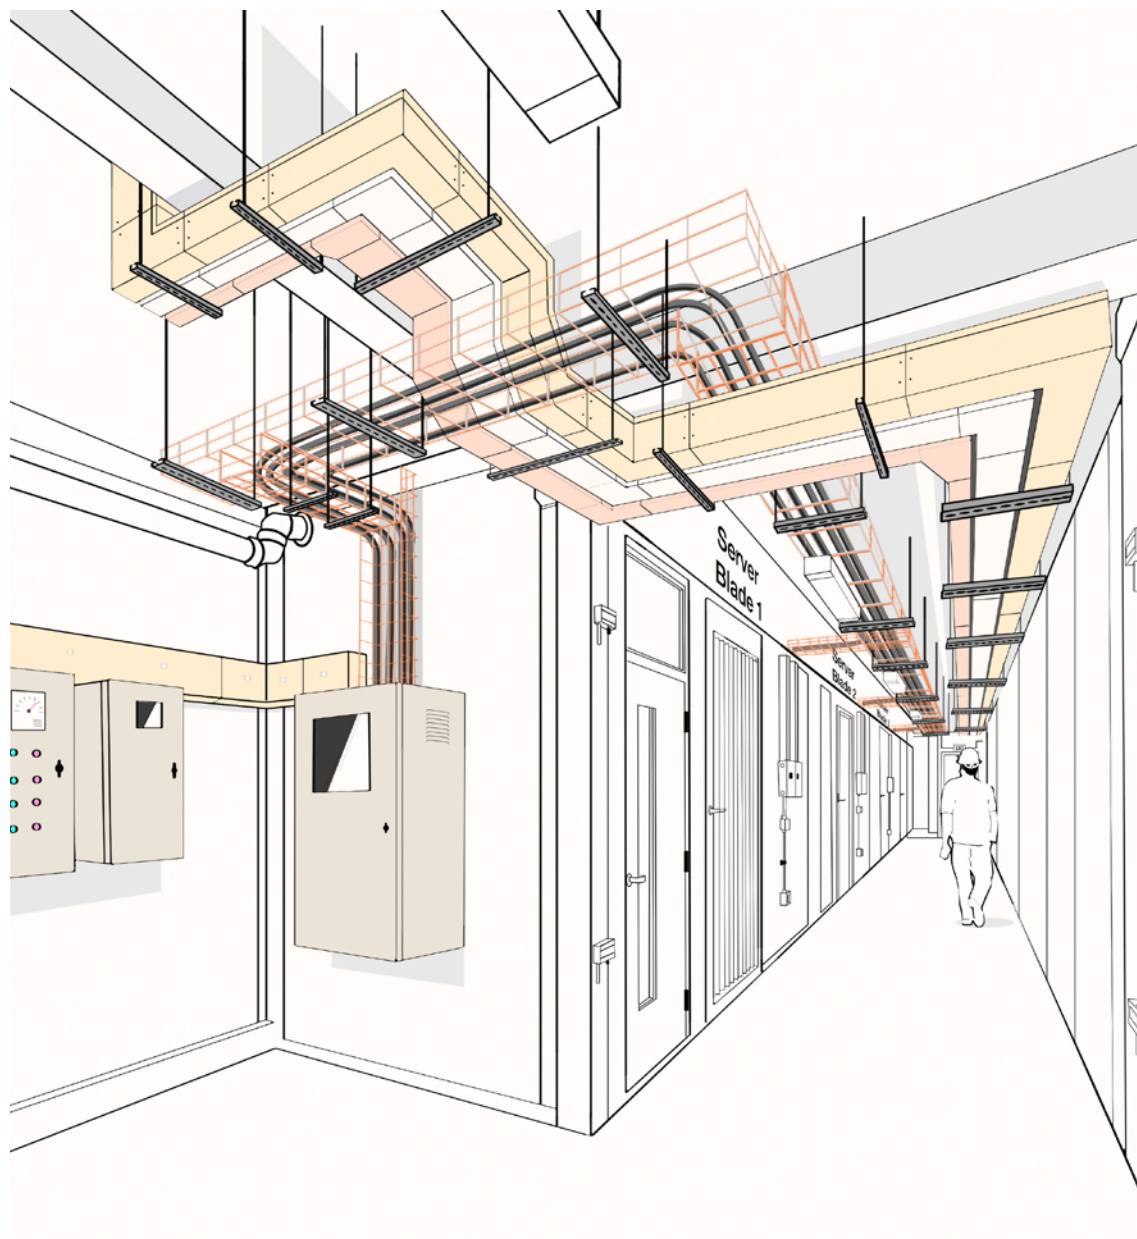

# contents 目錄

company milestones	公司里程碑	2
project selection	工程項目例子	3-4
product code guide	產品代號指南	5
cable trunking	電線槽	6-13
cable tray	電纜托盤	14-18
cable ladder	電纜梯架	19-22
cable basket	電線籃	23-26
waterproof trunking	防水線槽	27-29
skirting trunking	牆邊線槽	30-31
floor trunking –types	地槽-款式	32
raised floor trunking	地台線槽	33-38
underfloor trunking	藏地線槽	39-43
flushfloor trunking	平地線槽	44-46
common fitting types	常用槽曲款式	47
cable capacity	電線容量	48

**1960**

Company founders enter the industry

公司創辦人進軍五金行業

**1991**

LH is appointed one of the major suppliers to HK government agencies

力雄被列入政府指定供應商之一

**2001**

LH is awarded ISO 9001 for quality management system

力雄首獲ISO 9001質量管理標準

**2015**

Hong Kong warehouse moved to Kwai Chung, tripling Hong Kong storage area (~1200sqm)

香港倉搬遷到葵涌, 大大擴充庫存空間

**2018**

LH is awarded "Caring Company" status, for investment in people, environment, community.

力雄首獲"商界展關懷"公司殊榮

**1985**

"Lik Hung" brand of cable containment products launched

"力雄牌"線槽疏茜面世

**1992**

Dongguan factory site established (~6000 sqm)

生產移師東莞工廠

**2007**

Phase 2 expansion of Dongguan factory site (+~9000sqm)

東莞工廠擴建 9000sqm, 加大生產規模

**2017**

Phase 3 expansion of Dongguan factory site to increase assembly area (+~1100sqm)

工廠第3期擴展, 增加組裝空間

**2018/19**

LH is awarded their first patents and design award for new floor service box

力雄新款地台箱榮獲公司第一批專利和獎項

*Care. Commitment. Expertise  
for over half a century*

盡心，承諾，專業 超過半世紀







Kwai Chung Hospital Phase 2  
2021 -



Ocean Park Waterworld  
2018 - 19

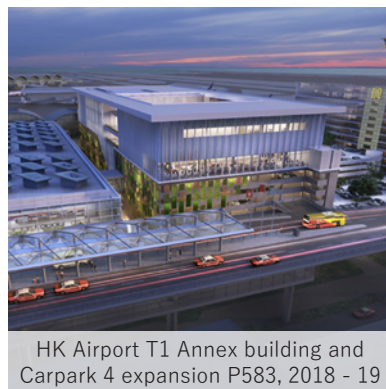

HK Airport T1 Annex building and  
Carpark 4 expansion P583, 2018 - 19

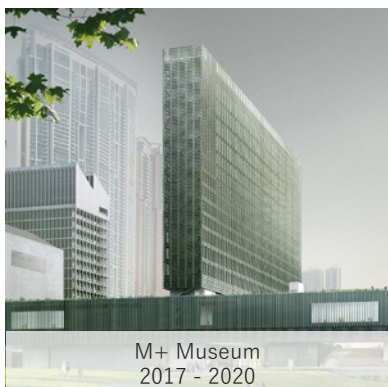


M+ Museum  
2017 - 2020

Hong Kong  
香港



Tuen Mun - Chek Lap Kok Link  
2016 - 18

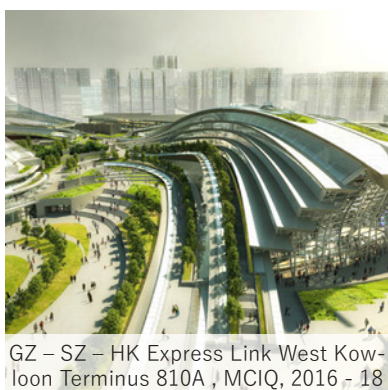


GZ - SZ - HK Express Link West Kow-  
loon Terminus 810A , MCIQ, 2016 - 18



New World Centre H2 K11 Musea  
2016 - 17



HK Disneyland  
2012 - 16

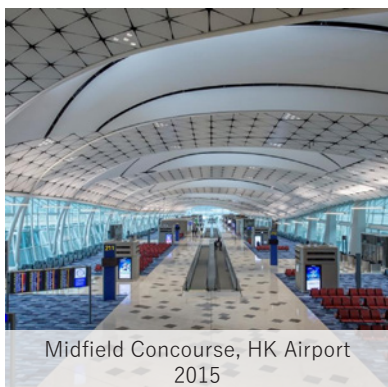

Midfield Concourse, HK Airport  
2015



T-Park, Tuen Mun Sludge Treatment  
2012 - 13



International Finance Centre, Interna-  
tional Commerce Centre, 2004, 2010





Studio City Phase 2  
2020 -



Islands Hospital Complex  
2020 -



Galaxy Hotel Phase 1,2,3c  
2013 - 19



Lisboa Palace  
2015 - 18

Macau  
澳門



Wynn Palace Phase 1-5  
2006 - 2015



Shangri La Ulaanbaatar  
2016

Mainland China  
中國大陸




Grand Hyatt Resort Sanya  
2013 - 14



Shangri La Nanjing  
2013 - 14



Shanghai IFC  
2010

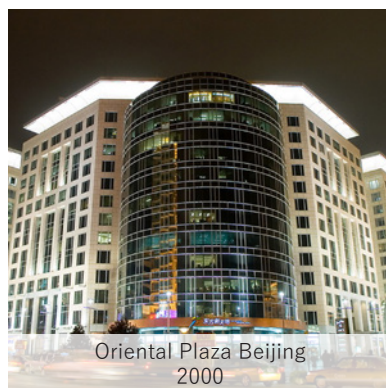

Oriental Plaza Beijing  
2000

Other references can be found on [www.likhung.hk](http://www.likhung.hk) 更多項目可到公司網站瀏覽

# Cable trunking, basket, tray, ladder product codes

## 線槽, 線籃, 托盤, 梯架 產品代號

	PRODUCT TYPE 產品類	DIMENSION 尺寸	FITTINGS 配件/ 曲編號	THICKNESS 厚度	OTHER 其他
e.g	<b>QT</b>	<b>4X3</b>	<b>.1</b>	<b>T12</b>	<b>H</b>
TRUNKING 線槽	<b>QT</b> Centre Caption 肚臍蓋	<b>4X3</b>  4" inches wide 闊  X  3" inches tall 高	<b>.1</b> 90°Bend Front opening 正曲	<b>T9</b> 0.9mm	<b>D</b> Double / Multi compartment 孖格 (Trunking only) (只限線槽)
	<b>CT</b> Clip Fix 彈夾蓋		<b>.2</b> 90°Bend Internal opening 內曲	<b>T10</b> 1.0mm	
	<b>ST</b> Screw Fix 螺絲蓋		<b>.3</b> Tee Bend 三叉曲	<b>T11</b> 1.12mm	
BASKET 線籃	<b>CAB</b> Cable basket 電線籃		<b>.4</b> 90°Bend External opening 外曲	<b>T12</b> 1.2mm  <b>T14</b> 1.4mm	<b>H</b> Hot Dip Galvanized 熱浸鋅  <b>P</b> Paint (Epoxy powder) (噴粉)
			<b>.5</b> 90°Cross Fitting 十字曲	<b>T15</b> 1.5mm	
TRAY 托盤	<b>SG</b> Single flange 單邊疏茜	<b>4</b> 4" inches wide 闊 X (Standard product height 標準高度)	<b>.6</b> Reducer fitting 刁士	<b>T16</b> 1.6mm	<b>S</b> 304 Stainless Steel 304 不銹鋼
	<b>RG</b> Return flange 勾邊疏茜		<b>.11 A / B / C</b> 135°Bend Front / Internal / External 135°正 / 內 / 外曲	<b>T18</b> 1.8mm  <b>T20</b> 2.0mm	
LADDER 梯架	<b>CL</b> Cable ladder 電纜梯架	<b>100</b> 100mm wide 闊 X (Standard product height 標準高度)			<b>X</b> 316 Stainless steel 316 不銹鋼

## Cable Trunking 電線槽

---

### STANDARDS

BS 4678 Part 1 Class 2 & 3 Corrosion Protection, BS1449, BSEN 50085-1,2-1, IEC 61084-1, 2-1, BSEN 10139, EN 10143, BSEN 10149

### 規格標準

BS 4678 Part 1 Class 2 & 3 抗蝕保護, BS1449, BSEN 50085-1,2-1, IEC 61084-1, 2-1, BSEN 10139, EN 10143, BSEN 10149

### TRUNKING COVER TYPE

Centre Capton (QT)  
Screw Fix (ST)  
Clip Fix (CT)

### 槽蓋款式

肚臍蓋(QT)  
螺絲蓋(ST)  
彈夾蓋(CT)

### MATERIAL

Galvanised Steel Sheet  
Mild Steel  
Stainless Steel Sheet SS304 (S), SS316 (X)

### 原料

鍍鋅鋼板  
鋼板  
不銹鋼板SS304 (S), SS316 (X)

### LENGTH

Standard length of 2.44m,  
Other lengths available on request

### 長度

標準2.44m,  
其他長度可按照客需要

### THICKNESS

Comply to BS 4678  
Other thicknesses can be made  
(0.9mm -2.0mm )

### 厚度

符合BS 4678要求  
其他厚度由0.9mm -2.0mm 可按要求生產

### FINISHES

Hot Dip Galvanized to BS729, ISO1460, 1461 (H)  
Coloured Epoxy Powder Coating / High Grade Outdoor Powder (P)

### 表面處理

熱浸鋅符合標準BS729, ISO1460, 1461 (H)  
顏色聚脂油粉 / 高級戶外粉 (P)

### SEPARATE COMPARTMENTS



2 compartment (D), or multi compartment (T)  
as requested

### 槽內間格


可按照客人的要求製成二倉式(D), 多倉式(T)

Fittings and accessories meet the same standard and specifications as trunkings  
線槽配件的規格及標準完全遵照及配合電線槽而製成


Cable trunking 電線槽

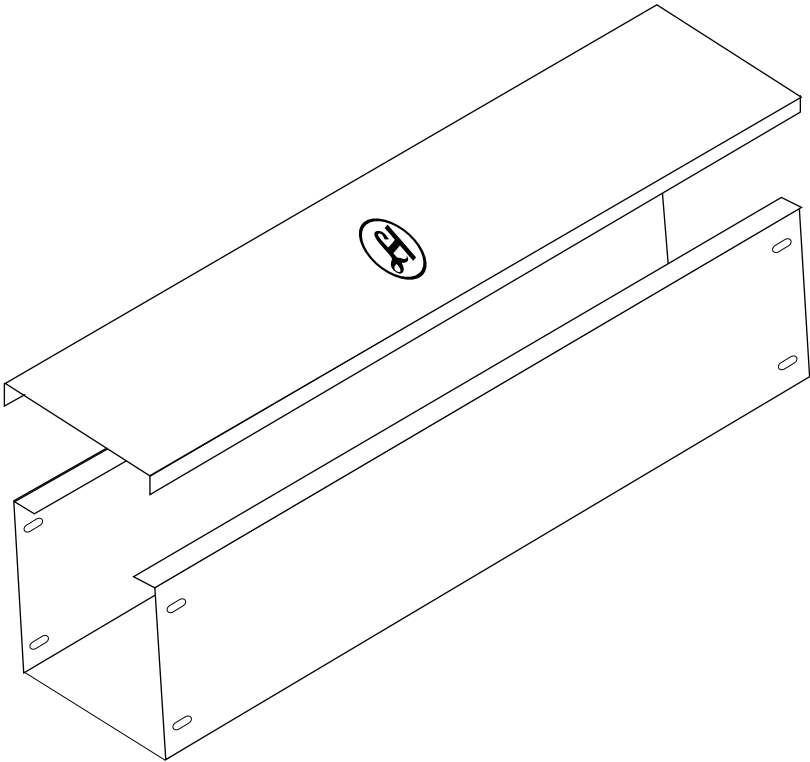


Centre Caption 肚臍蓋型



Screw Fix 螺絲蓋型



Clip Fix 彈夾蓋型



Multi-Compartment 分格式


Cable trunking size 電線槽尺寸 (mm)	Dimension 尺寸 (mm)		Model Number 型號		
	A	B	Centre Caption (QT) 肚臍蓋型	Screw Fix (ST) 螺絲蓋型	Clip Fix (CT) 彈夾蓋型
50 x 50	50	50	QT2X2T10	ST2X2T10	CT2X2T10
75 x 50	75	50	QT3X2T12	ST3X2T12	CT3X2T12
75 x 75	75	75	QT3X3T12	ST3X3T12	CT3X3T12
100 x 75	100	75	QT4X3T12	ST4X3T12	CT4X3T12
100 x 100	100	100	QT4X4T14	ST4X4T14	CT4X4T14
150 x 100	150	100	QT6X4T14	ST6X4T14	CT6X4T14
150 x 150	150	150	QT6X6T16	ST6X6T16	CT6X6T16
200 x 150	200	150	QT8X6T16	ST8X6T16	CT8X6T16
200 x 200	200	200	QT8X8T16	ST8X8T16	CT8X8T16

Other sizes can be custom made  
其他尺寸可按客戶要求生產




## Cable trunking - Fittings and accessories 電線槽曲及配件


### 90° Mitre bend 90° 斜角槽曲



Front opening 正面蓋型




Internal opening 內開蓋型




External opening 外開蓋型

Suitable for trunking size 適用線槽尺寸 (mm)	Dimension 尺寸 (mm)					Model: Centre Caption 肚臍蓋型 (QT), Screw Fix 螺絲蓋型 (ST), Clip fix 彈夾蓋型 (CT)		
	A	B	C	D	E	Front opening 正面蓋型	Internal Opening 內開蓋型	External opening 外開蓋型
50 x 50	125	125	106	125	125	QT/ST/CT 2X2.1T10	QT/ST/CT 2X2.2T10	QT/ST/CT 2X2.4BT10
75 x 50	150	150	106	125	125	QT/ST/CT 3X2.1T12	QT/ST/CT 3X2.2T12	QT/ST/CT 3X2.4BT12
75 x 75	150	150	106	150	150	QT/ST/CT 3X3.1T12	QT/ST/CT 3X3.2T12	QT/ST/CT 3X3.4BT12
100 x 75	175	175	106	150	150	QT/ST/CT 4X3.1T12	QT/ST/CT 4X3.2T12	QT/ST/CT 4X3.4BT12
100 x 100	175	175	106	175	175	QT/ST/CT 4X4.1T14	QT/ST/CT 4X4.2T14	QT/ST/CT 4X4.4BT14
150 x 100	225	225	106	175	175	QT/ST/CT 6X4.1T14	QT/ST/CT 6X4.2T14	QT/ST/CT 6X4.4BT14
150 x 150	225	225	106	225	225	QT/ST/CT 6X6.1T16	QT/ST/CT 6X6.2T16	QT/ST/CT 6X6.4BT16
200 x 150	275	275	106	225	225	QT/ST/CT 8X6.1T16	QT/ST/CT 8X6.2T16	QT/ST/CT 8X6.4BT16
200 x 200	275	275	106	275	275	QT/ST/CT 8X8.1T16	QT/ST/CT 8X8.2T16	QT/ST/CT 8X8.4BT16


### 90° Sharp bend 90° 死角槽曲



Front opening 正面蓋型



Internal opening 內開蓋型




External opening 外開蓋型


Suitable for trunking size 適用線槽尺寸 (mm)	Dimension 尺寸 (mm)					Model: Centre Caption 肚臍蓋型 (QT), Screw Fix 螺絲蓋型 (ST), Clip fix 彈夾蓋型 (CT)		
	A	B	C	D	E	Front opening 正面蓋型	Internal Opening 內開蓋型	External opening 外開蓋型
50 x 50	125	125	75	125	125	QT/ST/CT 2X2.1AT10	QT/ST/CT 2X2.2AT10	QT/ST/CT 2X2.4AT10
75 x 50	150	150	75	125	125	QT/ST/CT 3X2.1AT12	QT/ST/CT 3X2.2AT12	QT/ST/CT 3X2.4AT12
75 x 75	150	150	75	150	150	QT/ST/CT 3X3.1AT12	QT/ST/CT 3X3.2AT12	QT/ST/CT 3X3.4AT12
100 x 75	175	175	75	150	150	QT/ST/CT 4X3.1AT12	QT/ST/CT 4X3.2AT12	QT/ST/CT 4X3.4AT12
100 x 100	175	175	75	175	175	QT/ST/CT 4X4.1AT14	QT/ST/CT 4X4.2AT14	QT/ST/CT 4X4.4AT14
150 x 100	225	225	75	175	175	QT/ST/CT 6X4.1AT14	QT/ST/CT 6X4.2AT14	QT/ST/CT 6X4.4AT14
150 x 150	225	225	75	225	225	QT/ST/CT 6X6.1AT16	QT/ST/CT 6X6.2AT16	QT/ST/CT 6X6.4AT16
200 x 150	275	275	75	225	225	QT/ST/CT 8X6.1AT16	QT/ST/CT 8X6.2AT16	QT/ST/CT 8X6.4AT16
200 x 200	275	275	75	275	275	QT/ST/CT 8X8.1AT16	QT/ST/CT 8X8.2AT16	QT/ST/CT 8X8.4AT16

## Cable trunking - Fittings and accessories 電線槽曲及配件


### Mitre tee 斜角三叉




Front opening  
正面蓋型



Top opening-Type 1  
頂開蓋型-款式1




Top opening-Type 2  
頂開蓋型-款式2




Internal opening  
內開蓋型

Suitable for trunking size 適用線槽尺寸 (mm)	Dimension 尺寸 (mm)					Model: Centre Caption 肚臍蓋型 (QT), Screw Fix 螺絲蓋型 (ST), Clip fix 彈夾蓋型 (CT)			
	A	B	C	D	E	Front opening 正面蓋型	Top opening - Type 1 頂開蓋型-款式1	Top opening - Type 2 頂開蓋型-款式2	Internal Opening 內開蓋型
50 x 50	100	150	70	100	150	QT/ST/CT 2X2.3T10	QT/ST/CT 2X2.13B1T10	QT/ST/CT 2X2.13B2T10	QT/ST/CT 2X2.13CDT10
75 x 50	125	175	70	100	150	QT/ST/CT 3X2.3T12	QT/ST/CT 3X2.13B1T12	QT/ST/CT 3X2.13B2T12	QT/ST/CT 3X2.13CDT12
75 x 75	125	175	70	125	175	QT/ST/CT 3X3.3T12	QT/ST/CT 3X3.13B1T12	QT/ST/CT 3X3.13B2T12	QT/ST/CT 3X3.13CDT12
100 x 75	150	200	70	125	175	QT/ST/CT 4X3.3T12	QT/ST/CT 4X3.13B1T12	QT/ST/CT 4X3.13B2T12	QT/ST/CT 4X3.13CDT12
100 x 100	150	200	70	150	200	QT/ST/CT 4X4.3T14	QT/ST/CT 4X4.13B1T14	QT/ST/CT 4X4.13B2T14	QT/ST/CT 4X4.13CDT14
150 x 100	225	300	106	175	250	QT/ST/CT 6X4.3T14	QT/ST/CT 6X4.13B1T14	QT/ST/CT 6X4.13B2T14	QT/ST/CT 6X4.13CDT14
150 x 150	225	300	106	225	300	QT/ST/CT 6X6.3T16	QT/ST/CT 6X6.13B1T16	QT/ST/CT 6X6.13B2T16	QT/ST/CT 6X6.13CDT16
200 x 150	275	350	106	225	300	QT/ST/CT 8X6.3T16	QT/ST/CT 8X6.13B1T16	QT/ST/CT 8X6.13B2T16	QT/ST/CT 8X6.13CDT16
200 x 200	275	350	106	275	350	QT/ST/CT 8X8.3T16	QT/ST/CT 8X8.13B1T16	QT/ST/CT 8X8.13B2T16	QT/ST/CT 8X8.13CDT16


### Sharp tee 死角三叉




Front opening  
正面蓋型



Top opening-Type 1  
頂開蓋型-款式1



Top opening-Type 2  
頂開蓋型-款式2




Internal opening  
內開蓋型


Suitable for trunking size 適用線槽尺寸 (mm)	Dimension 尺寸 (mm)					Model: Centre Caption 肚臍蓋型 (QT), Screw Fix 螺絲蓋型 (ST), Clip fix 彈夾蓋型 (CT)			
	A	B	C	D	E	Front opening 正面蓋型	Top opening - Type 1 頂開蓋型-款式1	Top opening - Type 2 頂開蓋型-款式2	Internal Opening 內開蓋型
50 x 50	100	150	50	100	150	QT/ST/CT 2X2.3AT10	QT/ST/CT 2X2.13AB1T10	QT/ST/CT 2X2.13AB2T10	QT/ST/CT 2X2.13ACDT10
75 x 50	125	175	50	100	150	QT/ST/CT 3X2.3AT12	QT/ST/CT 3X2.13AB1T12	QT/ST/CT 3X2.13AB2T12	QT/ST/CT 3X2.13ACDT12
75 x 75	125	175	50	125	175	QT/ST/CT 3X3.3AT12	QT/ST/CT 3X3.13AB1T12	QT/ST/CT 3X3.13AB2T12	QT/ST/CT 3X3.13ACDT12
100 x 75	150	200	50	125	175	QT/ST/CT 4X3.3AT12	QT/ST/CT 4X3.13AB1T12	QT/ST/CT 4X3.13AB2T12	QT/ST/CT 4X3.13ACDT12
100 x 100	150	200	50	150	200	QT/ST/CT 4X4.3AT14	QT/ST/CT 4X4.13AB1T14	QT/ST/CT 4X4.13AB2T14	QT/ST/CT 4X4.13ACDT14
150 x 100	225	300	75	175	250	QT/ST/CT 6X4.3AT14	QT/ST/CT 6X4.13AB1T14	QT/ST/CT 6X4.13AB2T14	QT/ST/CT 6X4.13ACDT14
150 x 150	225	300	75	225	300	QT/ST/CT 6X6.3AT16	QT/ST/CT 6X6.13AB1T16	QT/ST/CT 6X6.13AB2T16	QT/ST/CT 6X6.13ACDT16
200 x 150	275	350	75	225	300	QT/ST/CT 8X6.3AT16	QT/ST/CT 8X6.13AB1T16	QT/ST/CT 8X6.13AB2T16	QT/ST/CT 8X6.13ACDT16
200 x 200	275	350	75	275	350	QT/ST/CT 8X8.3AT16	QT/ST/CT 8X8.13AB1T16	QT/ST/CT 8X8.13AB2T16	QT/ST/CT 8X8.13ACDT16

## Cable trunking - Fittings and accessories 電線槽曲及配件


### 135° Bend 135° 斜角槽曲



Front opening 正面蓋型




Internal opening 內開蓋型




External opening 外開蓋型

Suitable for trunking size 適用線槽尺寸 (mm)	Dimension 尺寸 (mm)				Model: Centre Caption 肚臍蓋型 (QT), Screw Fix 螺絲蓋型 (ST), Clip fix 彈夾蓋型 (CT)		
	A	B	C	D	Front opening 正面蓋型	Internal Opening 內開蓋型	External opening 外開蓋型
50 x 50	95	75	95	95	QT/ST/CT 2X2.11AT10	QT/ST/CT 2X2.11BT10	QT/ST/CT 2X2.11CT10
75 x 50	105	75	105	95	QT/ST/CT 3X2.11AT12	QT/ST/CT 3X2.11BT12	QT/ST/CT 3X2.11CT12
75 x 75	105	75	105	105	QT/ST/CT 3X3.11AT12	QT/ST/CT 3X3.11BT12	QT/ST/CT 3X3.11CT12
100 x 75	116	75	116	105	QT/ST/CT 4X3.11AT12	QT/ST/CT 4X3.11BT12	QT/ST/CT 4X3.11CT12
100 x 100	116	75	116	116	QT/ST/CT 4X4.11AT14	QT/ST/CT 4X4.11BT14	QT/ST/CT 4X4.11CT14
150 x 100	137	75	137	116	QT/ST/CT 6X4.11AT14	QT/ST/CT 6X4.11BT14	QT/ST/CT 6X4.11CT14
150 x 150	137	75	137	137	QT/ST/CT 6X6.11AT16	QT/ST/CT 6X6.11BT16	QT/ST/CT 6X6.11CT16
200 x 150	157	75	157	137	QT/ST/CT 8X6.11AT16	QT/ST/CT 8X6.11BT16	QT/ST/CT 8X6.11CT16
200 x 200	157	75	157	157	QT/ST/CT 8X8.11AT16	QT/ST/CT 8X8.11BT16	QT/ST/CT 8X8.11CT16

### 90° Mitre Cross 90° 十字槽曲



Front opening 正面蓋型




Internal opening 內開蓋型


Suitable for trunking size 適用線槽尺寸 (mm)	Dimension 尺寸 (mm)					Model: Centre Caption 肚臍蓋型 (QT), Screw Fix 螺絲蓋型 (ST), Clip fix 彈夾蓋型 (CT)	
	A	B	C	D	E	Flat Bend 正曲型	Internal Bend 內曲型
50 x 50	150	150	70	150	150	QT/ST/CT 2X2.5T10	QT/ST/CT 2X2.5CDT10
75 x 50	175	175	70	150	150	QT/ST/CT 3X2.5T12	QT/ST/CT 3X2.5CDT12
75 x 75	175	175	70	175	175	QT/ST/CT 3X3.5T12	QT/ST/CT 3X3.5CDT12
100 x 75	200	200	70	175	175	QT/ST/CT 4X3.5T12	QT/ST/CT 4X3.5CDT12
100 x 100	200	200	70	200	200	QT/ST/CT 4X4.5T14	QT/ST/CT 4X4.5CDT14
150 x 100	300	300	106	250	250	QT/ST/CT 6X4.5T14	QT/ST/CT 6X4.5CDT14
150 x 150	300	300	106	300	300	QT/ST/CT 6X6.5T16	QT/ST/CT 6X6.5CDT16
200 x 150	350	350	106	300	300	QT/ST/CT 8X6.5T16	QT/ST/CT 8X6.5CDT16
200 x 200	350	350	106	350	350	QT/ST/CT 8X8.5T16	QT/ST/CT 8X8.5CDT16

## Cable trunking - Fittings and accessories 電線槽曲及配件


### Flared connector 槽蓋刁士



Top opening 喇叭咀




Top opening 90° 槽蓋刁士




Side opening 扭向槽口短蓋

Suitable for trunking size 適用線槽尺寸 (mm)	Dimension 尺寸 (mm)					Model: Centre Caption 肚臍蓋型 (QT), Screw Fix 螺絲蓋型 (ST), Clip fix 彈夾蓋型 (CT)		
	A	C	X	Y	Z	Top Opening 喇叭咀	Top Opening (90°) 槽蓋刁士	Side Opening 扭向槽口短蓋
50 x 50	50	50	50	50	50	QT/ST/CT 2X2.15AT10	QT/ST/CT 2X2.15BT10	QT/ST/CT 2X2.17T10
75 x 50	75	50	75	50	50	QT/ST/CT 3X2.15AT12	QT/ST/CT 3X2.15BT12	QT/ST/CT 3X2.17T12
75 x 75	75	50	75	75	50	QT/ST/CT 3X3.15AT12	QT/ST/CT 3X3.15BT12	QT/ST/CT 3X3.17T12
100 x 75	100	50	100	75	50	QT/ST/CT 4X3.15AT12	QT/ST/CT 4X3.15BT12	QT/ST/CT 4X3.17T12
100 x 100	100	50	100	100	50	QT/ST/CT 4X4.15AT14	QT/ST/CT 4X4.15BT14	QT/ST/CT 4X4.17T14
150 x 100	150	50	150	100	50	QT/ST/CT 6X4.15AT14	QT/ST/CT 6X4.15BT14	QT/ST/CT 6X4.17T14
150 x 150	150	50	150	150	50	QT/ST/CT 6X6.15AT16	QT/ST/CT 6X6.15BT16	QT/ST/CT 6X6.17T16
200 x 150	200	50	200	150	50	QT/ST/CT 8X6.15AT16	QT/ST/CT 8X6.15BT16	QT/ST/CT 8X6.17T16
200 x 200	200	50	200	200	50	QT/ST/CT 8X8.15AT16	QT/ST/CT 8X8.15BT16	QT/ST/CT 8X8.17T16


### Reducer 刁士



Left 左刁士



Equal 正刁士




Right 右刁士

Suitable for trunking size 適用線槽尺寸 (mm)	Dimension 尺寸 (mm)					Model: Centre Caption 肚臍蓋型 (QT), Screw Fix 螺絲蓋型 (ST), Clip fix 彈夾蓋型 (CT)
	A	B	C	D	E	
75x75-50x50	150	50	75	75	50	QT/ST/CT3X3.6T12
100x50-50x50	150	50	100	50	50	QT/ST/CT4X2.6T12
100x100-75x75	150	75	100	100	75	QT/ST/CT4X4.6T14
150x100-100x100	200	100	150	100	100	QT/ST/CT6X4.6T14
150x150-100x100	200	100	150	150	100	QT/ST/CT6X6.6T16
200x200 - 150x150	200	150	200	200	150	QT/ST/CT8X8.6T16




## Cable trunking - Fittings and accessories 電線槽曲及配件

End cap 槽尾凸




Suitable for trunking size 適用線槽尺寸 (mm)	Dimension 尺寸 (mm)			Model Number 型號
	A	B	C	
50 x 50	48	48	25	<b>ECS2X2</b>
75 x 50	48	73	25	<b>ECS3X2</b>
75 x 75	73	73	25	<b>ECS3X3</b>
100 x 75	73	98	25	<b>ECS4X3</b>
100 x 100	98	98	25	<b>ECS4X4</b>
150 x 100	98	148	25	<b>ECS6X4</b>
150 x 150	148	148	25	<b>ECS6X6</b>
200 x 150	148	198	25	<b>ECS8X6</b>
200 x 200	198	198	25	<b>ECS8X8</b>

Cable support 電線掛片




Suitable for trunking size 適用線槽尺寸 (mm)	Dimension 尺寸 (mm)			Model Number 型號
	A	B	C	
50 x 50	250	45	45	<b>CSF2X2</b>
75 x 50	250	70	45	<b>CSF3X2</b>
75 x 75	250	70	70	<b>CSF3X3</b>
100 x 75	250	95	70	<b>CSF4X3</b>
100 x 100	250	95	95	<b>CSF4X4</b>
150 x 100	250	145	95	<b>CSF6X4</b>
150 x 150	250	145	145	<b>CSF6X6</b>
200 x 150	250	195	145	<b>CSF8X6</b>
200 x 200	250	195	195	<b>CSF8X8</b>

Trunking connector 槽駁片



Couple connector 對裝槽駁片




U-shaped connector U 型槽駁片

Suitable for trunking size 適用線槽尺寸 (mm)	Dimension 尺寸 (mm)				Model Number 型號	
	A	B	C	D	Couple Connector 對裝槽駁片	U-shaped Connector U 型槽駁片
50 x 50	45	70	-	48	<b>CPF2</b>	<b>CPUF2X2</b>
75 x 50	45	70	-	73	<b>CPF2</b>	<b>CPUF3X2</b>
75 x 75	70	70	35	73	<b>CPF3</b>	<b>CPUF3X3</b>
100 x 75	70	70	35	98	<b>CPF3</b>	<b>CPUF4X3</b>
100 x 100	95	70	60	98	<b>CPF4</b>	<b>CPUF4X4</b>
150 x 100	95	70	60	148	<b>CPF4</b>	<b>CPUF6X4</b>
150 x 150	145	70	111	148	<b>CPF6</b>	<b>CPUF6X6</b>
200 x 150	145	70	111	198	<b>CPF6</b>	<b>CPUF8X6</b>
200 x 200	195	70	160	198	<b>CPF8</b>	<b>CPUF8X8</b>


## Cable trunking - Fittings and accessories 電線槽曲及配件

### Flange 槽吊咀



Suitable for trunking size 適用線槽尺寸 (mm)	Dimension 尺寸 (mm)			Model Number 型號
	A	B	C	
50 x 50	48	48	25	<b>FF2X2</b>
75 x 50	48	73	25	<b>FF3X2</b>
75 x 75	73	73	25	<b>FF3X3</b>
100 x 75	73	98	25	<b>FF4X3</b>
100 x 100	98	98	25	<b>FF4X4</b>
150 x 100	98	148	25	<b>FF6X4</b>
150 x 150	148	148	25	<b>FF6X6</b>
200 x 150	148	198	25	<b>FF8X6</b>
200 x 200	198	198	25	<b>FF8X8</b>

### Copper earth links 銅水線片

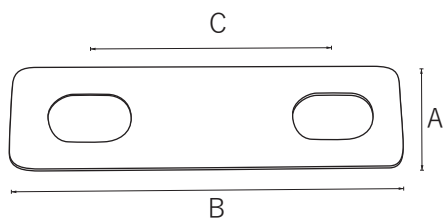

For project type 用於工程種類	Dimension 尺寸 (mm)				Model Number 型號
	Thickness 厚度 mm	A	B	C	
Business Project 一般商用電線槽	0.6	14	48	35	<b>EL75</b>
Architectural Services Department project 建築署用電線槽	1	14	57	35	<b>EL100</b>
Housing Authority Project 房屋署用電線槽	2	12	57	35	<b>EL120</b>
MTRC 地鐵	3	25	58	35	<b>EL150</b>

## Cable Tray 電纜托盤

---

### STANDARDS

BS1449, BSEN 10139,  
BSEN 10149, IEC61537

### 規格標準

BS1449, BSEN 10139,  
BSEN 10149, IEC61537

### FLANGE TYPE

Single Flange (SG)  
Return Flange (RG)

### 摺邊款式

單摺邊 (SG)  
雙/勾摺邊 (RG)

### FLANGE HEIGHT

Complies with HK government project specifications  
Other heights can be produced as needed

### 邊高

符合香港政府有關部門要求  
其他高度可按要求製成

### TRAY END STYLE

With / Without built-in  
connector

### 茜身款

茜身連駁款  
普通平邊款

### MATERIAL

Galvanised Steel Sheet  
Mild Steel  
Stainless Steel Sheet SS304 (S) /  
SS316 (X)

### 原料

鍍鋅鋼板  
鋼板  
不銹鋼板SS304 (S),  
SS316 (X)

### LENGTH

Standard length of 2.44m,  
other lengths available on request

### 長度

標準2.44m,  
其他長度可按照客需要

### THICKNESS

Complies with HK government project specifications  
Other thicknesses can be produced as needed

### 厚度

符合香港政府有關部門要求  
其他厚度可按要求製成

### FINISHES

Hot Dip Galvanised to BS729, ISO 1460, 1461 (H)  
Coloured Epoxy Powder Coating / High Grade Outdoor Powder (P)


### 表面處理

熱浸鋅符合標準BS729, ISO1460, 1461 (H)  
顏色聚脂油粉 / 高級戶外粉 (P)

Fittings and accessories meet the same standard and specifications as the trays  
配件的規格及標準完全遵照及配合電纜托盤而製成

## Cable tray 電纜托盤

### Single Flange Type 單摺邊式

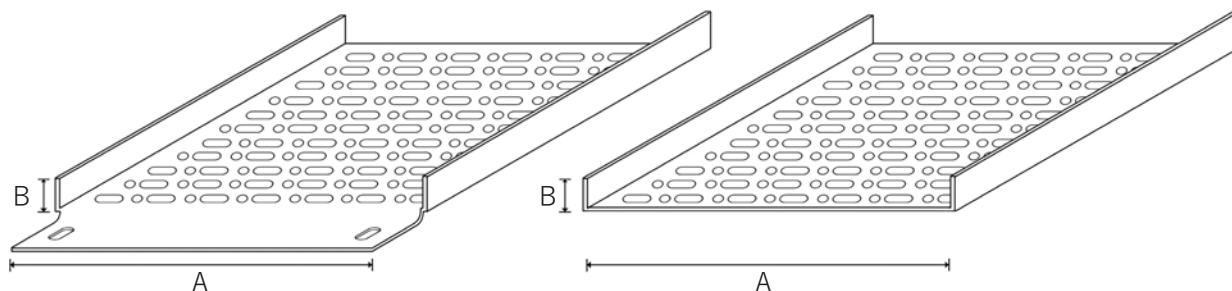


With built-in connector 茜身連駁款

Without built-in connector 普通平邊款

Cable Tray size 電纜托盤 (mm)	Dimension 尺寸 (mm)		Model number 型號			
	A	B	Galvanised Steel 鍍鋅鋼	Hot-dipped Galvanised 熱浸鋅	Stainless Steel SS304 不銹鋼 SS304	Stainless Steel 316 不銹鋼 SS316
50	50	13	SG2T12	SG2T12H	SG2T12S	SG2T12X
75	75	13	SG3T12	SG3T12H	SG3T12S	SG3T12X
100	100	13	SG4T12	SG4T12H	SG4T12S	SG4T12X
150	150	13	SG6T12	SG6T12H	SG6T12S	SG6T12X
200	200	13	SG8T15	SG8T16H	SG8T15S	SG8T15X
300	300	20	SG12T15	SG12T16H	SG12T15S	SG12T15X
400	400	20	SG16T15	SG16T16H	SG16T15S	SG16T15X
500	500	20	SG20T20	SG20T20H	SG20T15S	SG20T15X
600	600	20	SG24T20	SG24T20H	SG24T15S	SG24T15X
700	700	20	SG28T20	SG28T20H	SG28T15S	SG28T15X
800	800	20	SG32T20	SG32T20H	SG32T15S	SG32T15X
900	900	20	SG36T20	SG36T20H	SG36T15S	SG36T15X

### Return Flange Type 勾摺邊式

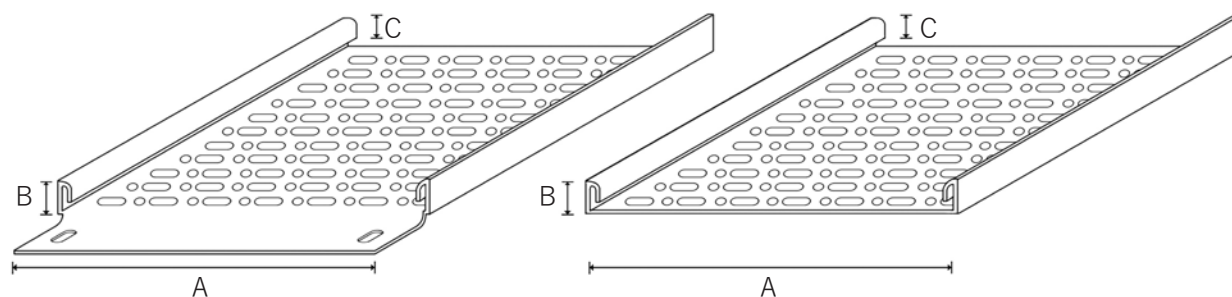

With built-in connector 茜身連駁款

Without built-in connector 普通平邊款


Cable Tray size 電纜托盤 (mm)	Dimension 尺寸 (mm)			Model number 型號			
	A	B	C	Galvanised Steel 鍍鋅鋼	Hot-dipped Galvanised 熱浸鋅	Stainless Steel SS304 不銹鋼 SS304	Stainless Steel 316 不銹鋼 SS316
50	50	20	13	RG2T12	RG2T12H	RG2T12S	RG2T12X
75	75	20	13	RG3T12	RG3T12H	RG3T12S	RG3T12X
100	100	20	13	RG4T12	RG4T12H	RG4T12S	RG4T12X
150	150	20	13	RG6T12	RG6T12H	RG6T12S	RG6T12X
200	200	20	13	RG8T15	RG8T16H	RG8T15S	RG8T15X
300	300	20	13	RG12T15	RG12T16H	RG12T15S	RG12T15X
400	400	20	13	RG16T15	RG16T16H	RG16T15S	RG16T15X
500	500	20	13	RG20T20	RG20T20H	RG20T15S	RG20T15X
600	600	20	13	RG24T20	RG24T20H	RG24T15S	RG24T15X
700	700	20	13	RG28T20	RG28T20H	RG28T15S	RG28T15X
800	800	20	13	RG32T20	RG32T20H	RG32T15S	RG32T15X
900	900	20	13	RG36T20	RG36T20H	RG36T15S	RG36T15X

Other sizes can be custom made 其他尺寸可按客戶要求生產




## Cable tray - Fittings and accessories 托盤曲及配件


### 90° Mitre bend 90° 斜角茜曲



Flat Bend 正曲型




Internal Bend 內曲型




External Bend 外曲型

Suitable for tray size 適用電纜托盤尺寸 (mm)	Dimension 尺寸 (mm)					Model: Single Flange 單摺邊式 (SG), Return Flange 勾摺邊式 (RG)		
	A	B	C	D	E	Flat Bend 正曲型	Internal Bend 內曲型	External Bend 外曲型
50	50	125	106	150	106	SG/RG2.1T12H	SG/RG2.2T12H	SG/RG2.4BT12H
75	75	150	106	150	106	SG/RG3.1T12H	SG/RG3.2T12H	SG/RG3.4BT12H
100	100	175	106	150	106	SG/RG4.1T12H	SG/RG4.2T12H	SG/RG4.4BT12H
150	150	225	106	150	106	SG/RG6.1T12H	SG/RG6.2T12H	SG/RG6.4BT12H
200	200	300	141	175	106	SG/RG8.1T16H	SG/RG8.2T16H	SG/RG8.4BT16H
300	300	400	141	225	106	SG/RG12.1T16H	SG/RG12.2T16H	SG/RG12.4BT16H
400	400	525	177	275	106	SG/RG16.1T16H	SG/RG16.2T16H	SG/RG16.4BT16H
500	500	625	177	275	106	SG/RG20.1T20H	SG/RG20.2T20H	SG/RG20.4BT20H
600	600	750	212	325	106	SG/RG24.1T20H	SG/RG24.2T20H	SG/RG24.4BT20H
700	700	850	212	325	106	SG/RG28.1T20H	SG/RG28.2T20H	SG/RG28.4BT20H
800	800	950	212	325	106	SG/RG32.1T20H	SG/RG32.2T20H	SG/RG32.4BT20H
900	900	1050	212	325	106	SG/RG36.1T20H	SG/RG36.2T20H	SG/RG36.4BT20H


### 135° Mitre bend 135° 斜角茜曲



Flat Bend 正曲型



Internal Bend 內曲型




External Bend 外曲型

Suitable for tray size 適用電纜托盤尺寸 (mm)	Dimension 尺寸 (mm)				Model: Single Flange 單摺邊式 (SG), Return Flange 勾摺邊式 (RG)		
	A	B	C	D	Flat Bend 正曲型	Internal Bend 內曲型	External Bend 外曲型
50	50	95	75	75	SG/RG2.11AT12H	SG/RG2.11BT12H	SG/RG2.11CT12H
75	75	106	75	75	SG/RG3.11AT12H	SG/RG3.11BT12H	SG/RG3.11CT12H
100	100	116	75	75	SG/RG4.11AT12H	SG/RG4.11BT12H	SG/RG4.11CT12H
150	150	137	75	75	SG/RG6.11AT12H	SG/RG6.11BT12H	SG/RG6.11CT12H
200	200	158	75	75	SG/RG8.11AT16H	SG/RG8.11BT16H	SG/RG8.11CT16H
300	300	224	100	100	SG/RG12.11AT16H	SG/RG12.11BT16H	SG/RG12.11CT16H
400	400	366	200	200	SG/RG16.11AT16H	SG/RG16.11BT16H	SG/RG16.11CT16H
500	500	407	200	200	SG/RG20.11AT20H	SG/RG20.11BT20H	SG/RG20.11CT20H
600	600	548	300	300	SG/RG24.11AT20H	SG/RG24.11BT20H	SG/RG24.11CT20H
700	700	590	300	300	SG/RG28.11AT20H	SG/RG28.11BT20H	SG/RG28.11CT20H
800	800	631	300	300	SG/RG32.11AT20H	SG/RG32.11BT20H	SG/RG32.11CT20H
900	900	673	300	300	SG/RG36.11AT20H	SG/RG36.11BT20H	SG/RG36.11CT20H


## Cable tray - Fittings and accessories 托盤曲及配件

### Mitre tee 斜角三叉

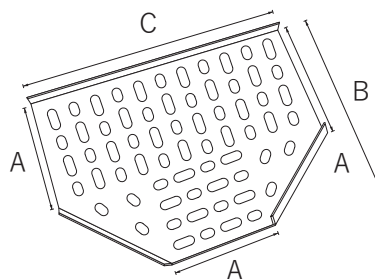

Suitable for tray size 適用電纜托盤尺寸 (mm)	Dimension 尺寸 (mm)			Model: Single Flange 單摺邊式 (SG), Return Flange 勾摺邊式 (RG)
	A	B	C	
50	50	125	200	<b>SG/RG2.3T12H</b>
75	75	150	225	<b>SG/RG3.3T12H</b>
100	100	175	250	<b>SG/RG4.3T12H</b>
150	150	225	300	<b>SG/RG6.3T12H</b>
200	200	300	400	<b>SG/RG8.3T16H</b>
300	300	400	500	<b>SG/RG12.3T16H</b>
400	400	525	650	<b>SG/RG16.3T16H</b>
500	500	625	750	<b>SG/RG20.3T20H</b>
600	600	750	900	<b>SG/RG24.3T20H</b>
700	700	850	1000	<b>SG/RG28.3T20H</b>
800	800	950	1100	<b>SG/RG32.3T20H</b>
900	900	1050	1200	<b>SG/RG36.3T20H</b>




### Mitre Cross 十字曲

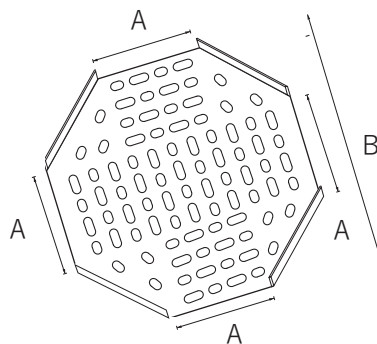

Suitable for tray size 適用電纜托盤尺寸 (mm)	Dimension 尺寸 (mm)		Model: Single Flange 單摺邊式 (SG), Return Flange 勾摺邊式 (RG)
	A	B	
50	50	200	<b>SG/RG2.5T12H</b>
75	75	225	<b>SG/RG3.5T12H</b>
100	100	250	<b>SG/RG4.5T12H</b>
150	150	300	<b>SG/RG6.5T12H</b>
200	200	400	<b>SG/RG8.5T16H</b>
300	300	500	<b>SG/RG12.5T16H</b>
400	400	650	<b>SG/RG16.5T16H</b>
500	500	750	<b>SG/RG20.5T20H</b>
600	600	900	<b>SG/RG24.5T20H</b>
700	700	1000	<b>SG/RG28.5T20H</b>
800	800	1100	<b>SG/RG32.5T20H</b>
900	900	1200	<b>SG/RG36.5T20H</b>


# Cable tray - Fittings and accessories 托盤曲及配件

## Reducer 刁士

Suitable for tray size 適用電纜托盤尺寸 (mm)	Dimension 尺寸 (mm)			Model: Single Flange 單摺邊式 (SG), Return Flange 勾摺邊式 (RG)
	A	B	C	
75 - 50	150	50	75	<b>SG/RG3.6T12H</b>
100 - 75	150	75	100	<b>SG/RG4.6T12H</b>
150 - 100	200	100	150	<b>SG/RG6.6T12H</b>
150 - 75	200	75	150	<b>SG/RG6.6T12H</b>
200 - 150	200	150	200	<b>SG/RG8.6T16H</b>
200 - 100	200	100	200	<b>SG/RG8.6T16H</b>
300 - 200	300	200	300	<b>SG/RG12.6T16H</b>
300 - 150	300	150	300	<b>SG/RG12.6T16H</b>
400 - 300	400	300	400	<b>SG/RG16.6T16H</b>
600 - 400	500	400	600	<b>SG/RG24.6T20H</b>

## Cable tray connector 茜駁片

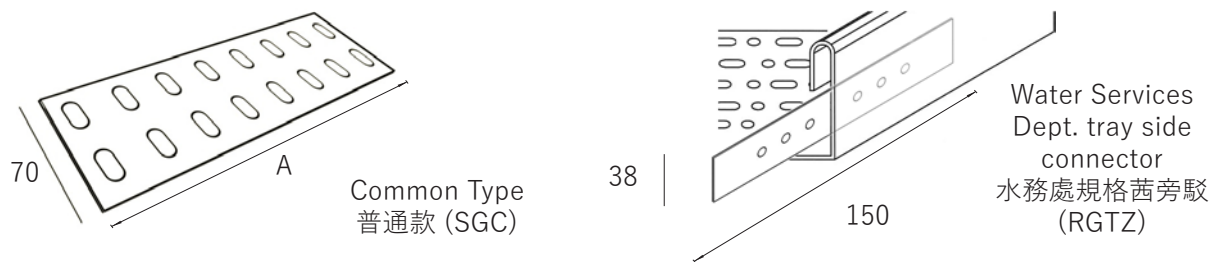

Cable Tray size 電纜托盤 (mm)	Dimension 尺寸 (mm)  A	Model number 型號			
		Galvanised Steel 鍍鋅鋼	Hot-dipped Galvanised 熱浸鋅	Stainless Steel SS304 不銹鋼 SS304	Stainless Steel 316 不銹鋼 SS316
50	40	<b>SGC2</b>	<b>SGC2H</b>	<b>SGC2S</b>	<b>SGC2X</b>
75	65	<b>SGC3</b>	<b>SGC3H</b>	<b>SGC3S</b>	<b>SGC3X</b>
100	90	<b>SGC4</b>	<b>SGC4H</b>	<b>SGC4S</b>	<b>SGC4X</b>
150	140	<b>SGC6</b>	<b>SGC6H</b>	<b>SGC6S</b>	<b>SGC6X</b>
200	190	<b>SGC8</b>	<b>SGC8H</b>	<b>SGC8S</b>	<b>SGC8X</b>
300	290	<b>SGC12</b>	<b>SGC12H</b>	<b>SGC12S</b>	<b>SGC12X</b>
400	390	<b>SGC16</b>	<b>SGC16H</b>	<b>SGC16S</b>	<b>SGC16X</b>
500	490	<b>SGC20</b>	<b>SGC20H</b>	<b>SGC20S</b>	<b>SGC20X</b>
600	590	<b>SGC24</b>	<b>SGC24H</b>	<b>SGC24S</b>	<b>SGC24X</b>
900	890	<b>SGC36</b>	<b>SGC36H</b>	<b>SGC36S</b>	<b>SGC36X</b>
-	150 x 38	<b>RGTZ</b>	<b>RGTZH</b>	<b>RGTZS</b>	<b>RGTZX</b>

## Cable Ladder 電纜梯架

---

### STANDARDS

BS1449, BSEN 10139,  
BSEN 10149, IEC61537

### 規格標準

BS1449, BSEN 10139,  
BSEN 10149, IEC61537

### RUNG SPACING

300mm

### 梯格距離

300mm

### MATERIAL

Galvanised Steel Sheet  
Mild Steel  
Stainless Steel Sheet SS304 (S) /  
SS316 (X)

### 原料

鍍鋅鋼板  
鋼板  
不銹鋼板SS304 (S), SS316 (X)

### LENGTH

Standard length of 2.44m,  
other lengths available on request

### 長度

標準2.44m,  
其他長度可按照客需要

### THICKNESS

2mm  
Other thicknesses under 2mm can be produced as needed

### 厚度

2mm  
其他厚度(2mm 以下) 可按要求製成

### FINISHES

Hot Dip Galvanised to BS729, ISO 1460, 1461 (H)  
Coloured Epoxy Powder Coating / High Grade Outdoor Powder (P)

### 表面處理


熱浸鋅符合標準BS729, ISO1460, 1461 (H)  
顏色聚脂油粉 / 高級戶外粉 (P)

Fittings and accessories meet the same standard and specifications as the ladders  
配件的規格及標準完全遵照及配合梯架而製成




# Cable Ladder and Accessories 電纜梯架及配件

## Cable Ladder 電纜梯架

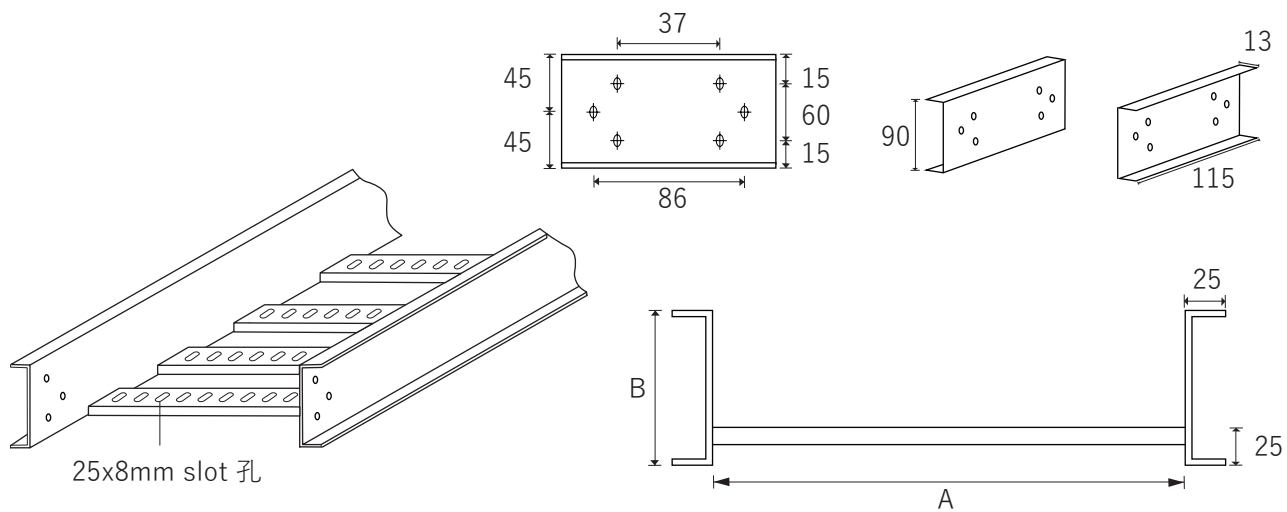


Cable Ladder Size 電纜梯架尺寸 (mm)	Dimension 尺寸 (mm)		Model Number 型號
	A	B	
150	150	100	<b>CL150T20H</b>
300	300	100	<b>CL300T20H</b>
450	450	100	<b>CL450T20H</b>
600	600	100	<b>CL600T20H</b>
900	900	100	<b>CL900T20H</b>
1000	1000	100	<b>CL1000T20H</b>


## 90° Mitre bend 90° 斜角曲



Flat Bend 正曲型



Internal Bend 內曲型




External Bend 外曲型

Suitable for Ladder size 適用電纜梯架尺寸 (mm)	Dimension 尺寸 (mm)						Model Number 型號		
	A	B	C	D	E	F	Flat Bend 正曲型	Internal Bend 內曲型	External Bend 外曲型
150	150	78	136	172	164	150	<b>CL150.1T20H</b>	<b>CL150.2T20H</b>	<b>CL150.4BT20H</b>
300	300	78	136	234	252	150	<b>CL300.1T20H</b>	<b>CL300.2T20H</b>	<b>CL300.4BT20H</b>
450	450	78	136	296	340	150	<b>CL450.1T20H</b>	<b>CL450.2T20H</b>	<b>CL450.4BT20H</b>
600	600	78	136	359	427	150	<b>CL600.1T20H</b>	<b>CL600.2T20H</b>	<b>CL600.4BT20H</b>
900	900	78	136	483	603	150	<b>CL900.1T20H</b>	<b>CL900.2T20H</b>	<b>CL900.4BT20H</b>
1000	1000	78	136	524	662	150	<b>CL1000.1T20H</b>	<b>CL1000.2T20H</b>	<b>CL1000.4BT20H</b>


Other sizes can be custom made  
其他尺寸可按客戶要求生產

## Cable Ladder and Accessories 電纜梯架及配件


### 135° Mitre bend 135° 斜角曲



Flat Bend 正曲型




Internal Bend 內曲型



External Bend 外曲型

Suitable for Ladder size 適用電線梯架尺寸 (mm)	Dimension 尺寸 (mm)			Model number 型號		
	A	B	C	Flat Bend 正曲型	Internal Bend 內曲型	External Bend 外曲型
150	150	172	150	CL150.11AT20H	CL150.11BT20H	CL150.11CT20H
300	300	234	150	CL300.11AT20H	CL300.11BT20H	CL300.11CT20H
450	450	296	150	CL450.11AT20H	CL450.11BT20H	CL450.11CT20H
600	600	359	150	CL600.11AT20H	CL600.11BT20H	CL600.11CT20H
900	900	483	150	CL900.11AT20H	CL900.11BT20H	CL900.11CT20H
1000	1000	524	150	CL1000.11AT20H	CL1000.11BT20H	CL1000.11CT20H


### Mitre tee 斜角三叉

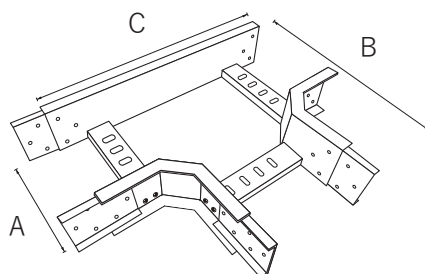

Suitable for Ladder size 適用電線梯架尺寸 (mm)	Dimension 尺寸 (mm)			Model number 型號
	A	B	C	
150	150	310	470	CL150.3T20H
300	300	460	620	CL300.3T20H
450	450	610	770	CL450.3T20H
600	600	760	920	CL600.3T20H
900	900	1060	1220	CL900.3T20H
1000	1000	1160	1320	CL1000.3T20H


# Cable Ladder and Accessories 電纜梯架及配件

## Mitre Cross 十字曲

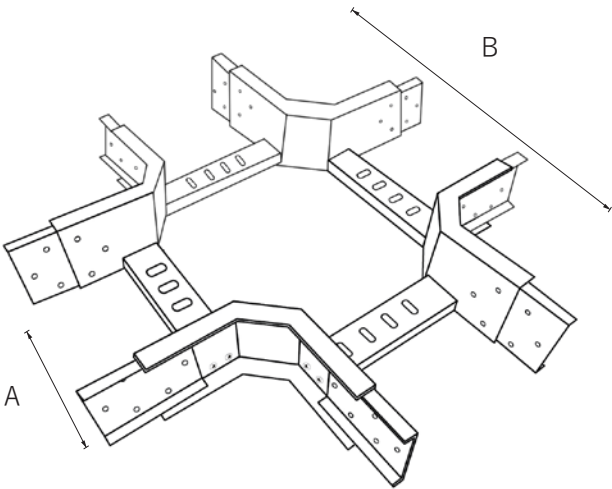


Suitable for Ladder size 適用電線梯架尺寸 (mm)	Dimension 尺寸 (mm)		Model Number 型號
	A	B	
150	150	470	<b>CL150.5T20H</b>
300	300	620	<b>CL300.5T20H</b>
450	450	770	<b>CL450.5T20H</b>
600	600	920	<b>CL600.5T20H</b>
900	900	1220	<b>CL900.5T20H</b>
1000	1000	1320	<b>CL1000.5T20H</b>


## Reducer 刁士



Equal 正刁士



Left 左刁士



Right 右刁士

Suitable for Ladder size 適用電線梯架尺寸 (mm)	Dimension 尺寸 (mm)				Model Number 型號
	A	B	C	D	
300 - 150	150	295	300	370	<b>CL300.6T20H</b>
450 - 300	300	295	450	370	<b>CL450.6T20H</b>
600 - 450	450	295	600	370	<b>CL600.6T20H</b>
900 - 600	600	370	900	520	<b>CL900.6T20H</b>
1200 - 900	900	370	1200	520	<b>CL1200.6T20H</b>

## Cable Basket 電線籃

---

### MATERIAL

50 x 50mm Mild Steel wire grid  
Stainless Steel wire grid SS304 (S),  
SS316 (X)

### 原料

50 x 50mm 鋼枝網  
不銹鋼網 SS304 (S), SS316 (X)

### LENGTH

2.12m  
Other lengths available on request

### 長度

標準2.12m,  
其他長度可按照客需要

### HEIGHT

50mm, 100mm  
Other heights can be made to order

### 高度

50mm, 100mm  
其他高度可按照客需要

### THICKNESS

4mm diameter rods  
Other diameter rods can be used

### 厚度

4mm 直徑圓枝  
其他直徑可以按客戶要求生產

### FINISHES

Electro Zinc Plated to IEC 61537:2006  
Hot Dip Galvanised to BS729, ISO 1460, 1461  
(H)  
Coloured Epoxy Powder Coating / High Grade  
Outdoor Powder (P)

### 表面處理


冷電度鋅 IEC61537 : 2006  
熱浸鋅符合標準 BS729, ISO1460, 1461 (H)  
顏色聚脂油粉 / 高級戶外粉 (P)

Fittings and accessories meet the same standard and  
specifications as the baskets  
配件的規格及標準完全遵照及配合線籃而製成



# Cable Basket 電線籃

## Cable Basket, Straight Length 電線籃,直身

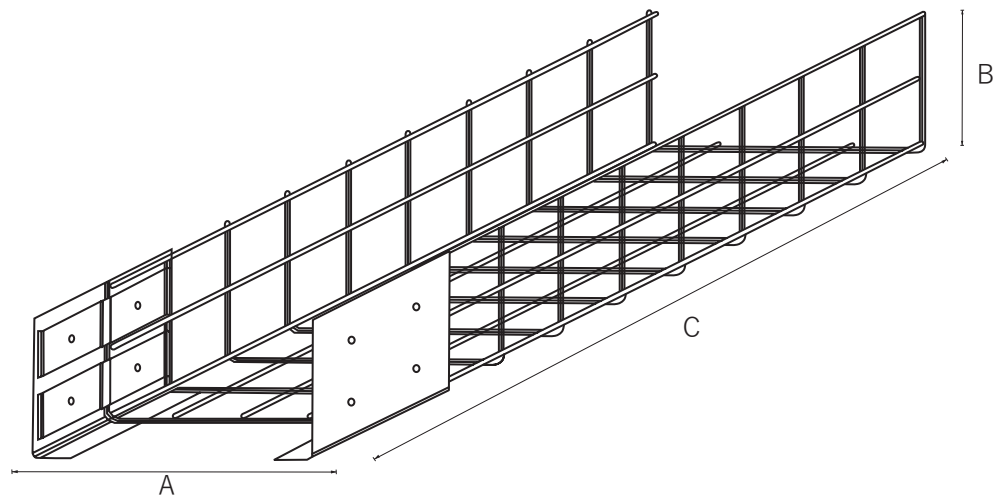


Cable Basket Size 電線籃尺寸 (mm)	Dimension 尺寸 (mm)			Model Number 型號
	A	B	C	
100	100	100	2122	<b>CAB4X4</b>
150	150	100	2122	<b>CAB6X4</b>
300	300	100	2122	<b>CAB12X4</b>
450	450	100	2122	<b>CAB18X4</b>
600	600	100	2122	<b>CAB24X4</b>
900	900	100	2122	<b>CAB36X4</b>

Other sizes can be custom made  
其他尺寸可按客戶要求生產


## Cable Basket and Accessories 電線籃及配件

### 90° Bend 籃曲

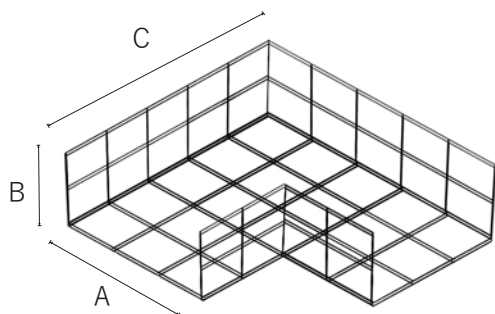


Suitable for basket size 適用電線籃尺寸 (mm)	Dimension 尺寸 (mm)			Model Number 型號
	A	B	C	
100	100	100	200	<b>CAB4X4.1</b>
150	150	100	250	<b>CAB6X4.1</b>
300	300	100	400	<b>CAB12X4.1</b>
450	450	100	550	<b>CAB18X4.1</b>
600	600	100	700	<b>CAB24X4.1</b>
900	900	100	1000	<b>CAB36X4.1</b>

### Tee 三叉

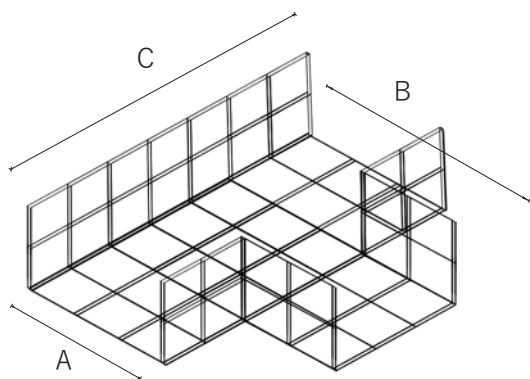

Suitable for basket size 適用電線籃尺寸 (mm)	Dimension 尺寸 (mm)			Model Number 型號
	A	B	C	
100	100	200	300	<b>CAB4X4.3</b>
150	150	250	350	<b>CAB6X4.3</b>
300	300	400	500	<b>CAB12X4.3</b>
450	450	550	650	<b>CAB18X4.3</b>
600	600	700	800	<b>CAB24X4.3</b>
900	900	1000	1100	<b>CAB36X4.3</b>

### Connecting plates 旁駁



Connecting plates for Basket height (mm) 駁片高度	Model Number 型號 (per pair 每對)
50	<b>CABB1</b>
100	<b>CABB2</b>

## Cable Basket and Accessories 電線籃及配件

Fast, Flexible: Self-Assembly Bends 快捷, 靈活: 自組件線籃曲

### 90° Bend 籃曲


### Tee 三叉

#### L-shaped connector

#### L 型旁駁

CABB4.L (100mm tall 高)

CABB2.L (50mm tall 高)

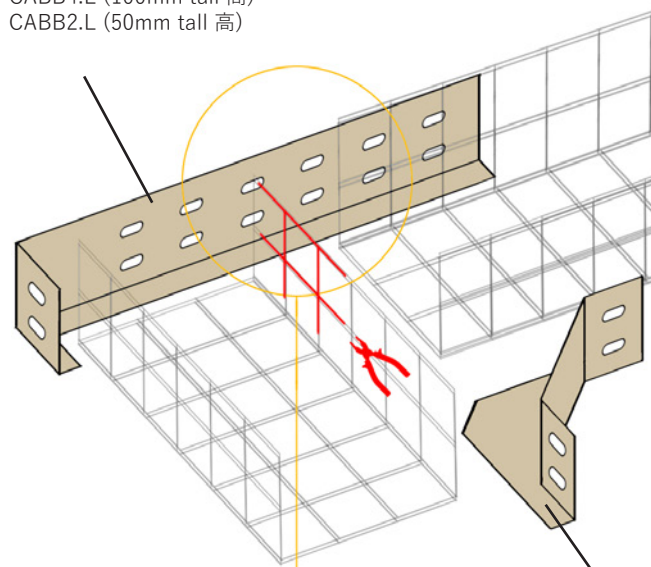


#### Angle connector

#### 斜邊旁駁

CABB4.G (100mm tall 高)


CABB2.G (50mm tall 高)



#### Double-hole flat connector

#### 雙孔波浪型駁片

CABBSGC2

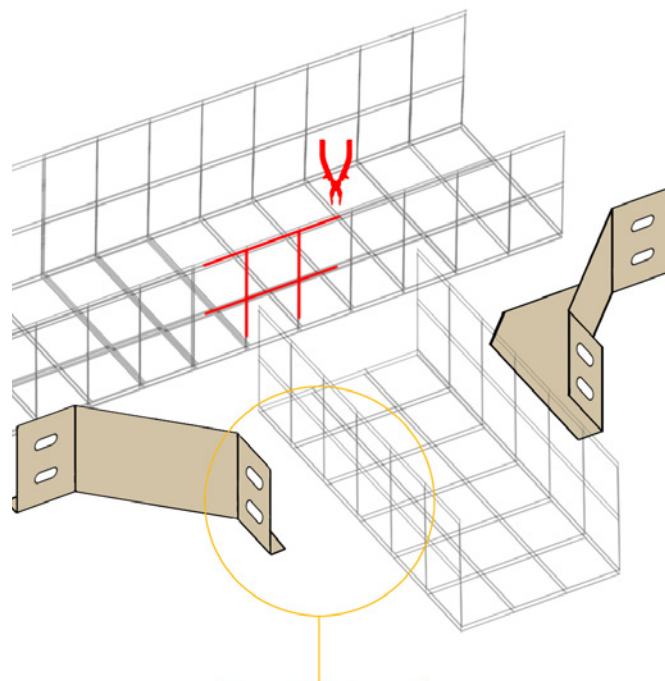

#### Screw set

螺絲, 絲母, 平介, 彈介  
CABBTA5

#### Single-hole flat connector

單孔波浪型駁片  
CABBSGC1

Bend type (Set) / Model number 曲款 (套裝) / 型號		Part quantities (each set) 配件數量 (每套裝)				
		L - shaped connector L 型旁駁	Angle connector 斜邊旁駁	Double-hole flat connector 雙孔波浪型駁片	Single-hole flat connector 單孔波浪型駁片	Screw set (screw, nut, flat and spring washer) 螺絲, 絲母, 平介, 彈介
90 degree bend (100mm tall) 90度曲 100mm高	<b>CABB4.1</b>	1	1	2	6	10
90 degree bend (50mm tall) 90度曲 50mm高	<b>CABB2.1</b>	1	1	1	3	5
Tee bend (100mm tall) 三叉曲 100mm高	<b>CABB4.3</b>	0	2	0	8	8
Tee bend (50mm tall) 三叉曲 50mm高	<b>CABB2.3</b>	0	2	0	4	4

## Waterproof Trunking 防水線槽

---

### STANDARDS

BS 4678 Part 1 Class 2 & 3 Corrosion Protection, BS1449, BSEN 50085-1,2-1, IEC 61084-1,2-1, BSEN 10139, EN 10143, BSEN 10149, IPX4 to IEC60529:2001

### 規格標準

BS 4678 Part 1 Class 2 & 3 抗蝕保護, BS1449, BSEN 50085-1,2-1, IEC 61084-1,2-1, BSEN 10139, EN 10143, BSEN 10149, IPX4 to IEC60529:2001

### TRUNKING COVER TYPE

Screw fix with rubber gasket between trunking and cover

### 槽蓋款式

螺絲蓋, 槽邊有防水膠邊

### MATERIAL

Galvanised Steel Sheet  
Mild Steel  
Stainless Steel Sheet SS304 (S), SS316 (X)

### 原料

鍍鋅鋼板  
鋼板  
不銹鋼板SS304 (S), SS316 (X)

### LENGTH

Standard length of 2.44m  
Other lengths available on request

### 長度

標準2.44m,  
其他長度可按照客需要

### THICKNESS

Comply to BS 4678  
Other thicknesses can be made  
(0.9mm -2.0mm )

### 厚度

符合BS 4678要求  
其他厚度由0.9mm -2.0mm 可按要求生產

### FINISHES

Hot Dip Galvanized to BS729, ISO1460, 1461 (H)  
Coloured Epoxy Powder Coating / High Grade Outdoor Powder (P)

### 表面處理

熱浸鋅符合標準BS729, ISO1460, 1461 (H)  
顏色聚脂油粉 / 高級戶外粉 (P)

### SEPARATE COMPARTMENTS



2 compartment (D), or multi compartment (T)  
as requested

### 槽內間格

可按照客人的要求製成二倉式(D), 多倉式(T)

Fittings and accessories meet the same standard and specifications as trunkings  
線槽配件的規格及標準完全遵照及配合電線槽而製成


# Waterproof Trunking 防水線槽

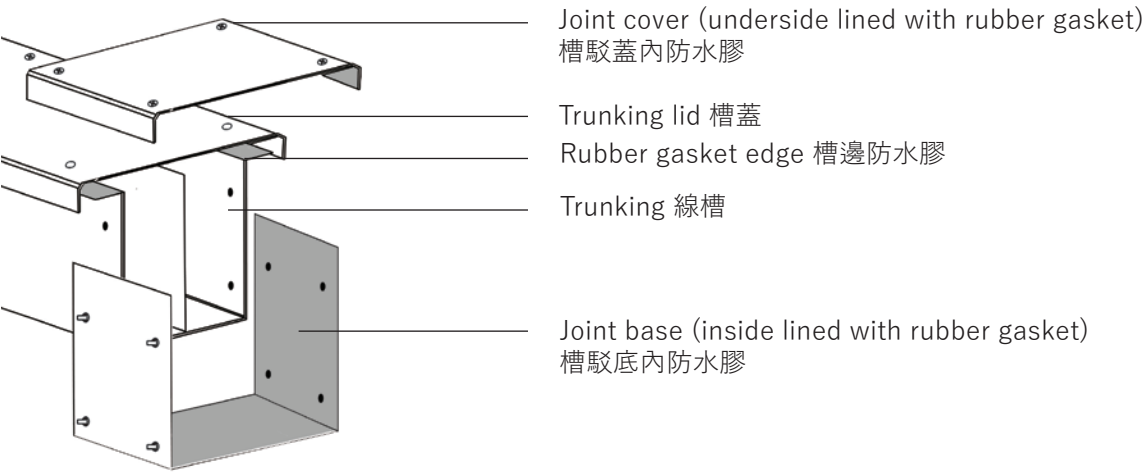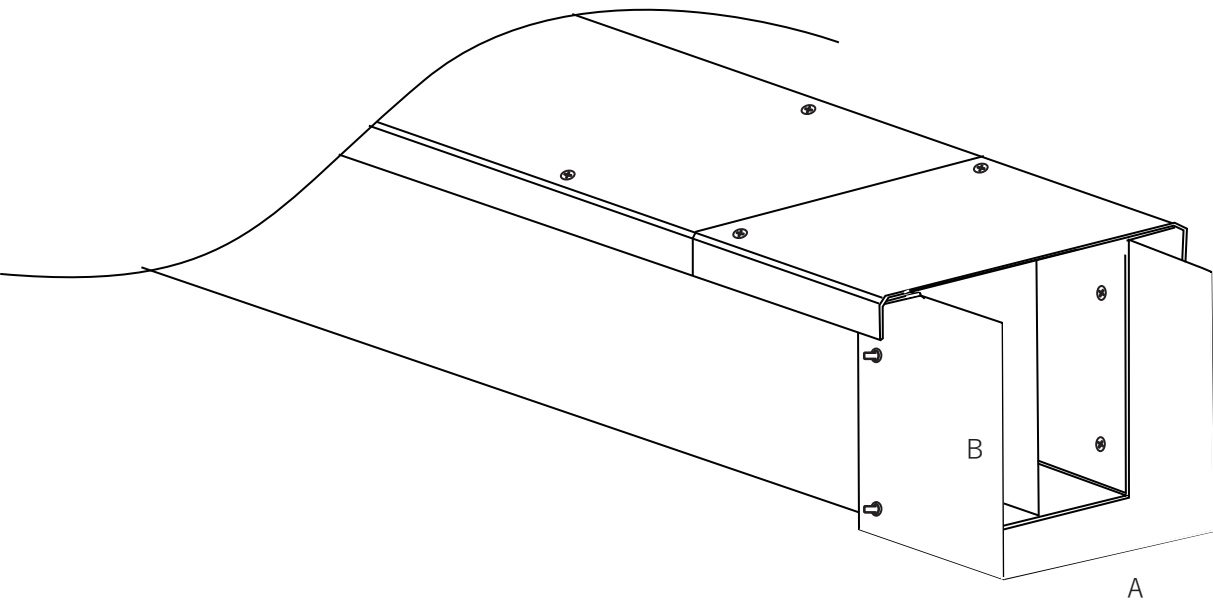


Cable trunking size 槽尺寸 (mm)	Dimension 尺寸 (mm)		Model Number 型號	
	A	B	Waterproof Cable Trunking 防水槽	Multi-Compartment Waterproof Cable Trunking 分格式防水槽
75 x 50	75	50	WT3X2T12	WT3X2T12D
75 x 75	75	75	WT3X3T12	WT3X3T12D
100 x 75	100	75	WT4X3T12	WT4X3T12D
100 x 100	100	100	WT4X4T14	WT4X4T14D
150 x 100	150	100	WT6X4T14	WT6X4T14D
150 x 150	150	150	WT6X6T16	WT6X6T16D
200 x 150	200	150	WT8X6T16	WT8X6T16D
200 x 200	200	200	WT8X8T16	WT8X8T16D

Other sizes can be custom made 其他尺寸可按客戶要求生產

# Waterproof Trunking Accessories 防水線槽配件

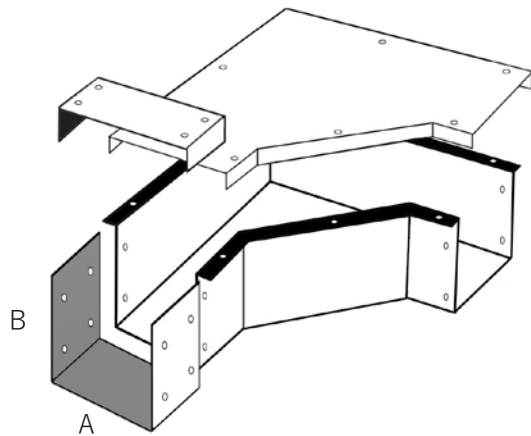

90 degree bend 90度曲

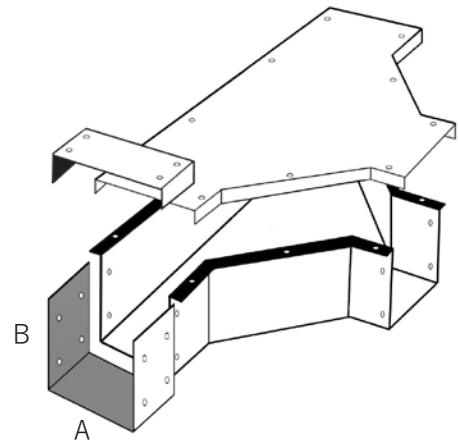

Tee bend 三叉曲

For Cable trunking size 配槽尺寸 (mm)	Dimension 尺寸 (mm)		Model Number 型號	
	A	B	90 degree bend 90度曲	Tee bend 三叉曲
75 x 50	75	50	<b>WT3X2.1T12</b>	<b>WT3X2.3T12</b>
75 x 75	75	75	<b>WT3X3.1T12</b>	<b>WT3X3.3T12</b>
100 x 75	100	75	<b>WT4X3.1T12</b>	<b>WT4X3.3T12</b>
100 x 100	100	100	<b>WT4X4.1T14</b>	<b>WT4X4.3T14</b>
150 x 100	150	100	<b>WT6X4.1T14</b>	<b>WT6X4.3T14</b>
150 x 150	150	150	<b>WT6X6.1T16</b>	<b>WT6X6.3T16</b>
200 x 150	200	150	<b>WT8X6.1T16</b>	<b>WT8X6.3T16</b>
200 x 200	200	200	<b>WT8X8.1T16</b>	<b>WT8X8.3T16</b>



## Skirting Trunking 牆邊線槽

---

### STANDARDS

BS 4678 Part 1 Class 2 & 3 Corrosion Protection, BS1449, BSEN 50085-1,2-1, IEC 61084-1, 2-1, BSEN 10139, EN 10143, BSEN 10149

### 規格標準

BS 4678 Part 1 Class 2 & 3 抗蝕保護, BS1449, BSEN 50085-1,2-1, IEC 61084-1, 2-1, BSEN 10139, EN 10143, BSEN 10149

### TRUNKING COVER TYPE

Screw fix

### 槽蓋款式

螺絲蓋

### MATERIAL

Galvanised Steel Sheet  
Mild Steel  
Stainless Steel Sheet SS304 (S), SS316 (X)

### 原料

鍍鋅鋼板  
鋼板  
不銹鋼板SS304 (S), SS316 (X)

### LENGTH

Standard length of 2.44m,  
Other lengths available on request

### 長度

標準2.44m,  
其他長度可按照客需要

### THICKNESS

Comply to BS 4678  
Other thicknesses can be made  
(0.9mm -2.0mm )

### 厚度

符合BS 4678要求  
其他厚度由0.9mm -2.0mm 可按要求生產

### FINISHES

Hot Dip Galvanized to BS729, ISO1460, 1461 (H)  
Coloured Epoxy Powder Coating / High Grade Outdoor Powder (P)

### 表面處理

熱浸鋅符合標準BS729, ISO1460, 1461 (H)  
顏色聚脂油粉 / 高級戶外粉 (P)

### SEPARATE COMPARTMENTS

2 compartment (D), or multi compartment (T)  
as requested


### 槽內間格

可按照客人的要求製成二倉式(D), 多倉式(T)

Fittings and accessories meet the same standard and specifications as trunkings  
線槽配件的規格及標準完全遵照及配合電線槽而製成

## Skirting Trunking and Fittings 牆邊線槽及配件

### Skirting Trunking 牆邊線槽

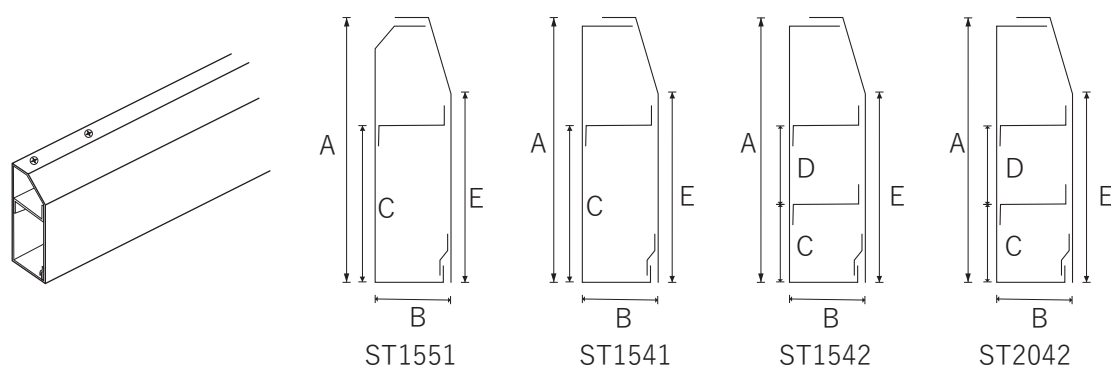


Model Number 型號	Dimension 尺寸 (mm)				
	A	B	C	D	E
ST1551	150	50	100	-	113
ST1541	150	40	100	-	113
ST1542	150	40	75	38	126
ST2042	200	40	100	50	163

### 90° Bend 90° 曲



Suitable for 適用於	Model Number 型號	
	Internal Opening 內開蓋型	External opening 外開蓋型
ST1551	<b>IB1551</b>	<b>EB1551</b>
ST1541	<b>IB1541</b>	<b>EB1541</b>
ST1542	<b>IB1542</b>	<b>EB1542</b>
ST2042	<b>IB2042</b>	<b>EB2042</b>


### Accessories 配件

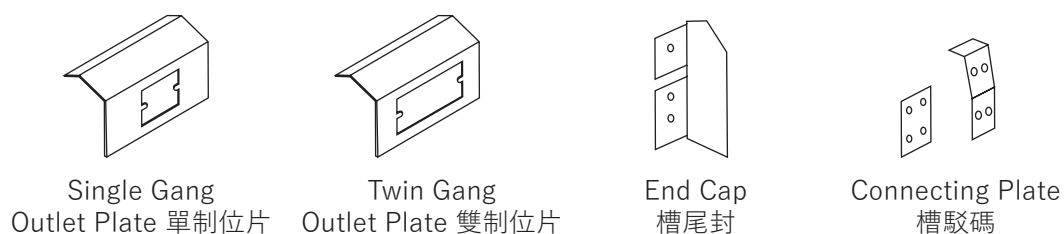


Suitable for 適用於	Model Number 型號			
	Single Gang Outlet Plate 單制位片	Twin Gang Outlet Plate 雙制位片	End Cap 槽尾封	Connecting Plate 槽駁碼
ST1551	<b>CCS1551</b>	<b>CCD1551</b>	<b>FEC1551</b>	<b>CP1551</b>
ST1541	<b>CCS1541</b>	<b>CCD1541</b>	<b>FEC1541</b>	<b>CP1541</b>
ST1542	<b>CCS1542</b>	<b>CCD1542</b>	<b>FEC1542</b>	<b>CP1542</b>
ST2042	<b>CCS2042</b>	<b>CCD2042</b>	<b>FEC2042</b>	<b>CP2042</b>

## Floor trunking types 地槽 - 款式


### Raised floor trunking 地台線槽

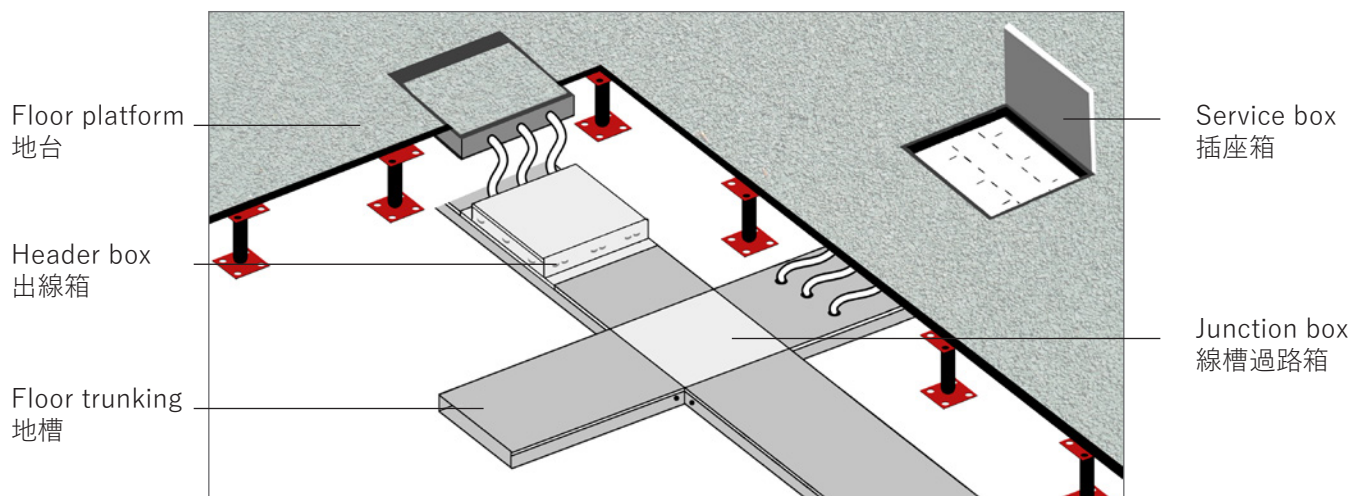

### Underfloor trunking 藏地線槽

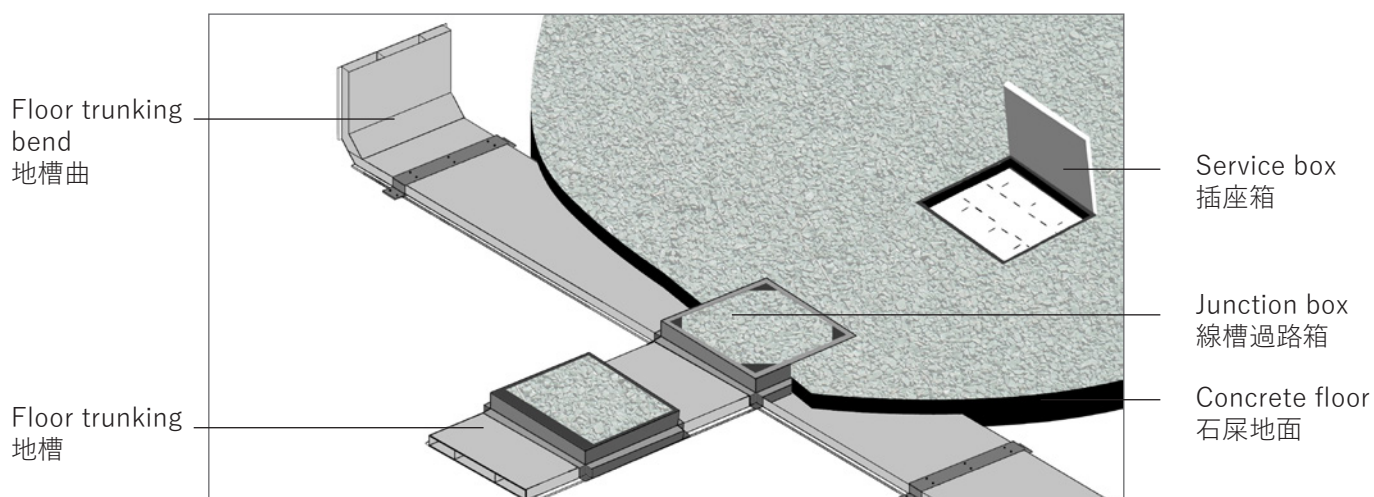

### Flushfloor trunking 平地線槽

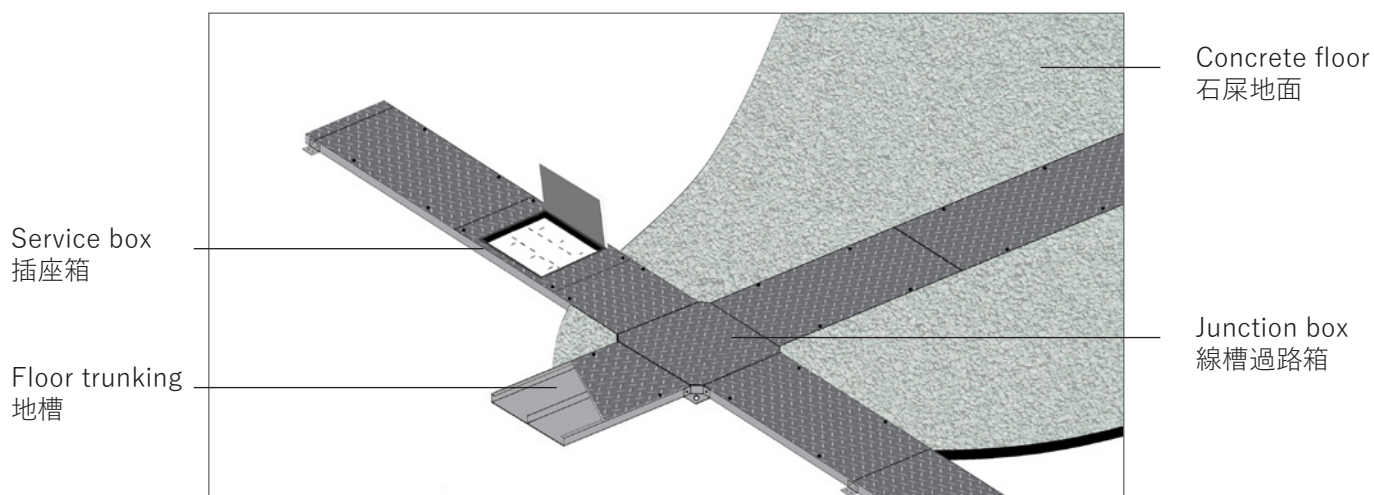

## Raised floor trunking 地台線槽

---

### STANDARDS

BS 4678 Part 1 Class 2 & 3 Corrosion Protection, BS1449, BSEN 50085-1, IEC 61084-1, BSEN 10139, EN 10143, BSEN 10149

### 規格標準

BS 4678 Part 1 Class 2 & 3 抗蝕保護, BS1449, BSEN 50085-1, IEC 61084-1, BSEN 10139, EN 10143, BSEN 10149

### TRUNKING COVER TYPE

Centre Caption (QT)  
Screw Fix (ST)  
Clip Fix (CT)

### 槽蓋款式

肚臍蓋(QT)  
螺絲蓋(ST)  
彈夾蓋(CT)

### MATERIAL

Galvanised Steel Sheet  
Mild Steel  
Stainless Steel Sheet SS304 (S), SS316 (X)

### 原料

鍍鋅鋼板  
鋼板  
不銹鋼板SS304 (S), SS316 (X)

### LENGTH

Standard length of 2.44m,  
Other lengths available on request

### 長度

標準2.44m,  
其他長度可按照客需要

### THICKNESS

Comply to BS 4678  
Other thicknesses can be made  
(0.9mm -2.0mm )

### 厚度

符合BS 4678要求  
其他厚度由0.9mm -2.0mm 可按要求生產

### FINISHES

Hot dip galvanized to BS729, ISO1460, 1461 (H)  
Coloured Epoxy powder coating / High Grade outdoor powder (P)

### 表面處理

熱浸鋅符合標準BS729, ISO1460, 1461 (H)  
顏色聚脂油粉 / 高級戶外粉 (P)

### SEPARATE COMPARTMENTS

2 compartment (D), or multi compartment (T)  
as requested


### 槽內間格

可按照客人的要求製成二倉式(D), 多倉式(T)


Fittings and accessories meet the same standard and specifications as trunkings  
線槽配件的規格及標準完全遵照及配合電線槽而製成

## Raised floor trunking and boxes 地台線槽及箱


### Raised floor trunking 地台線槽

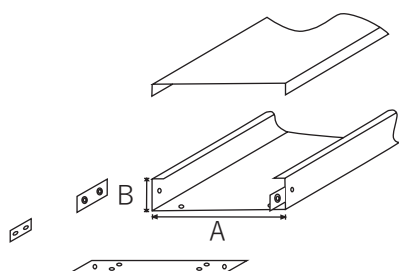

Standard type 標準型

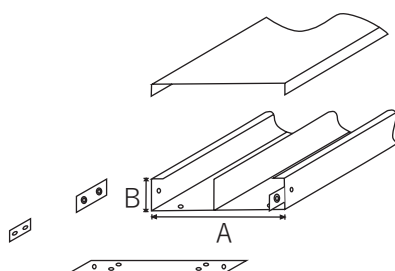


2 compartment type 2 倉型

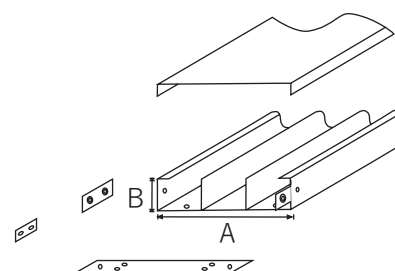



3 compartment type 3 倉型

Raised floor trunking size 地台槽尺寸 (mm)	Dimension 尺寸 (mm)		Standard Type 標準型	Model Number 型號	
	A	B		2-C Type 2倉型	3-C Type 3倉型
150 x 50	150	50	RF5015	RFD5015	RFT5015
200 x 50	200	50	RF5020	RFD5020	RFT5020
250 x 50	250	50	RF5025	RFD5025	RFT5025
300 x 50	300	50	RF5030	RFD5030	RFT5030
150 x 75	150	75	RF7515	RFD7515	RFT7515
200 x 75	200	75	RF7520	RFD7520	RFT7520
250 x 75	250	75	RF7525	RFD7525	RFT7525
300 x 75	300	75	RF7530	RFD7530	RFT7530

### Junction box, Header box 線槽過路箱, 槽頂出線箱

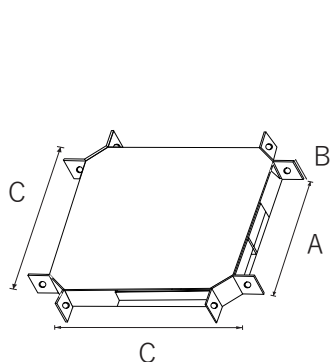

Junction Box 線槽過路箱

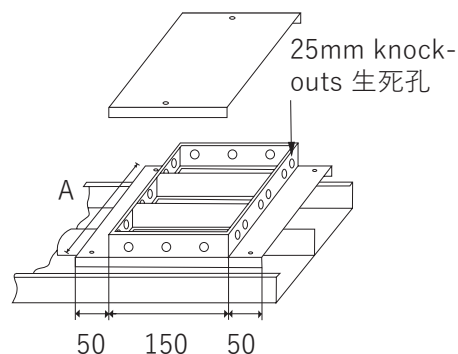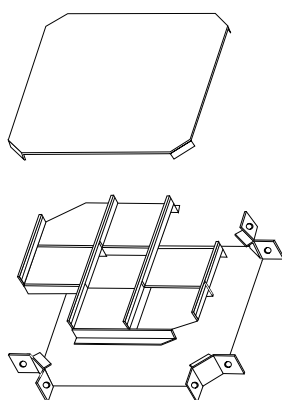


Header Box 槽頂出線箱

Raised floor trunking size 地台槽尺寸 (mm)	Dimension 尺寸 (mm)			Model number 型號			Header Box 出線箱
	A	B	C	Standard Type 標準型	Junction Box 線槽箱 2-C Type 2倉型	3-C Type 3倉型	
150 x 50	150	50	250	RJB5015	RJBD5015	RJBT5015	BXHB15
200 x 50	200	50	300	RJB5020	RJBD5020	RJBT5020	BXHB20
250 x 50	250	50	350	RJB5025	RJBD5025	RJBT5025	BXHB25
300 x 50	300	50	400	RJB5030	RJBD5030	RJBT5030	BXHB30
150 x 75	150	75	250	RJB7515	RJBD7515	RJBT7515	BXHB15
200 x 75	200	75	300	RJB7520	RJBD7520	RJBT7520	BXHB20
250 x 75	250	75	350	RJB7525	RJBD7525	RJBT7525	BXHB25
300 x 75	300	75	400	RJB7530	RJBD7530	RJBT7530	BXHB30



Revolutionary semi-circle hinge  
allows easy optional lid removal  
首創半圓形較位, 簡單設計, 更簡單拆蓋

Panel options and selec-  
tions available  
手抽旁片和蓋面可挑選款式

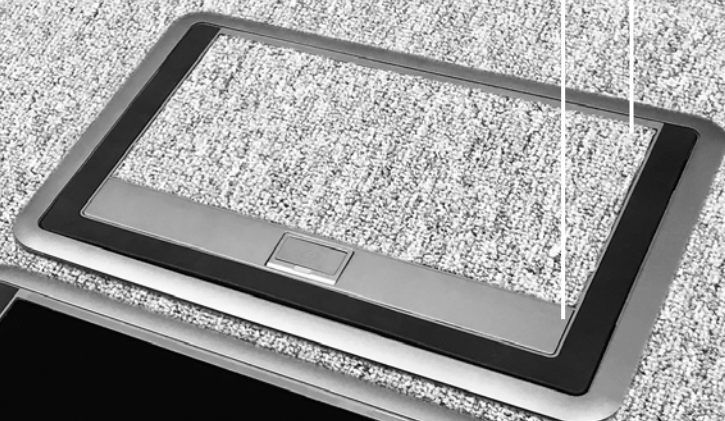

3-direction (left right front)  
silicone-lip wire exits  
3邊軟膠出線, 插電隨心所欲



## Our award-winning concept, available now 誠意推出獲獎革新概念

The Lik Hung floor service box  
力雄LHFB插座箱

Winner of 2018  
Asia Interna-  
tional Innova-  
tive Invention  
Award - Gold  
發明大獎 - 金獎

Design led  
by multi-  
award-winning  
German indus-  
trial designer.  
德國設計師引領

Design /  
features  
patented.  
獲數項專利

Lid loading rated  
to withstand  
over 4KN  
(400kg)  
負載 > 400kg


Side frame made  
of glass-fibre  
nylon for extra  
strength.  
框架選用玻璃纖維

IEC(EN) 60670-1  
and 60670-23  
Lab certified.  
IEC 規格認可

Extensive job  
refs. (eg. HKIA,  
EMSD HQ)  
多項實例 (香港機  
場, 機電署總部)




## Raised floor Service box (New Model 6 way) 地台插座箱 (新款 6位)

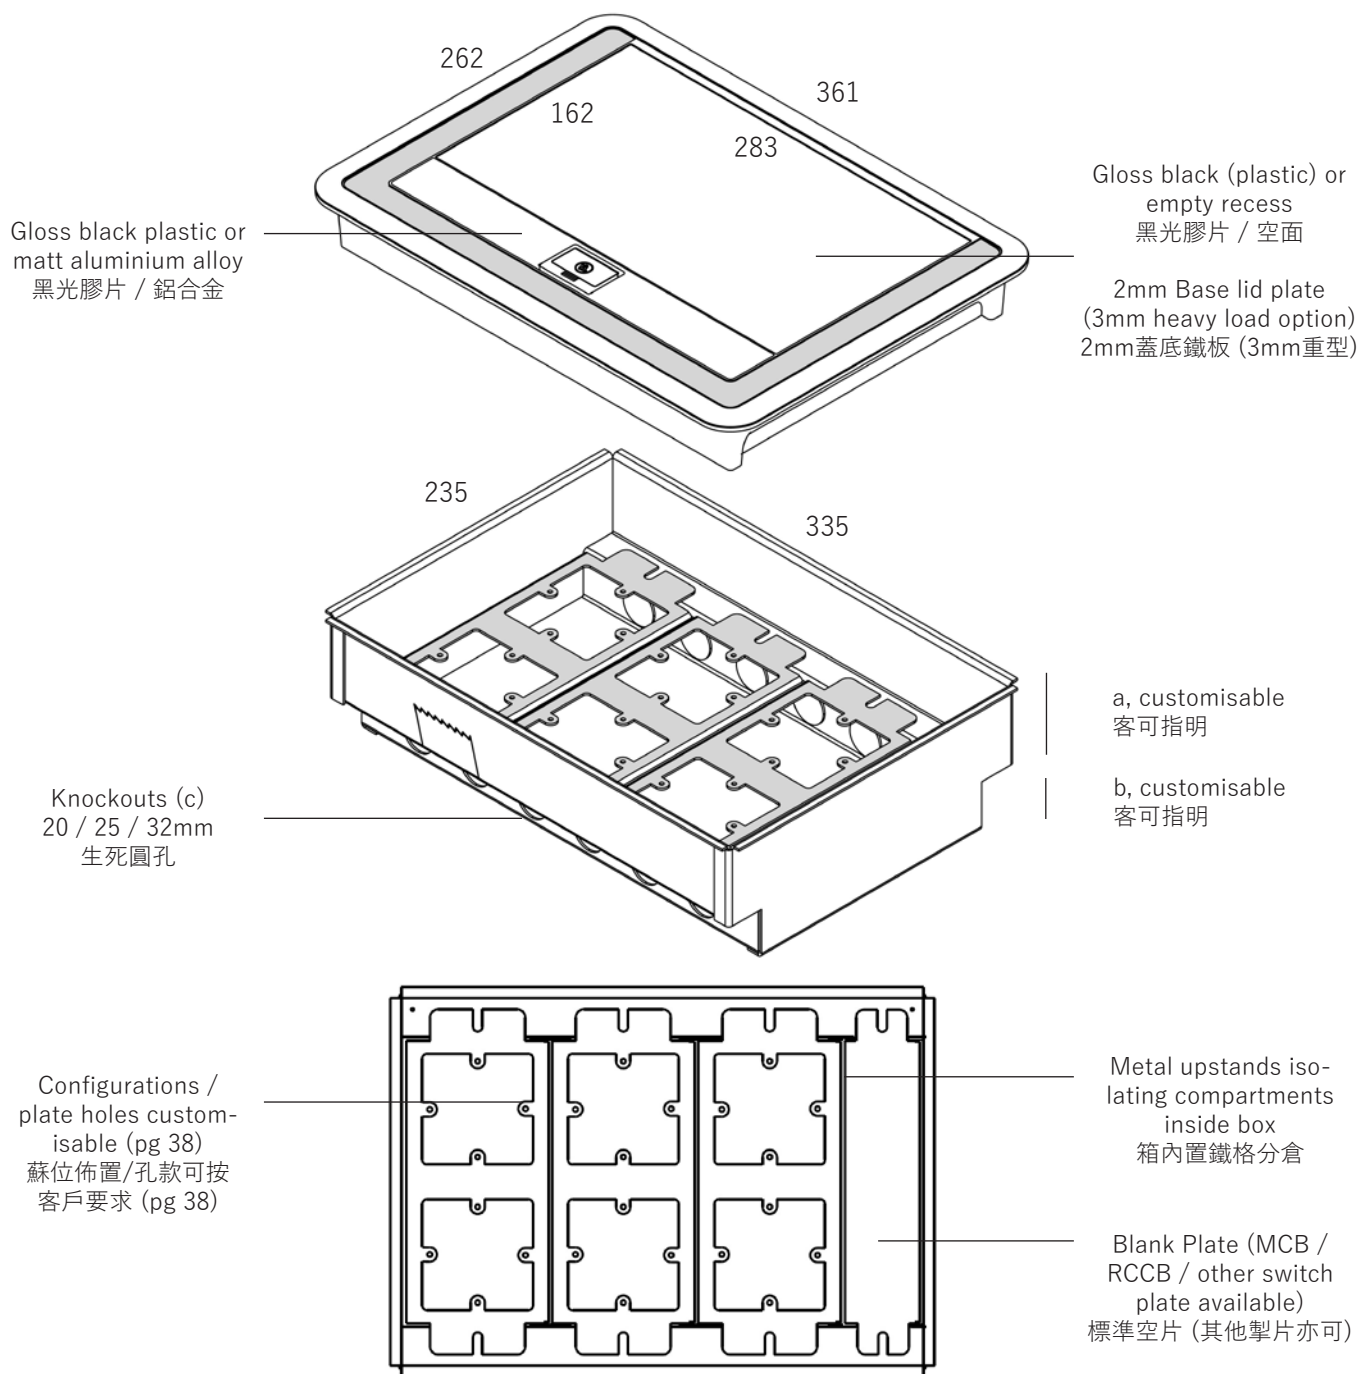

Model Number 型號	Socket number 可配蘇位	Standard model dimensions 標準款式尺寸 (mm)					Standard Socket Configuration 標準蘇位佈置		Main panel options 主面選擇	Handle Panel options 手抽旁片選擇
		a	b	knockout diameter c 生死孔 直徑 c	Lid plate thickness 蓋底鐵板厚		13a socket plate 蘇片	Blank plate 空片	Empty (standard) 空 (標準)	Aluminium alloy (standard) 鋁合金 (標準)
LHFB2525R	6	53	32	20	2		x3	x1	Black plastic 黑膠	Black plastic 黑膠

Bespoke mounting plates / socket numbers can be made / expanded 可要求特款座片或容納更多蘇位

## Raised floor Service box (New Model 4,9 way) 地台插座箱 (新款 4,9位)

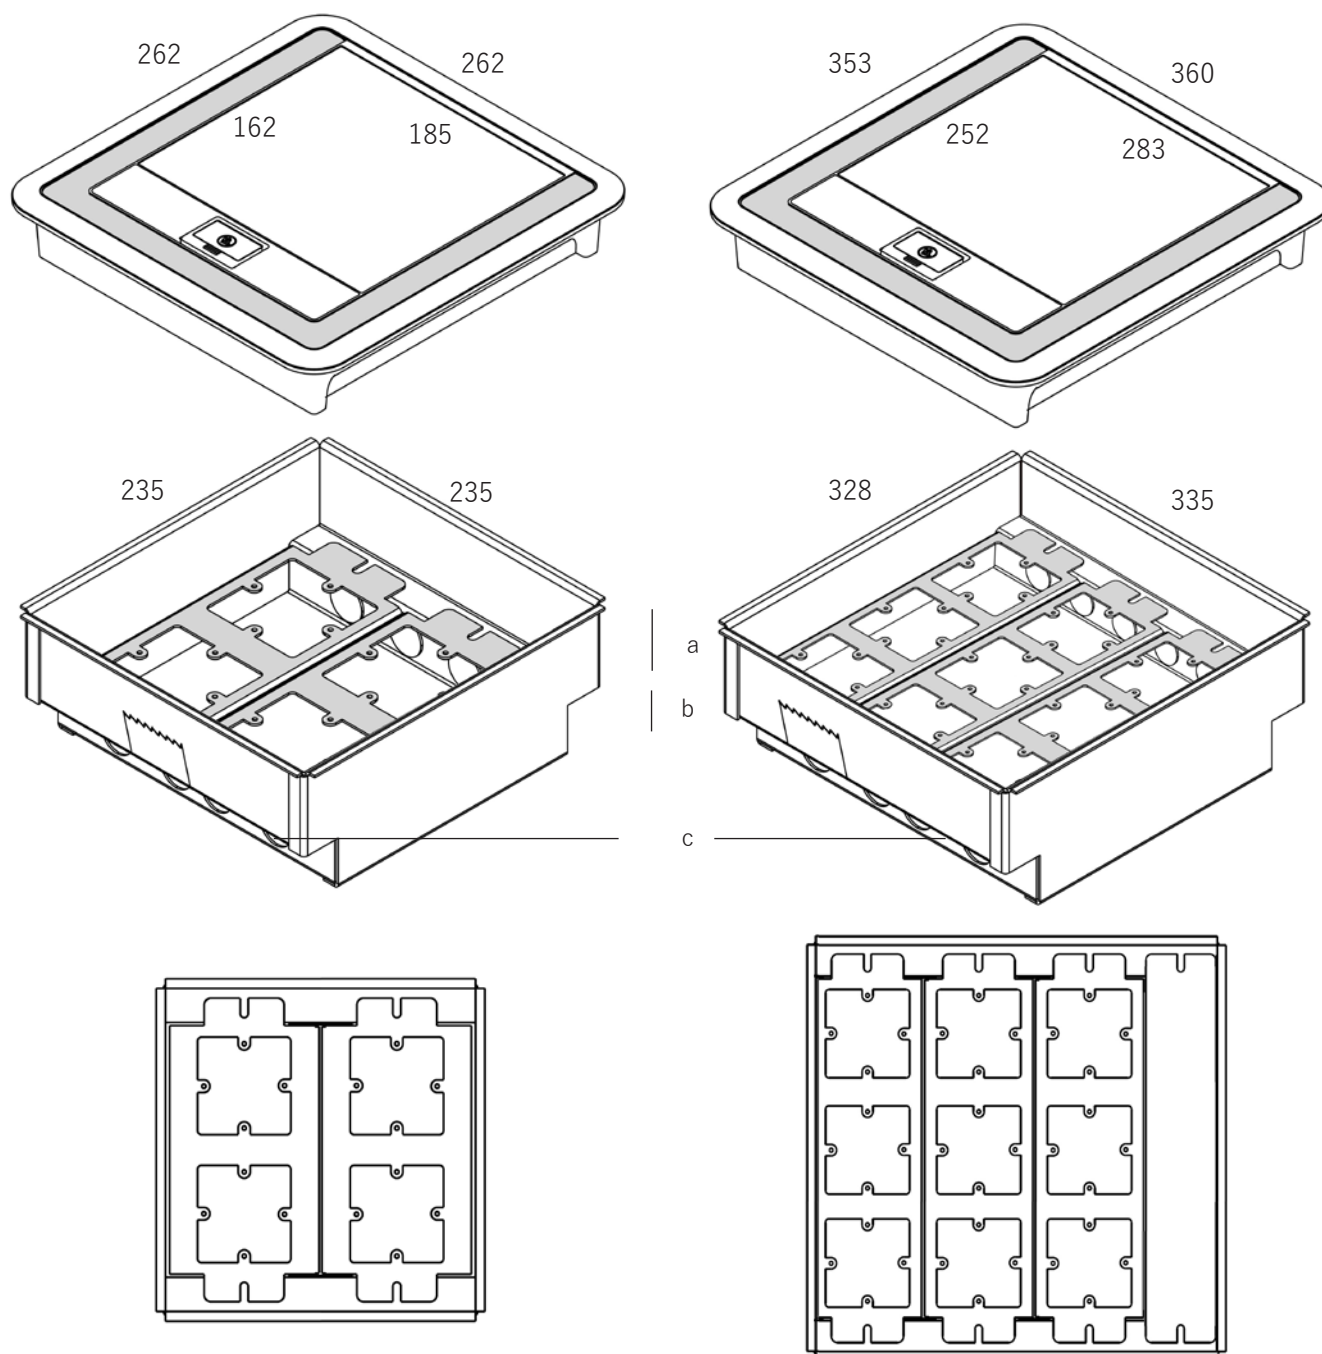


Model Number 型號	Socket number 可配蘇位	Standard model dimensions 標準款式尺寸 (mm)				Standard Socket Configuration 標準蘇位佈置		Main panel options 主面選擇	Handle Panel options 手抽旁片選擇
		a	b	knockout diameter c 生死孔 直徑c	Lid plate thickness 蓋底鐵板厚	13a socket plate 蘇片	Blank plate 空片	Empty (standard) 空 (標準)	Aluminium alloy (standard) 鋁合金 (標準)
LHFB2020R	4	53	32	20	2	x2	0		
LHFB3030R	9	53	32	20	2	x3	x1	Black plastic 黑膠	Black plastic 黑膠


Bespoke mounting plates / socket numbers can be made / expanded 可要求特款座片或容納更多蘇位

Socket mounting plates for LHFB 插座箱 - 插座底片

Available for 4, 6, 9 way LHFB boxes 可訂配用於 4, 6, 9位 LHFB 箱

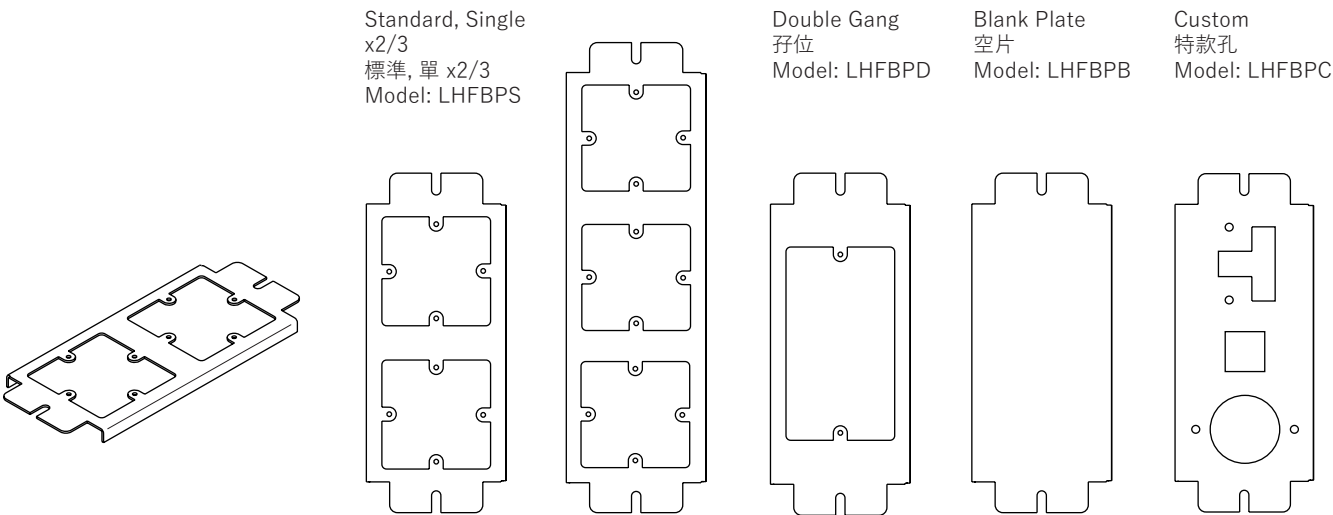

Raised floor Service box (Previous Model) 地台插座箱 (舊款)

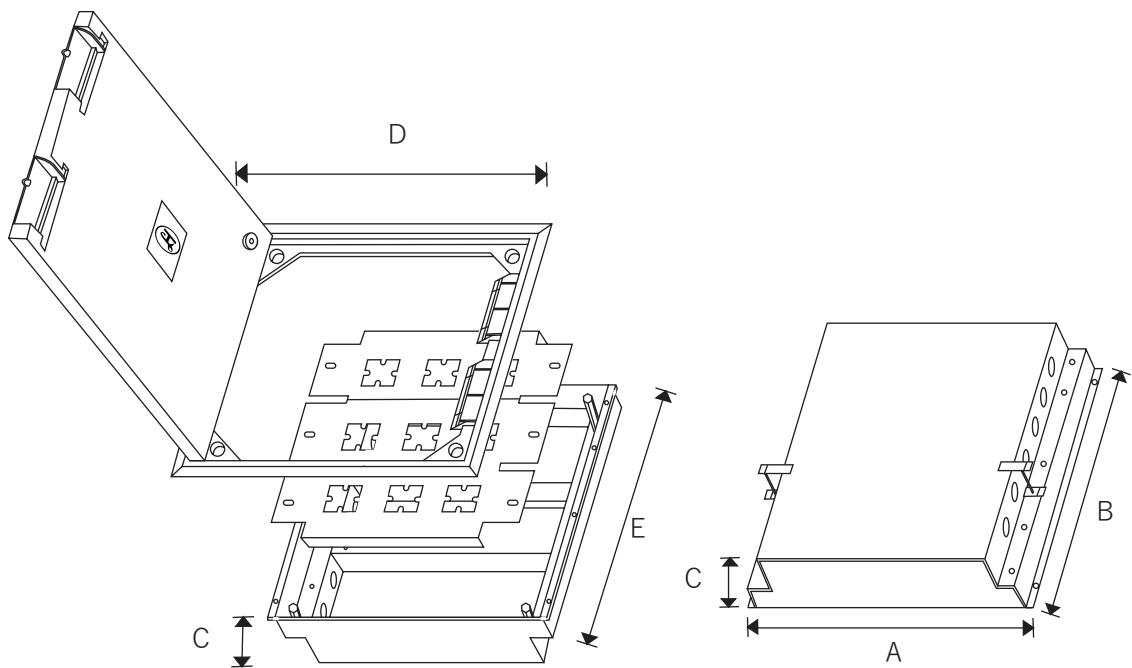

Socket number 蘇位	Dimension 尺寸 (mm)					Model number 型號
	A	B	C	D	E	
6	260	270	75	280	280	<b>SBX2525R</b>
9	330	330	75	355	355	<b>SBX3025R</b>

## Underfloor Trunking 藏地線槽

---

### STANDARDS

BS 4678 Part 2 Class 2 & 3 Corrosion Protection, BS1449, IEC 61084-1, 2-2, BSEN 10139, EN 10143, BSEN 10149, IPX4 according to IEC 60529

### 規格標準

BS 4678 Part 2 Class 2 & 3 抗蝕保護, BS1449, IEC 61084-1, 2-2, BSEN 10139, EN 10143, BSEN 10149, IPX4 (IEC 60529)

### TRUNKING COVER TYPE

Completely sealed design, can be connected together to form a distribution network under the floor

### 槽蓋款式

全密封式設計, 地槽潛藏在地下互相接駁

### MATERIAL

Galvanised Steel Sheet  
Mild Steel  
Stainless Steel Sheet SS304 (S), SS316 (X)

### 原料

鍍鋅鋼板  
鋼板  
不銹鋼板SS304 (S), SS316 (X)

### LENGTH

Standard length of 2.44m,  
Other lengths available on request

### 長度

標準2.44m,  
其他長度可按照客需要

### THICKNESS

Comply to HK government projects  
Other thicknesses can be made  
(0.9mm -2.0mm )

### 厚度

符合香港政府相關部門要求  
其他厚度由0.9mm -2.0mm 可按要求生產

### FINISHES

Hot Dip Galvanized to BS729, ISO1460, 1461 (H)  
Coloured Epoxy Powder Coating / High Grade Outdoor Powder (P)

### 表面處理

熱浸鋅符合標準BS729, ISO1460, 1461 (H)  
顏色聚脂油粉 / 高級戶外粉 (P)

### SEPARATE COMPARTMENTS

2 compartment (D), or multi compartment (T)  
as requested


### 槽內間格

可按照客人的要求製成二倉式(D), 多倉式(T)

Fittings and accessories meet the same standard and specifications as trunkings  
線槽配件的規格及標準完全遵照及配合電線槽而製成


## Underfloor Trunking and bends 藏地線槽及配件

### Underfloor trunking 藏地線槽

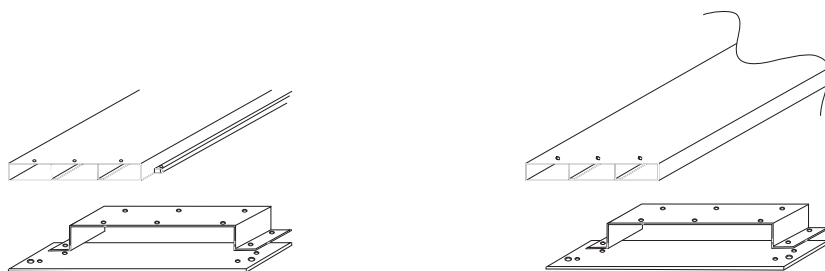

A type (Sealed Lid 密封蓋)

B type (Removable Lid 活動蓋)

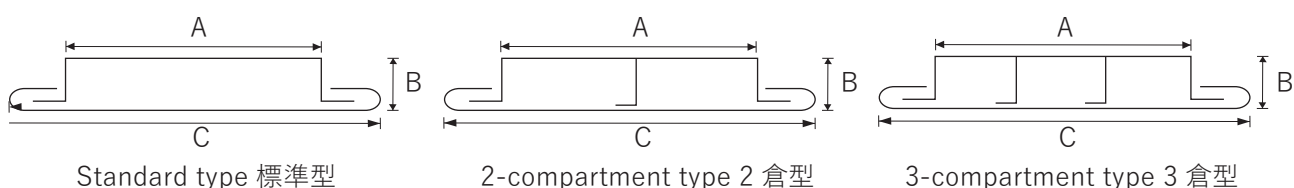


Standard type 標準型

2-compartment type 2 倉型


3-compartment type 3 倉型

Underfloor Trunking Size 藏地槽尺寸	Dimension 尺寸 (mm)			Model Number 型號		
	A	B	C	Standard Type 標準型	2-C Type 2倉型	3-C Type 3倉型
225 x 25	225	25	257	<b>UF2525</b>	<b>UFD2525</b>	<b>UFT2525</b>
225 x 32	225	32	257	<b>UF2532</b>	<b>UFD2532</b>	<b>UFT2532</b>
300 x 25	300	25	332	<b>UF3025</b>	<b>UFD3025</b>	<b>UFT3025</b>
300 x 32	300	32	332	<b>UF3032</b>	<b>UFD3032</b>	<b>UFT3032</b>

### Bend 槽曲



Flat elbow 平面曲

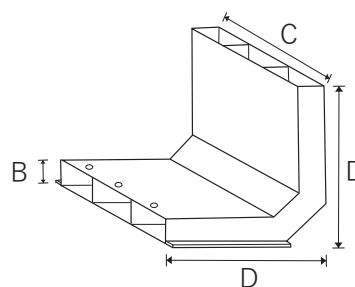

Vertical elbow 垂直曲

Underfloor Trunking Size 藏地槽尺寸	Dimension 尺寸 (mm)				Model Number 型號	
	A	B	C	D	Flat Elbow 平面曲	Vertical Elbow 垂直曲
225 x 25	300	25	225	300	<b>UBH2525</b>	<b>UBV2525</b>
225 x 32	300	32	225	300	<b>UBH2532</b>	<b>UBV2532</b>
300 x 25	375	25	300	375	<b>UBH3025</b>	<b>UBV3025</b>
300 x 32	375	32	300	375	<b>UBH3032</b>	<b>UBV3032</b>

Other sizes can be custom made  
其他尺寸可按客戶要求生產

## Underfloor Service box (New Model) 藏地插座箱 (新款)



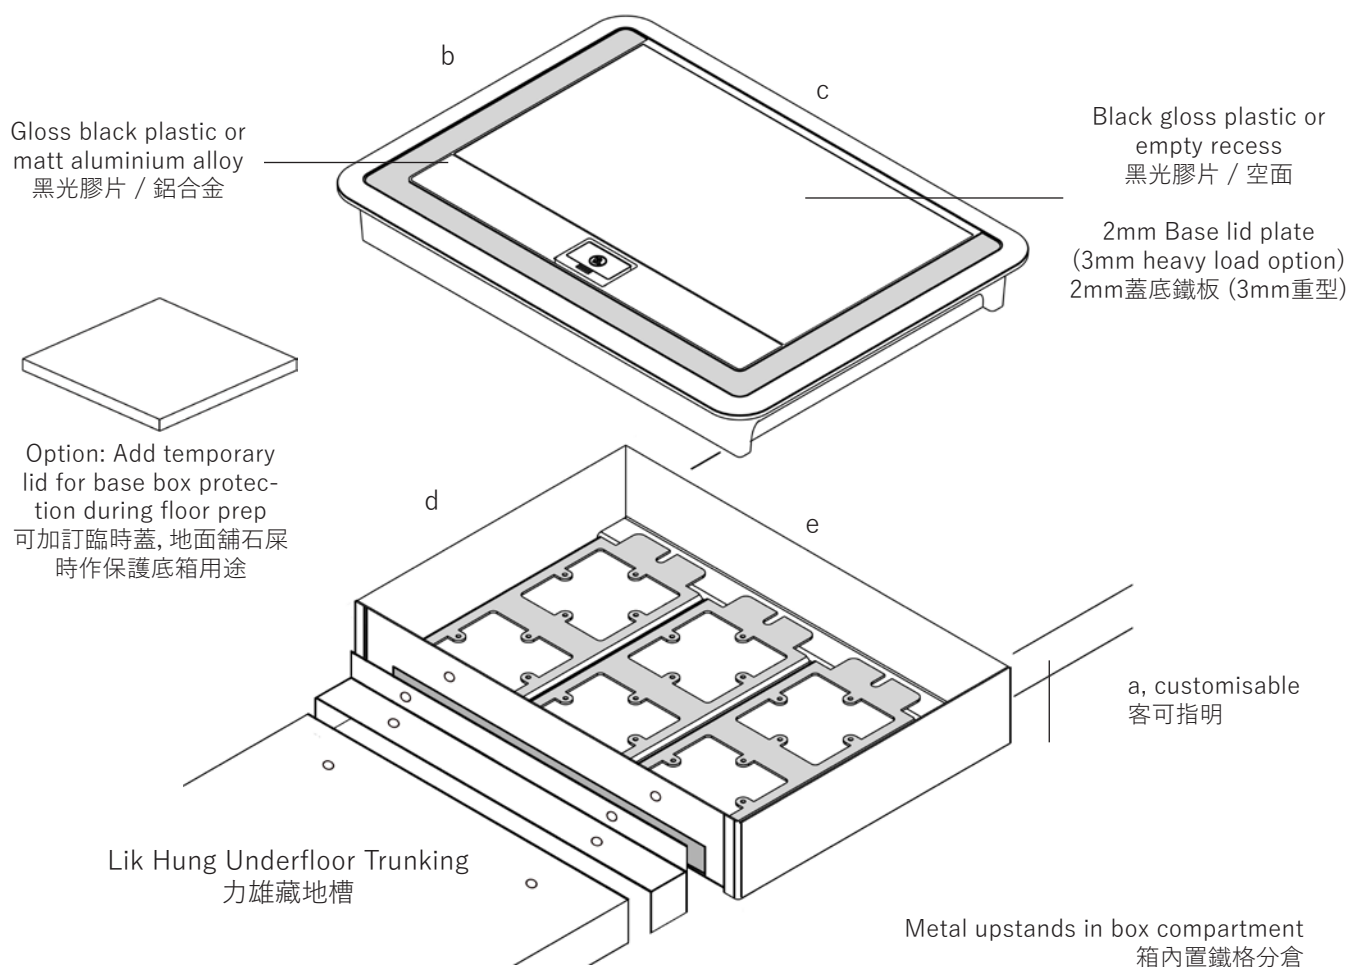



Plate holes customisable (pg 38)  
蘇位佈置/孔款可按 客戶要求 (pg 38)



LHFB2020U



LHFB2525U

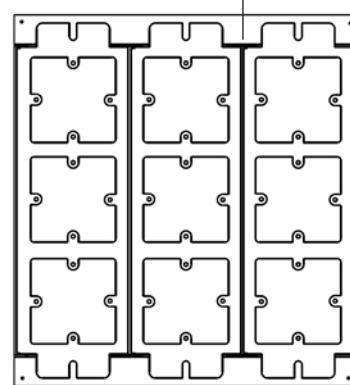



LHFB3030U

Metal upstands in box compartment  
箱內置鐵格分倉


Model Number 型號	Socket number 可配蘇位	Standard model dimensions 標準款式尺寸 (mm)						13a socket plate # 蘇片 #	Use with number of trunking compartment 配槽格數量	Typically for underfloor trunkings of widths 通常配用槽闊 (mm)	Main panel options 主面選擇	Handle Panel options 手抽旁片選擇
		a	b	c	d	e	Lid plate thickness 蓋底鐵板厚					
LHFB2020U	4	>70	263	263	236	236	2	2	1/2/3	<230	Empty (standard) 空 (標準)	Aluminium alloy (standard) 鋁合金 (標準)
LHFB2525U	6	>70	263	360	236	337	2	3	1/2/3	<320		
LHFB3030U	9	>70	353	360	328	338	2	3	1/2/3	<320	Black plastic 黑膠	Black plastic 黑膠




## Underfloor Junction box (New Model) 藏地槽箱 (新款)

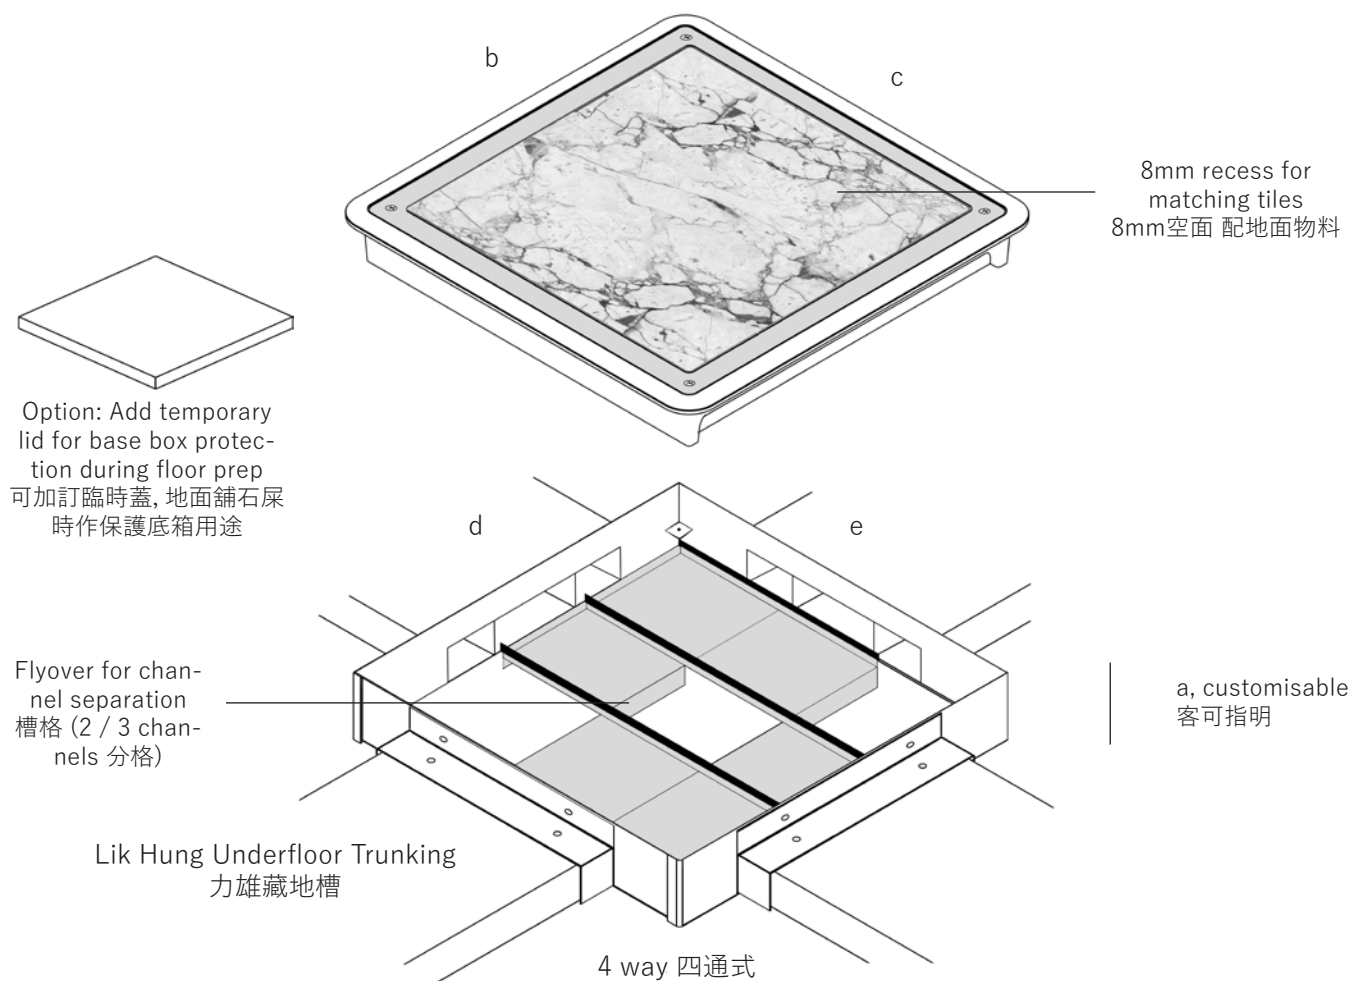


Terminal 終尾式



Through 直通式



Elbow 轉角式




Tee 三通式

Model Number 型號	Standard model dimensions 標準款式尺寸 (mm)					Use with number of trunking compartment 配槽格數量	Typically for underfloor trunkings of widths 通常配用槽闊 (mm)
	a	b	c	d	e		
<b>LHJB2020U</b>	>70	263	263	237	237	1 / 2 / 3	< 230
<b>LHJB3030U</b>	>70	354	361	328	337	1 / 2 / 3	< 320


# Underfloor Service/Junction box (Previous Model) 藏地插座箱/槽箱 (舊款)

## Underfloor Service box (Previous Model) 藏地插座箱 (舊款)

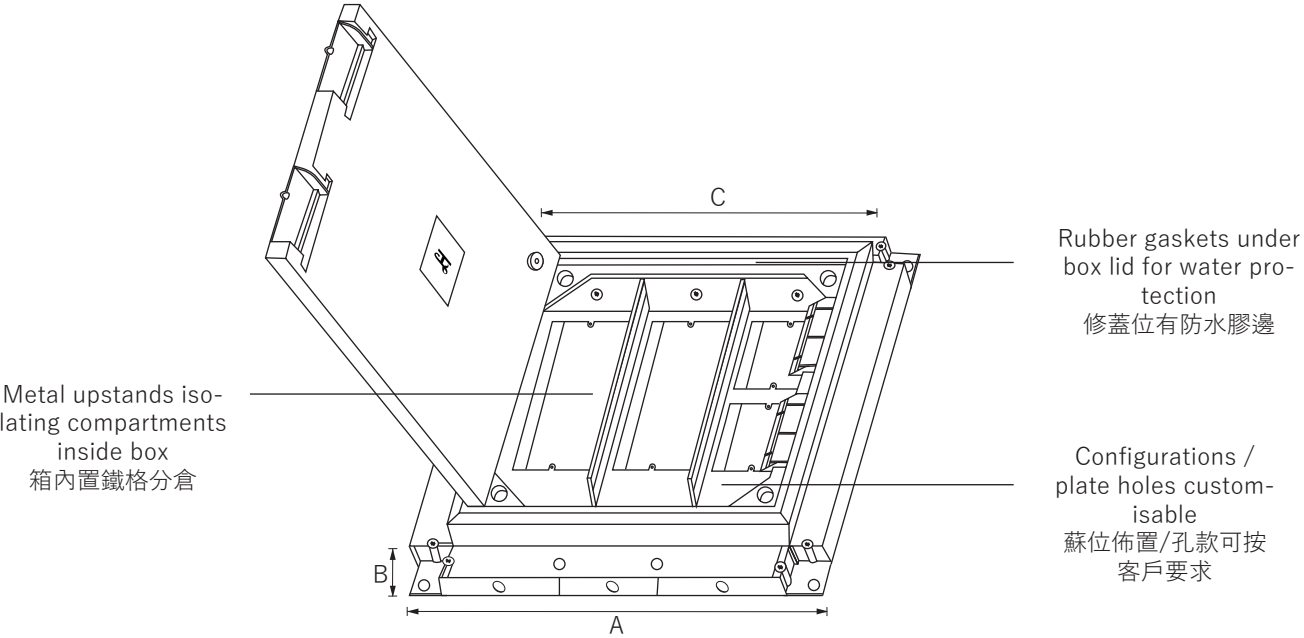

Underfloor Trunking Size 藏地槽尺寸	Socket number 可配蘇位	Dimension 尺寸 (mm)			Model Number 型號
		A	B	C	
225 x 25	6	320	72	280	<b>SBX2525</b>
225 x 32	6	320	79	280	<b>SBX2532</b>
300 x 25	9	395	72	355	<b>SBX3025</b>
300 x 32	9	395	79	355	<b>SBX3032</b>

## Underfloor Junction box (Previous Model) 藏地槽箱 (舊款)

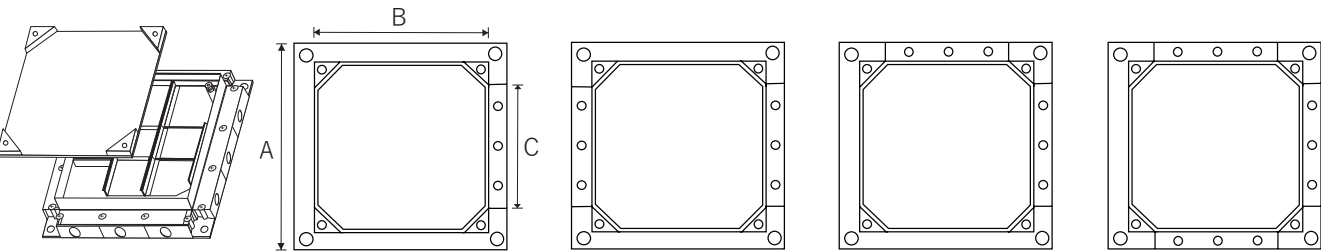

Underfloor Trunking Size 藏地槽尺寸	Dimension 尺寸 (mm)			Model Number 型號				
	A	B	C	4-way 4通式	Terminal 終尾式	Through 直通式	Elbow 轉角式	Tee 3通式
225 x 25	320	280	230	<b>4JB2525</b>	<b>SJB2525</b>	<b>TJB2525</b>	<b>LJB2525</b>	<b>3JB2525</b>
225 x 32	320	280	230	<b>4JB2532</b>	<b>SJB2532</b>	<b>TJB2532</b>	<b>LJB2532</b>	<b>3JB2532</b>
300 x 25	395	355	305	<b>4JB3025</b>	<b>SJB3025</b>	<b>TJB3025</b>	<b>LJB3025</b>	<b>3JB3025</b>
300 x 32	395	355	305	<b>4JB3032</b>	<b>SJB3032</b>	<b>TJB3032</b>	<b>LJB3032</b>	<b>3JB3032</b>

## Flush floor trunking 平地線槽

---

### STANDARDS

BS 4678 Part 2 Class 2 & 3 Corrosion Protection, BS1449, IEC 61084-1, BSEN 10139, EN 10143, BSEN 10149

### 規格標準

BS 4678 Part 2 Class 2 & 3 抗蝕保護, BS1449, IEC 61084-1, BSEN 10139, EN 10143, BSEN 10149

### TRUNKING COVER TYPE

Screw fix, with gasket between trunking body and cover. Cover can be made from 3mm thick galvanised steel or hot dip galvanised chequered steel sheet

### 槽蓋款式

螺絲蓋, 線槽配備防水膠邊, 槽蓋可選用3mm厚鍍鋅鋼板 或 熱浸鋅花鐵板

### MATERIAL

Galvanised Steel Sheet  
Mild Steel  
Stainless Steel Sheet SS304 (S), SS316 (X)

### 原料

鍍鋅鋼板  
鋼板  
不銹鋼板SS304 (S), SS316 (X)

### LENGTH

Standard length of 2.44m,  
Other lengths available on request

### 長度

標準2.44m,  
其他長度可按照客需要

### THICKNESS

Comply to HK government projects  
Other thicknesses can be made  
(0.9mm -2.0mm )

### 厚度

符合香港政府相關部門要求  
其他厚度由0.9mm -2.0mm 可按要求生產

### FINISHES

Hot Dip Galvanized to BS729, ISO1460, 1461 (H)  
Coloured Epoxy Powder Coating / High Grade Outdoor Powder (P)

### 表面處理

熱浸鋅符合標準BS729, ISO1460, 1461 (H)  
顏色聚脂油粉 / 高級戶外粉 (P)

### SEPARATE COMPARTMENTS


2 compartment (D), or multi compartment (T)  
as requested

### 槽內間格

可按照客人的要求製成二倉式(D), 多倉式(T)

Fittings and accessories meet the same standard and specifications as the trunkings  
線槽配件的規格及標準完全遵照及配合電線槽而製成

# Flush floor trunking 平地線槽

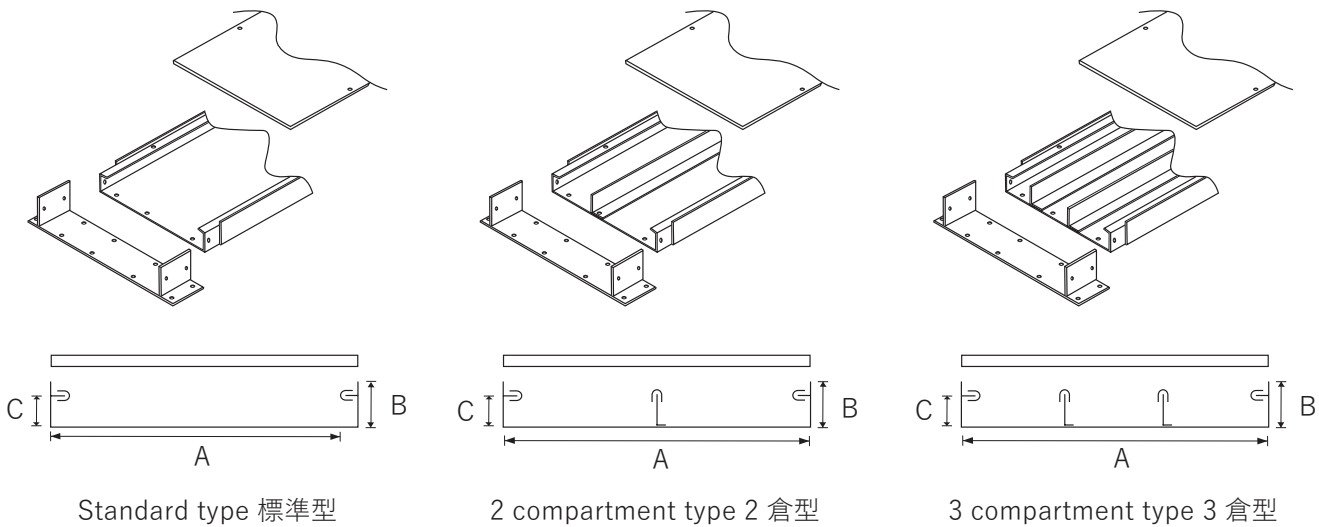


Flushfloor Trunking Size 平地槽尺寸	Dimension 尺寸 (mm)			Model Number 型號		
	A	B	C	Standard Type 標準型	2-C Type 2倉型	3-C Type 3倉型
150 x 50	150	50	47	<b>FF5015</b>	<b>FFD5015</b>	<b>FFT5015</b>
200 x 50	200	50	47	<b>FF5020</b>	<b>FFD5020</b>	<b>FFT5020</b>
250 x 50	250	50	47	<b>FF5025</b>	<b>FFD5025</b>	<b>FFT5025</b>
300 x 50	300	50	47	<b>FF5030</b>	<b>FFD5030</b>	<b>FFT5030</b>
150 x 75	150	75	72	<b>FF7515</b>	<b>FFD7515</b>	<b>FFT7515</b>
200 x 75	200	75	72	<b>FF7520</b>	<b>FFD7520</b>	<b>FFT7520</b>
250 x 75	250	75	72	<b>FF7525</b>	<b>FFD7525</b>	<b>FFT7525</b>
300 x 75	300	75	72	<b>FF7530</b>	<b>FFD7530</b>	<b>FFT7530</b>


Other sizes can be custom made  
其他尺寸可按客戶要求生產

## Flush floor trunking Bend and Box 平地線槽曲及箱

### Flush floor trunking Bend 平地線槽曲




Flat elbow 平面曲




Vertical elbow 垂直曲

Flushfloor Trunking Size 平地槽尺寸	Dimension 尺寸 (mm)				Model Number 型號	
	A	B	C	D	Flat Elbow 平面曲	Vertical Elbow 垂直曲
150 x 50	275	50	150	275	<b>FBH5015</b>	<b>FBV5015</b>
200 x 50	325	50	200	325	<b>FBH5020</b>	<b>FBV5020</b>
250 x 50	375	50	250	375	<b>FBH5025</b>	<b>FBV5025</b>
300 x 50	425	50	300	425	<b>FBH5030</b>	<b>FBV5030</b>
150 x 75	275	75	150	275	<b>FBH7515</b>	<b>FBV7515</b>
200 x 75	325	75	200	325	<b>FBH7520</b>	<b>FBV7520</b>
250 x 75	375	75	250	375	<b>FBH7525</b>	<b>FBV7525</b>
300 x 75	425	75	300	425	<b>FBH7530</b>	<b>FBV7530</b>


### Flush floor Junction Box 平地線槽箱




4 way 四通式




Terminal 終尾式



Through 直通式



Elbow 轉角式



Tee 三通式

Flushfloor Trunking Size 平地槽尺寸	Dimension 尺寸 (mm)			Model Number 型號				
	A	B	C	4-way 4通式	Terminal 終尾式	Through 直通式	Elbow 轉角式	Tee 3通式
150 x 50	250	200	155	<b>4FB5015</b>	<b>SFB5015</b>	<b>TFB5015</b>	<b>LFB5015</b>	<b>3FB5015</b>
200 x 50	300	250	205	<b>4FB5020</b>	<b>SFB5020</b>	<b>TFB5020</b>	<b>LFB5020</b>	<b>3FB5020</b>
250 x 50	350	300	255	<b>4FB5025</b>	<b>SFB5025</b>	<b>TFB5025</b>	<b>LFB5025</b>	<b>3FB5025</b>
300 x 50	400	350	305	<b>4FB5030</b>	<b>SFB5030</b>	<b>TFB5030</b>	<b>LFB5030</b>	<b>3FB5030</b>
150 x 75	250	200	155	<b>4FB7515</b>	<b>SFB7515</b>	<b>TFB7515</b>	<b>LFB7515</b>	<b>3FB7515</b>
200 x 75	300	250	205	<b>4FB7520</b>	<b>SFB7520</b>	<b>TFB7520</b>	<b>LFB7520</b>	<b>3FB7520</b>
250 x 75	350	300	255	<b>4FB7525</b>	<b>SFB7525</b>	<b>TFB7525</b>	<b>LFB7525</b>	<b>3FB7525</b>
300 x 75	400	350	305	<b>4FB7530</b>	<b>SFB7530</b>	<b>TFB7530</b>	<b>LFB7530</b>	<b>3FB7530</b>



## Cable Capacity 電線容量


Trunking size is determined by firstly multiplying the number of each conductor by the appropriate corresponding factor shown in table A. The total amount is compared with the factor shown in chart B. This second factor should either equal or exceed the total first conductor factor amount used.

根據安全準則,電線槽內的電線容量,應以下列兩表作為參考,即電線槽的數值應相等或高於所藏電線的數值總和。

Table A - Factor for Cable 電線的數值表

Type of conductor 電線種類	Conductor Cross - sectional area 電線直徑 (mm)	Factor 數值
Solid 單芯電線	1.5	7.1
	2.5	10.2
Stranded 多芯電線	1.5	8.1
	2.5	11.4
	4	15.2
	6	22.9
	10	36.3

Chart B - Trunking Dimension 電線槽尺寸

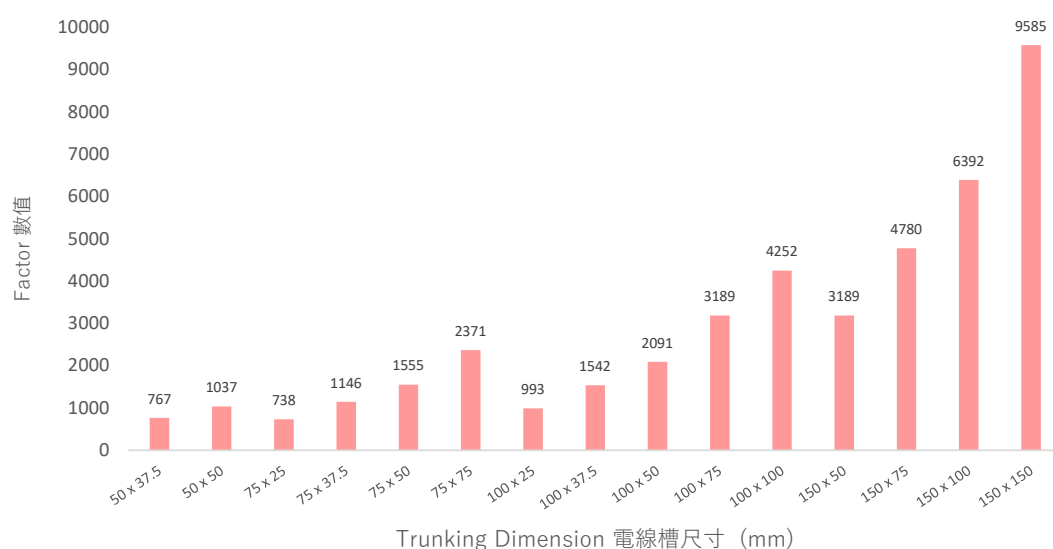

Data is for reference and should be used only as a guide  
數據只作參考



**Hong Kong - Office + Warehouse 1**

G/F, Unit B, Mai Luen Industrial Building,  
23 - 31 Kung Yip St, Kwai Chung  
Tel: + 852 2743 7827  
Fax: +852 2785 7655  
@: sale@likhung.com.hk

**Hong Kong - Warehouse 2**

3C, Mai Luen Industrial Building,  
23 - 31 Kung Yip St, Kwai Chung

**Mainland - Factory**

Wei Xing Road, Yantian District,  
Fenggang Town, China

**香港 - 營業部 + 主倉**

葵涌 工業街 23-31號  
美聯工業大廈 B座地下  
電話: +852 2743 7827  
傳真: +852 2785 7655  
@: sale@likhung.com.hk

**香港 - 分倉**

葵涌 工業街 23-31號  
美聯工業大廈 3C

**中國大陸 - 工廠**

東莞力雄五金電器塑膠製品有限公司  
鳳崗鎮 雁田管理區 圍興路



[www.likhung.hk](http://www.likhung.hk)