




**LIK HUNG**

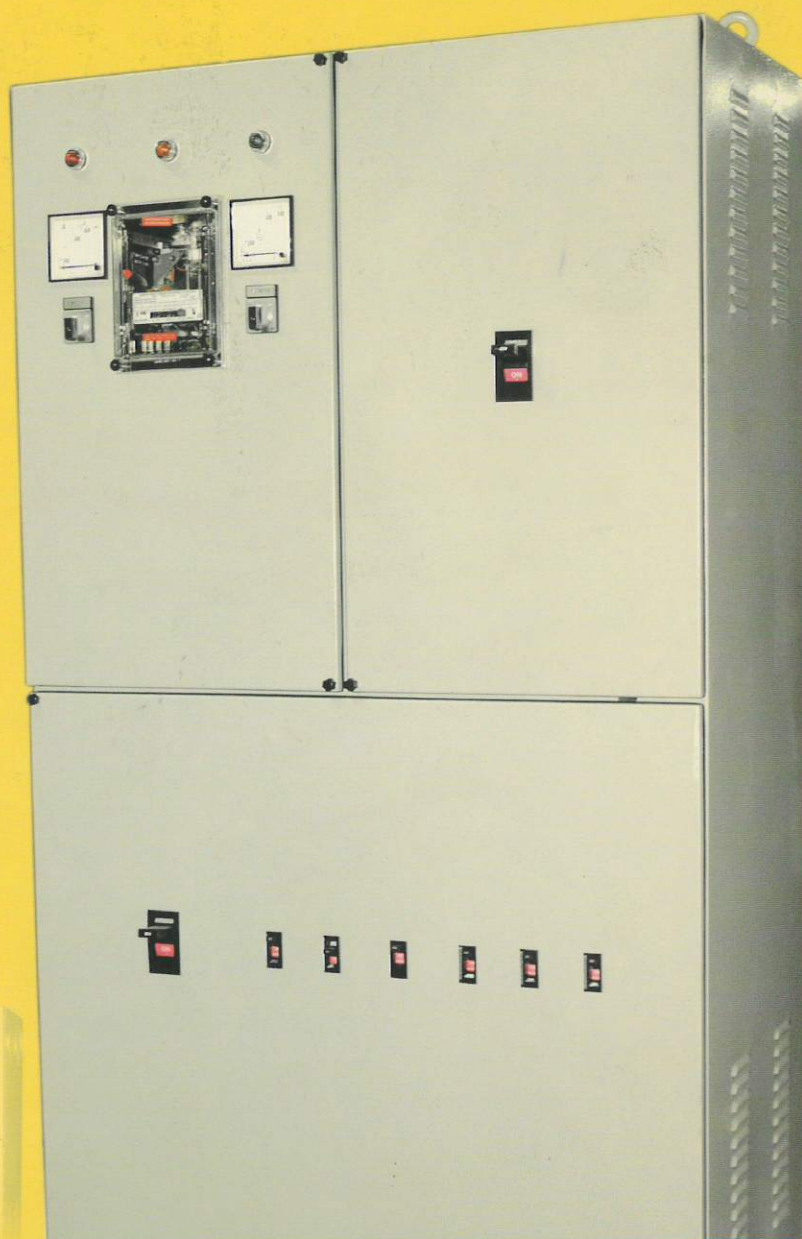

**東莞力雄五金電器塑膠制品有限公司**

**DONG GUAN LIK HUNG METAL ELECTRON & PLASTIC PRODUCTS CO., LTD.**



公司簡介

東莞力雄五金電器塑膠製品有限公司是中外合資企業，本公司集實業、技術、開發於一體，擁有廠房面積一萬平方米，擁有先進的生產設備(全自動電腦數控沖孔機，電腦數控摺邊機、精密剪角機等)，是專業生產照明/動力配電箱、配電櫃、電控櫃(臺)、電訊機箱、電容補償櫃、防水箱、電線槽、電纜托盤及母線橋架，並代理經銷各國名廠低壓電器元件。

LH牌電線槽、配電箱等配電設備系列廣泛用於房地產建築，工廠、住宅、酒店等企業的照明、動力控制，機床傳動以及供電、供水、消防工程的控制系統。電訊機箱(如光纖綫梯架、電視櫃、電池櫃等)主要適用於通訊方面，憑着完善的質量保證(檢測)體系、可靠的技術服務，產品行銷香港(主銷)、東南亞、歐美國家以及國內各地，本公司更於2001年通過ISO國際認證，升級為：ISO9001:2000版。感謝閣下對LH產品的信任與支持。我們將不斷開發和引進新產品新技術，不斷滿足閣下對本公司產品的各種要求。

DONGGUAN LIK HUNG METAL ELECTRON AND PLASTIC PRODUCTS CO., LTD. is a joint venture enterprise which focuses on technical skill. The company, having a large factory of over 10,000 square metres and advance production facility (Hydraulic CNC Turret Punch Press Machine, CNC Synchronize Hydraulic Press Brakes, Variable Angle Multi Notcher) produce professionally lighting/power supply switchboard, control panel, cable box, capacitor bank panel, waterproof enclosures, cable trunking, cable tray and cable ladder. Also it is responsible for marketing low voltage electrical component to different countries.

LH brand cable trunkings and others such as cable boxes are widely used in construction, industry, housing and hotel for lighting and dynamic control, supplying electricity and water, engineering on fire service controlling system. Wiring control boxes (fabric cable ladder, television cabinet and electrical cell cabinet) are mainly used in communication purposes. With a thorough quality control (inspection) System, reliable technical services, products are widely sold to Hong Kong, South East Asia, Europe, American countries and cities in the mainland. The company has passed the ISO9001 in 2001. We are grateful for your confidence and support for the LH products. We will continuously develop and input new technical skills to make our products, in order to satisfy your needs.



公司辦公室




公司會議室



# 低壓配電櫃

Low Voltage Power Supply Panel

L.H.  
LIK HUNG

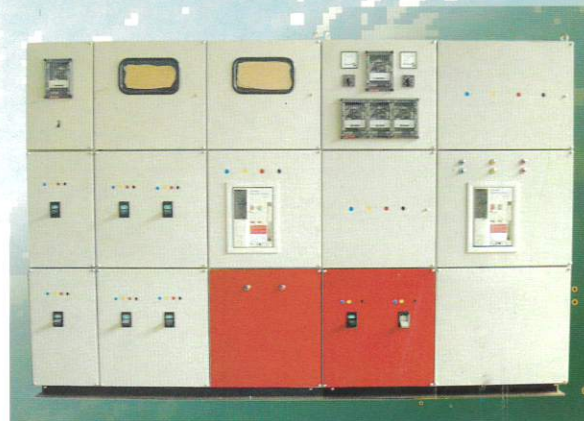




# 工廠車間總配電櫃(加裝自動補償器)

Main Power Supply Panel(With Capacitor Bank)

L.H.  
LIK HUNG




工廠車間總配電櫃（加裝自動補償器）  
Main Power Supply Panel(With Capacitor Bank)

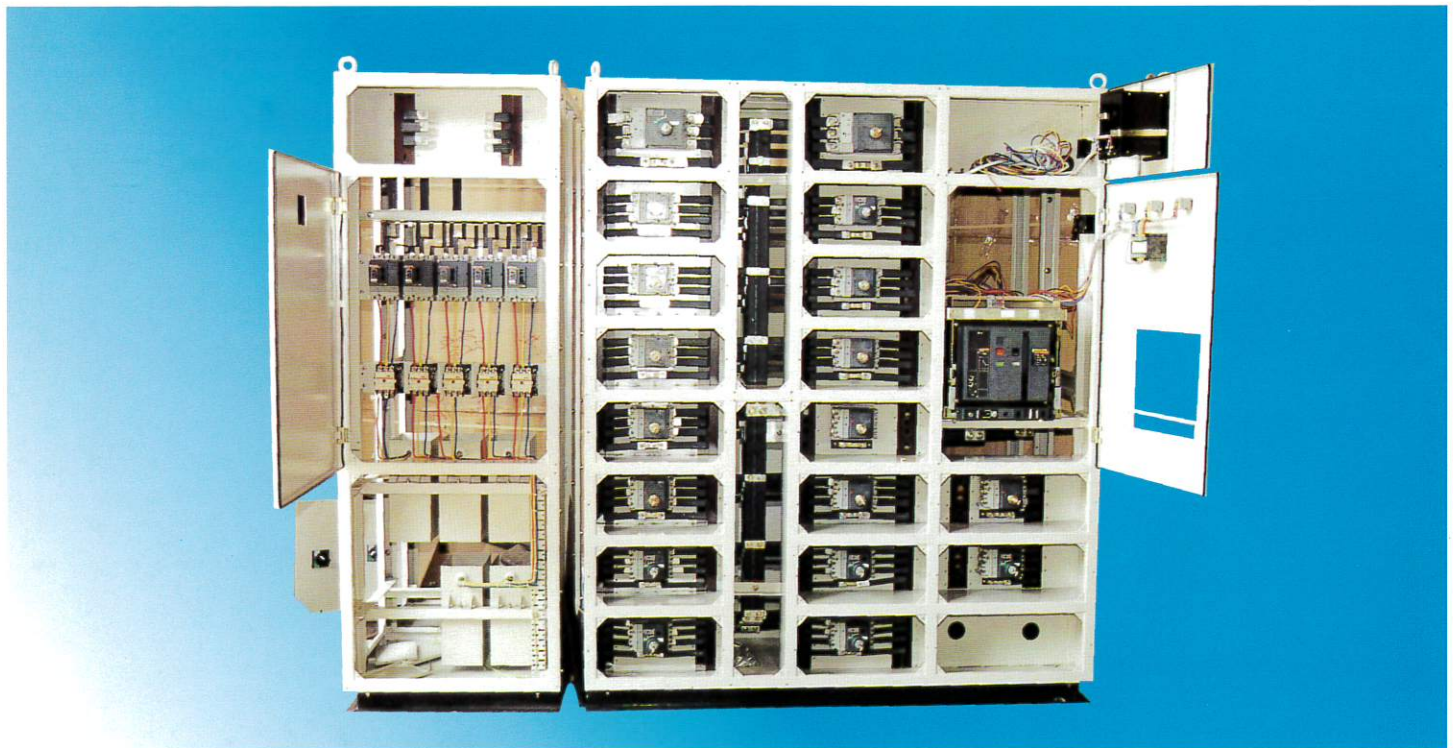

此櫃外表美觀大方，使用安全方便（加裝水氣表），總制與分制連接採用紅銅排（經電錫處理），銅排套用絕緣伸縮膠，使電流過流更穩定，使用更安全。另加裝電容自動補償，對照明、機械、器材更具保護作用。


This panel is attractive, with a save and convenient usage (Earth-Fault Relay). Main swith is connected to branch switches with galvanized copper bar. Copper bar is covered with isolate plastic tube . This will make the current more stable and save. After adding capacitors, the facilities for lighting and mechanics will be more protected.



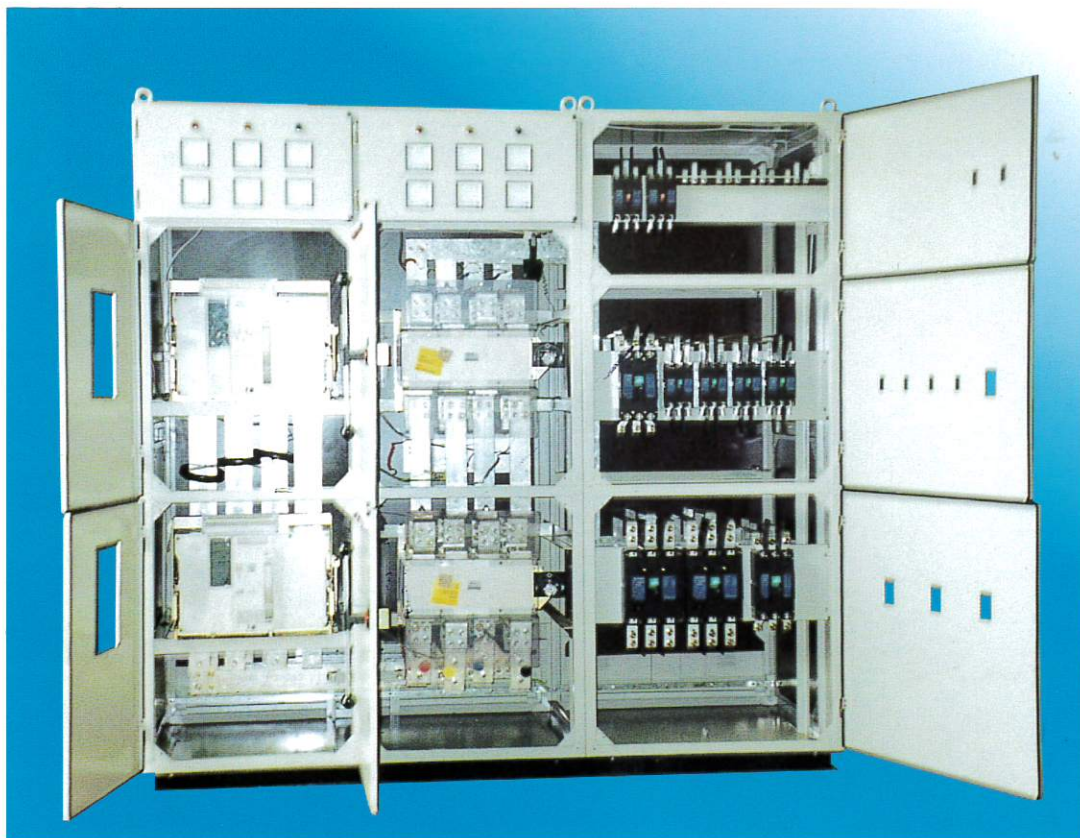


全部開關制之間選用銅排（日本進口銅）連接，使電流過流更平穩。

All switches are connected with import copper bar, which will make circuit more stable.

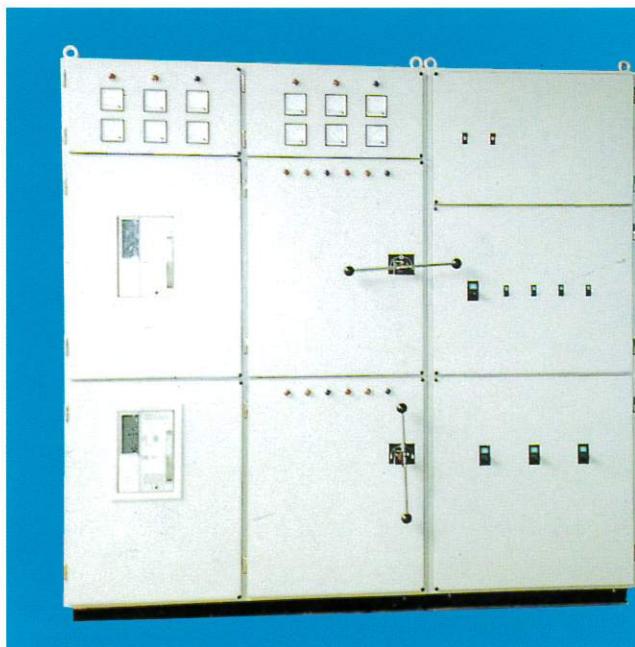

工廠電房2500A配電櫃，市電、發電轉換。

A factory-used 2500Amps electrical supply panel, with city power / self-generated current manual-changed switch.

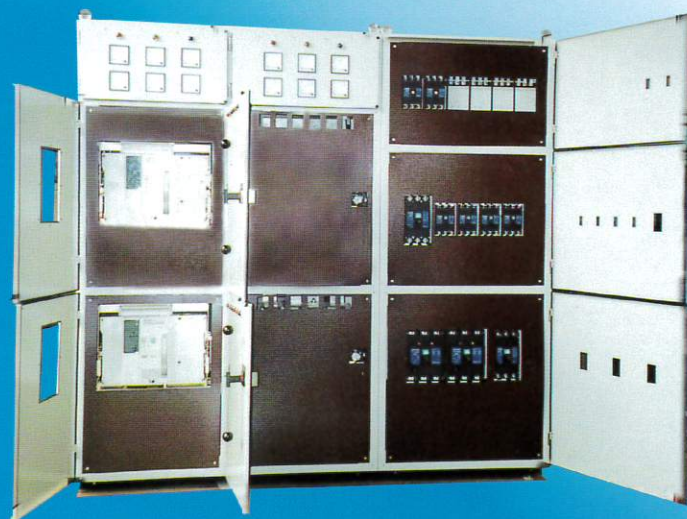

選用厚絕緣電木板封面，使用更安全、保險。

Thick insulated laminated sheets are used inside the panel, making it more safe and insured.




# 常用配電櫃型號 / 規格一覽表

Standard Power Supply Panel/Specification

**L.H.**  
**LIK HUNG**



	型 號 Model	總 制 A 數 Amps of Main Current	可 裝 分 制 NO of Branch Switches	外型尺寸 (W×H×D) Size
1	LH0400A	300A 400A	100A×3個	1117×1524×600
			60A×3個	
			30A×3個	
	LH0600A	500A 600A	150A×3個	
			100A×3個	
			60A×3個	
3	LH0800A	800A	300A×3個	1220×1830×760
			200A×3個	
			100A×3個	
	LH1000A	1000A	400A×3個	
			200A×4個	
			100A×4個	
5	LH1200A	1200A	500A×2個	1320×1980×950
			400A×2個	
			200A×3個	
			100A×3個	

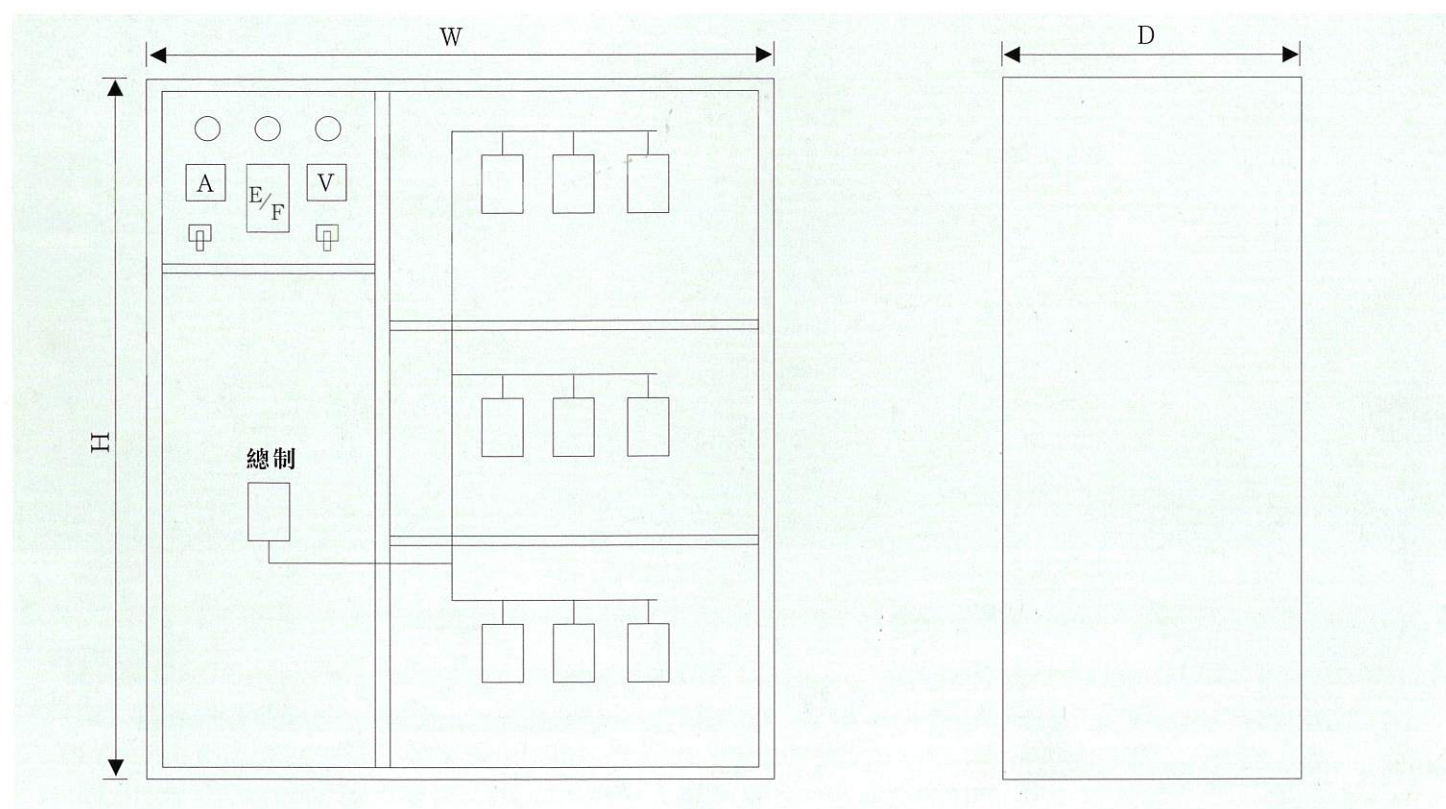



# 并車櫃 轉換制櫃

Panels For Join-Generators Power Supply and Change-Over Switchs

L.H.  
LIK HUNG



## 并車櫃

Panels for power supply from several generators join together



## 轉換制櫃


Panels for change-over switchs





選用電木封面

Cover with isolated laminated sheet

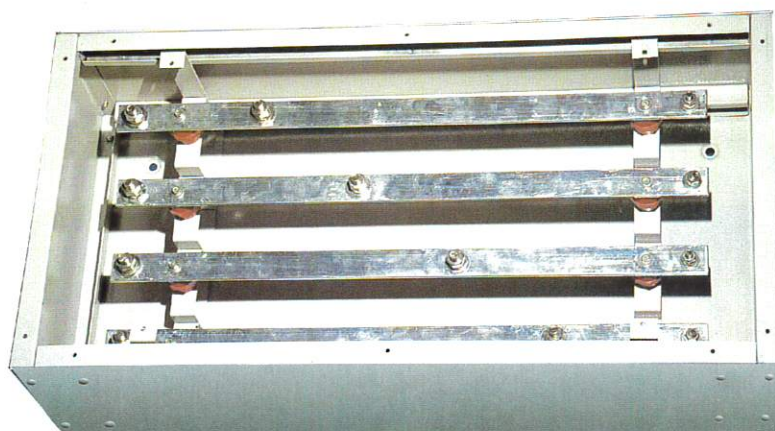

採用梯級式排巴，接綫方便安全

Bus-bar arranged in stairs type, easy for connection and safety

### 常用巴箱型號、規格表

型 號 Model	可過載電流 Amps of Main Current	規格WxHxD Size
BX100200	100A – 200A	400x400x200 600x400x200 900x400x200
BX300400	300A – 400A	400x500x250 600x500x250 900x500x250
BX500600	500A – 600A	400x600x300 600x600x300 900x600x300
BX8001000	800A – 1000A	400x700x350 600x700x350 900x700x350



# 掛牆式低壓配電箱

Wall-Mounted Low Voltage Power Supply Panel

 **L.H.**  
**LIK HUNG**



**V箱系列**  
**V-series**



**K箱系列**  
**K-series**



**T箱系列**  
**T-series**



# 常用KTV箱型號 / 規格表


Specification For K. T. V. Panel

**L.H.**  
LIK HUNG



	編號 Model	分巴合計 No of ways	可配蘇位 No of sockets/ switchs	X (MM)	Y (MM)
	K9	9位	4個	650	625
	K13	13位	4個	650	740
	K17	17位	4個	650	840
	K21	21位	4個	650	940
	V9	9位	2個	965	400
	V13	13位	4個	965	500
	V17	17位	6個	965	600
	V21	21位	8個	965	710
	T13	13位	12個	890	710
	T17	17位	14個	890	810
	T21	21位	16個	890	900
	T25	25位	18個	890	1000



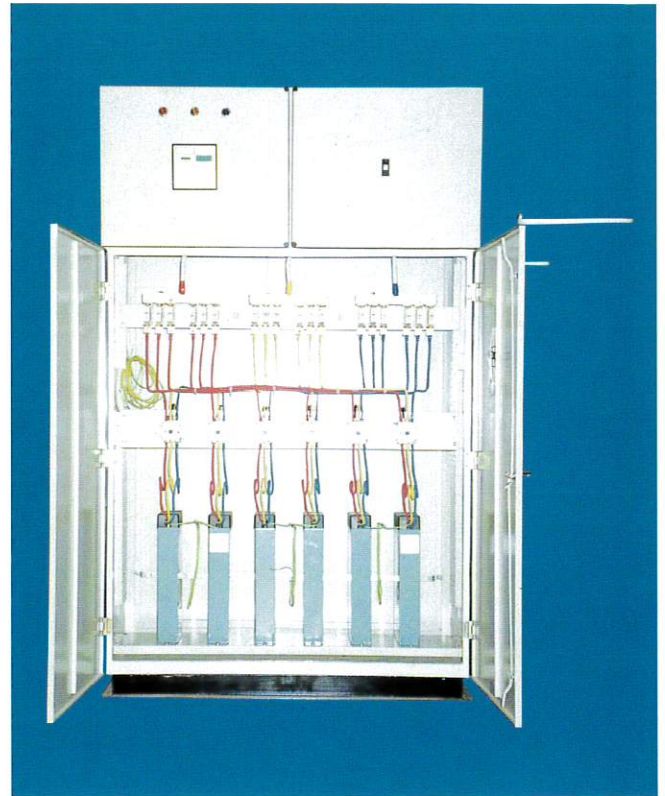

## 全自動補償櫃功能

所有電容能抵禦以下情況：

- 1、10%超額電壓
- 2、30%超載電流
- 3、35%超出額定值輸出

Function:

All capacitor can resist the following:

1. 10% over voltage
2. 30% over current
3. 35% over rated output

當有故障時，電容器自動切斷電源，及自動放電。


During disorder, the capacitor will cut the electrical supply and discharge AUTOMATICALLY.

多級數調節器有以下設備：


- 1、電源指示燈；
- 2、功率因素顯示；
- 3、手動／自動控制及指示燈；
- 4、延時裝置；
- 5、級數接連指示燈。

RPCR has the following function:


1. current indicator
2. power factor indicator
3. manual/automatic control and indicator
4. time relay
5. stage indicator

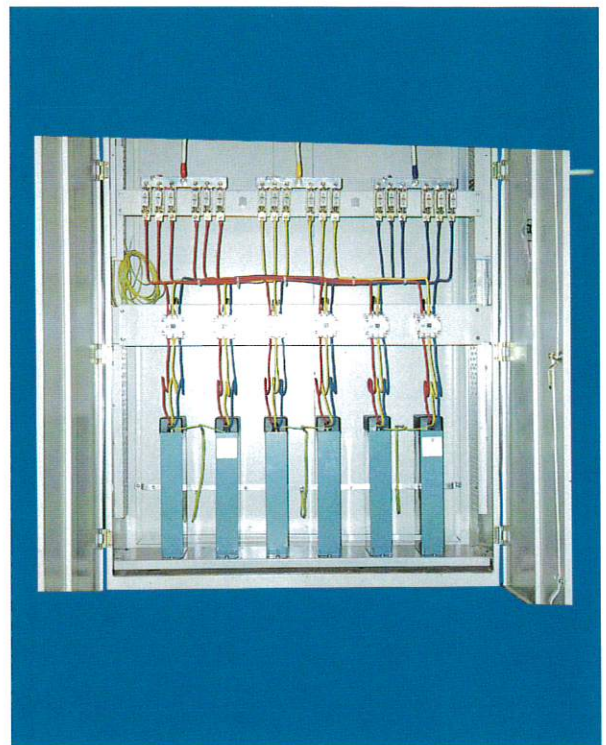



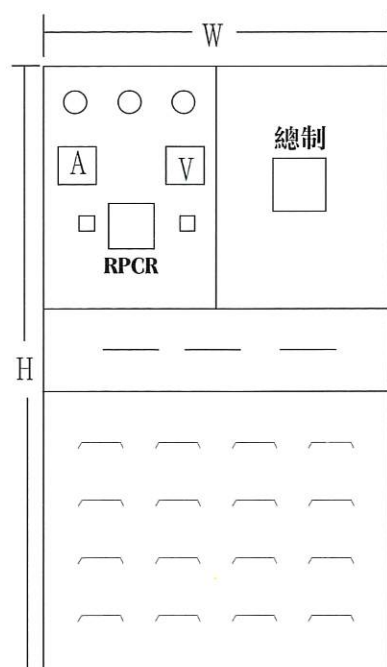

平面圖  
Front View

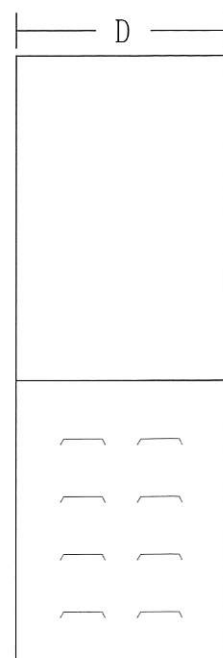


側面圖  
Side View

	型號 Model	補償數值 kvar	級數 Stage	櫃外型尺寸 Size (W X H X D)
1	T060	60kvar	6	1000x1730x600
2	T090	90kvar	6	1000x1730x600
3	T120	120kvar	6	1000x1730x600
4	T180	180kvar	6	1000x1730x600
5	T240	240kvar	12	1220x2185x900
6	T360	360kvar	12	1220x2185x900
7	T480	480kvar	12	1220x2185x1065
8	T600	600kvar	12	1220x2185x1065

為提高整個用戶所有設備的功率因數，其中一個有效的方法是在總電源處加上適當的電容，而電容必須與設備并聯連接，因為此接法可加強穩定供應用電設備的電壓。

To increase the power factor of all facilities, one of the effective method is to add suitable capacitors connect with the main power supply. The capacitors must connect to the loading facility and make the voltage of the circuit stable.



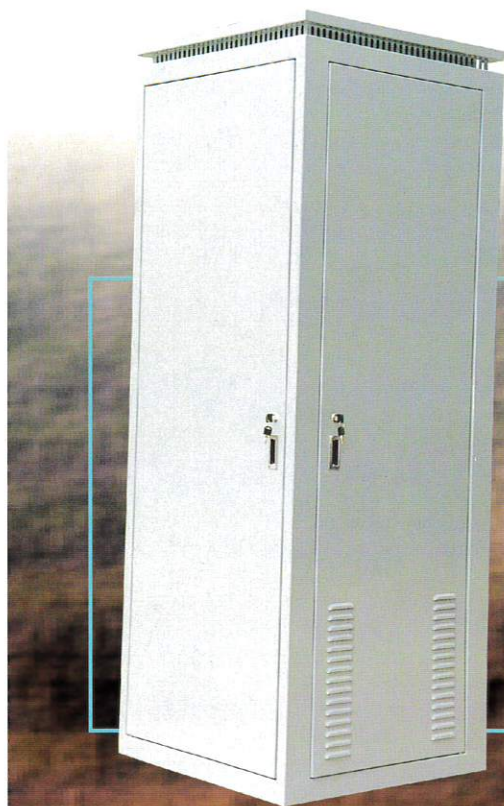

## 材料:

選用優質鋼板，再經靜電噴塗。

**Material:** using high quality steel sheet and epoxy powder coating outside

**主要功能:** 四面生動蓋掩門，配置手挽抽，有鑰匙，通風式頂蓋設計，可配抽拉式內橫板。



**Main functions:** 4 sides with doors, each door is equipped with handle and key lock. Ventilational type top cover, accessory with sliding type decks.



# 鋼質通訊機櫃結構圖 / 規格 / 型號表

Specification And Model For Steel Telecommunication Panel

**L.H.**  
**LIK HUNG**

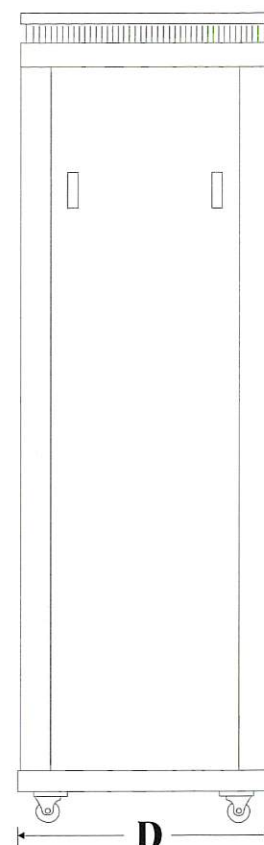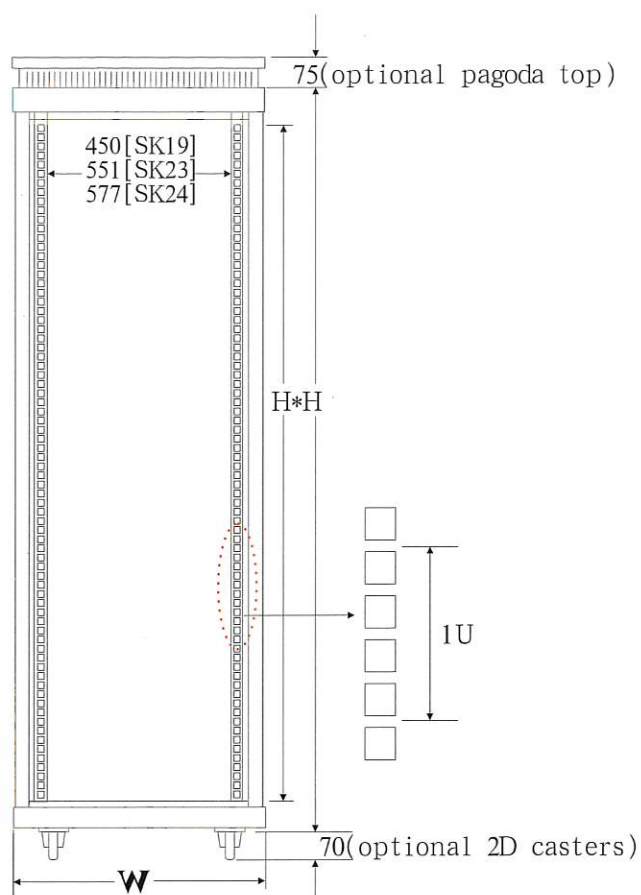

系 列 Series	櫃內尺寸 Panel Width	櫃外尺寸 W(External Width)
Sk19	482.6mm	600mm
Sk23	584.2mm	702mm
Sk24	609.6mm	727mm

櫃內深度 Nominal Depths	外計深度 D (External Depth)	D*	
		Max	Min
600	619mm	482mm	102mm
900	770mm	634mm	102mm

型 號 Model	櫃內高度 H*(Usable Height)	外計高度 H(External Height)
24U	1067mm	1214mm
32u	1422mm	1569mm
36U	1600mm	1747mm
39U	1734mm	1881mm
42U	1867mm	2014mm
45U	2000mm	2147mm



# 露天防風雨電表箱

Outdoor Waterproof Watt-Meters Panel

L.H.  
LIK HUNG





# 露天式避水箱(組合式)

## Outdoor Waterproof Panel(Combinational)


**L.H.**  
**LIK HUNG**



組合式露天用避水箱型號規格一覽表  
Specification of outdoor waterproof panel

	型號 Model	規格HxWxD Size	配腳架 Stand model
1	WP5448	1220x1370x350	L54
2	WP4848	1220x1220x350	L48
3	WP4836	1220x900x300	L36
4	WP3636	900x900x300	L36
5	WP3624	900x600x300	L24
6	WP2424	600x600x300	L24
7	L54腳架	600x1370x350	
8	L48腳架	600x1220x350	
9	L36腳架	600x900x300	
10	L24腳架	600x600x300	

露天用避水箱結構圖  
Structural diagram of outdoor waterproof panel

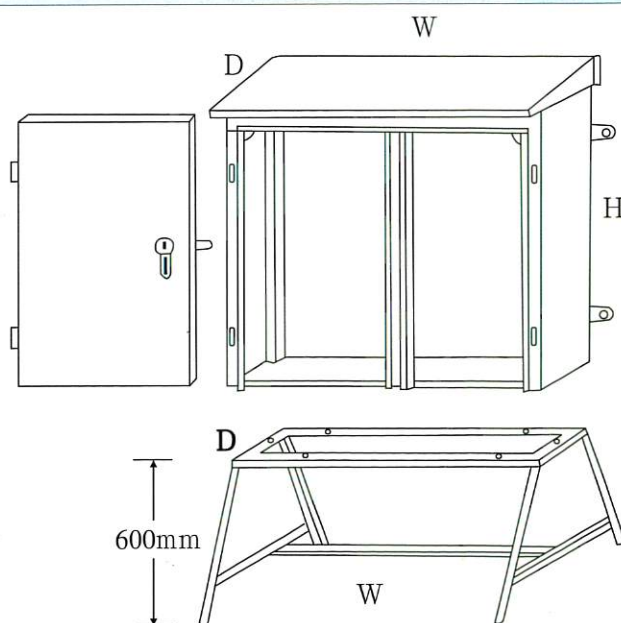






琴式控制臺  
Piano-type control tower

支掌式櫃蓋, 使用方便  
Top cover with supporter, convenient to use

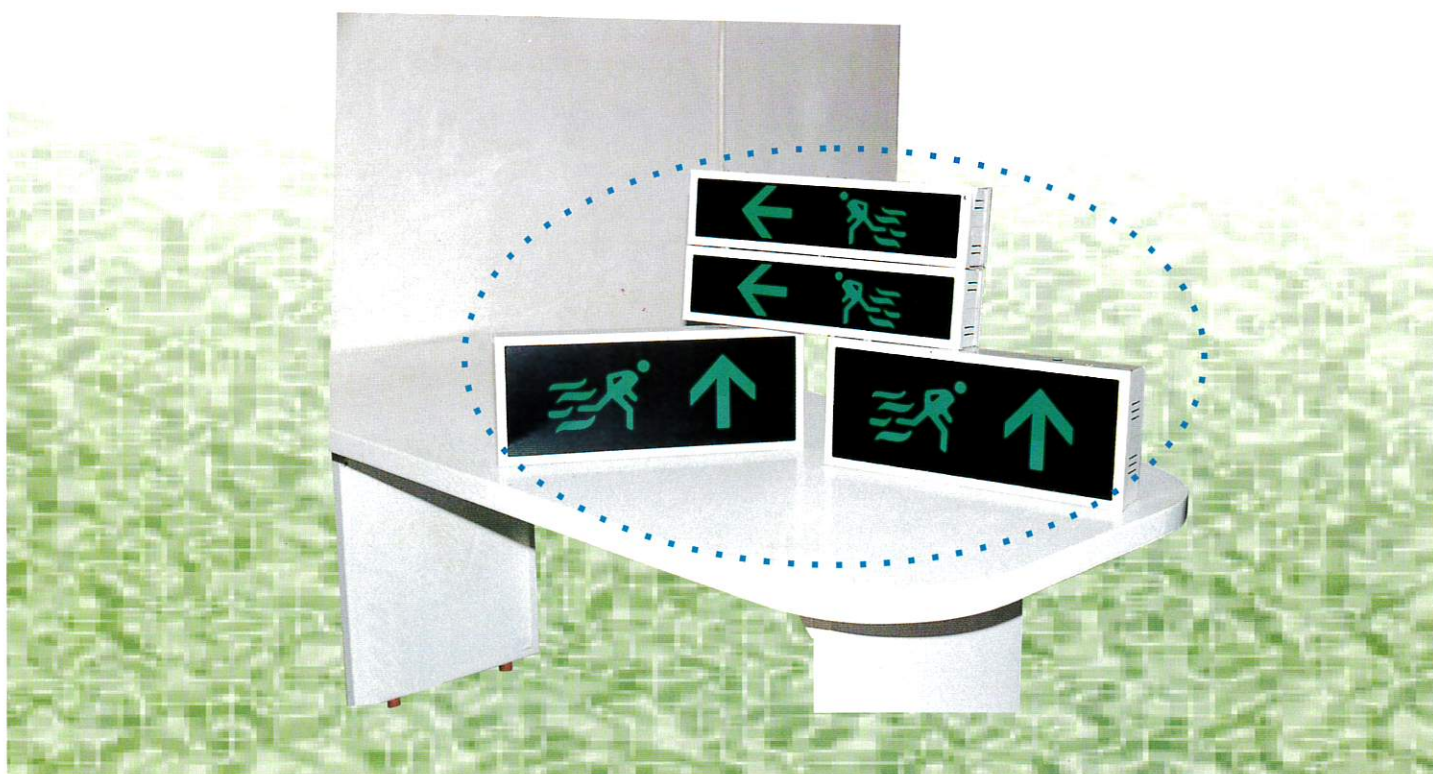

出路燈箱  
Road-sign luminous






材料： 全部選用鋁合金，主要功能特點：四面掩門，每頁門裝有防水膠邊，櫃頂有防水疏氣孔，內置溫控器，能自動降溫，自動抽氣。

Material: produce with aluminium alloy, 4 side with doors, each door is equipped with gasket. Waterproof ventilation hole is found at the top of the cabinet. This cabinet is equipped with a temperature controller to cool down with ventilation automatically.

主要用途： 露天式電訊機櫃。

Main usage: outdoor type telecommunication cable cabinet.



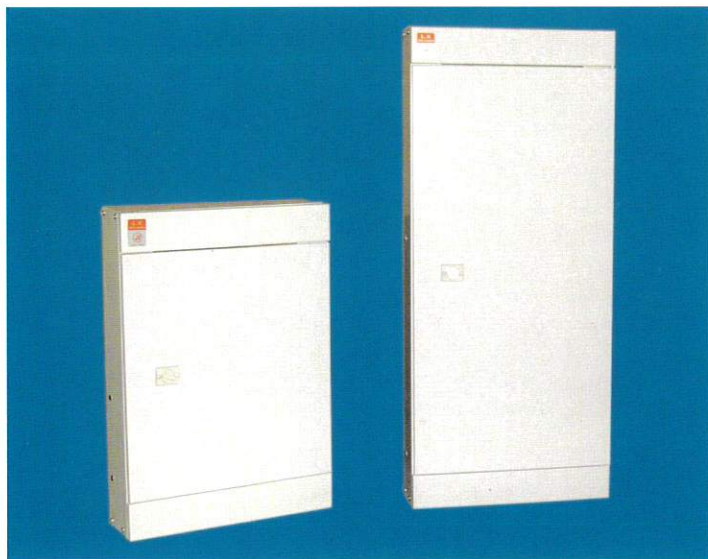

LH 牌排骨箱是我們公司的主要產品，它具有設計合理、安全、外表美觀、方便使用、易裝置。更具有如下特點和功能：

標準規格：

主巴電流：200A

分巴電流：60A

電壓：240 / 415V 50Hz

可裝置：1P 2P 3P MCB

LH distribution board is our company's main product. It has an attractive and safe design with a convenient usage, easy to install. It has the following function:


Standard Specification:

Main current: 200A

Branch Current: 60A


Voltage: 240/415V 50Hz

Suitable Installation: 1p, 2p, 3p MCB

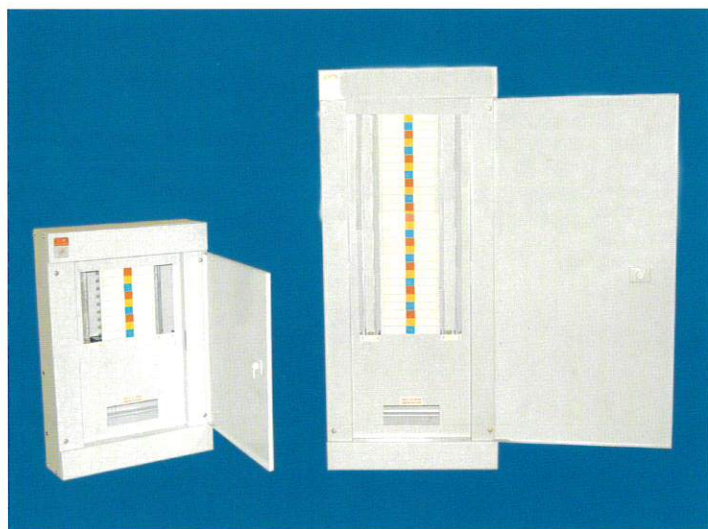


歐式MCB 排骨巴

Rib-shape Busbar Connector for MG, Hager, ABB MCB.

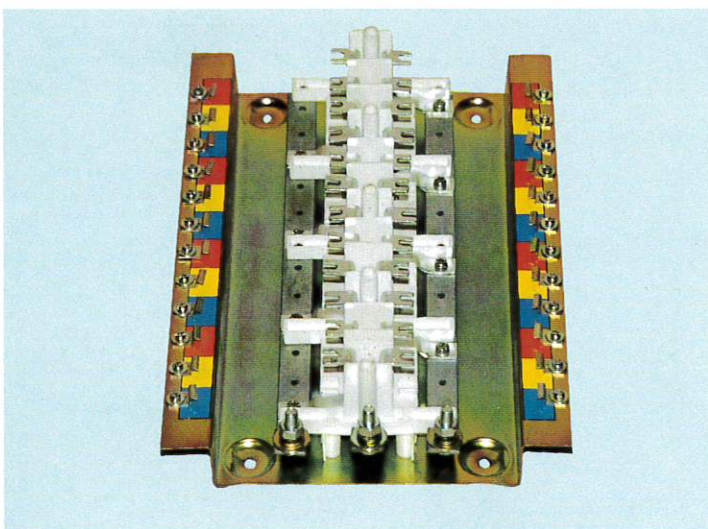

三菱 BH M3 排骨巴

Rib-shape Busbar Connector for BH M3 MCB

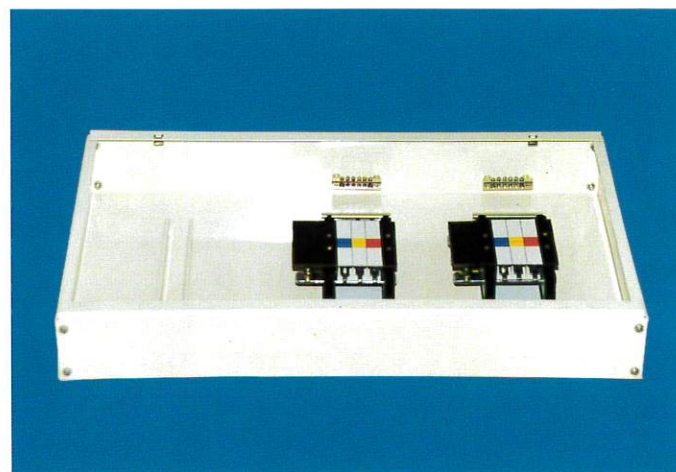



# LH 牌三相四綫排骨箱型號 / 規格一覽表


Model and Specification of LH Distribution Board

**L.H.**  
LIK HUNG



型 號 Model	位 數 No of Ways	規格Size( mm ) 寬(W)x深(D)x高(H)
CSM - 02	2 W / O	380x110x338
CSM - 04	4 W / O	380x110x366
CSM - 06	6 W / O	380x110x418
CSM - 08	8 W / O	380x110x467
CSM - 10	10 W / O	380x110x546
CSM - 12	12 W / O	380x110x586
CSM - 14	14 W / O	380x110x656
CSM - 16	16 W / O	380x110x716
CSM - 18	18 W / O	380x110x766
CSM - 20	20 W / O	380x110x816
CSM - 22	22 W / O	380x110x866

CSM - 102	2 C / W	380x110x450
CSM - 104	4 C / W	380x110x480
CSM - 106	6 C / W	380x110x530
CSM - 108	8 C / W	380x110x580
CSM - 110	10 C / W	380x110x660
CSM - 112	12 C / W	380x110x700
CSM - 114	14 C / W	380x110x770
CSM - 116	16 C / W	380x110x830
CSM - 118	18 C / W	380x110x 880
CSM - 120	20 C / W	380x110x930
CSM - 122	22 C / W	380x110x980

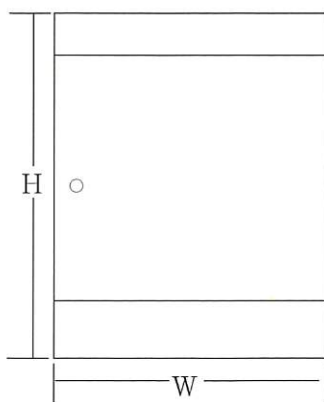



# 主要設備及生產綫

Main Production Facility and Production Line

 **L.H.**  
**LIK HUNG**



● 全自動電腦數控沖孔機  
Hydraulic CNC turret Punch Press Machine



● 電腦數控折邊機  
CNC Synchronize Hydraulic Press Brake



噴塗生產綫  
Powder coating line



組裝生產綫  
Production line



精密裁剪機  
Shearing machine







## 力雄五金制品有限公司 LIK HUNG METAL WORKS LTD.

總行：九龍長沙灣長順街5號地下

5, CHEUNG SHUN ST., G/F, CHEUNG SHA WAN, KLN.

TEL: 2743 7827, 2743 6362 FAX: 2785 7655

分行：九龍醫局西街1037號匯華工業大廈6樓C座

6/F, WUI WAH FACTORY BUILDING, WORKSHOP C,

1037, YEE KUK WEST ST., KLN.

TEL: 2785 2633, 2785 4783

## 東莞力雄五金電器塑膠製品有限公司 DONG GUAN LIK HUNG METAL ELECTRON & PLASTIC PRODUCTS CO., LTD.

地址：東莞市鳳崗鎮雁田圍興路

TEL: (0769)7771159

FAX: (0769)7772637

DONG GUAN LIK HUNG METAL ELECTRON & PLASTIC PRODUCTS CO., LTD.