


Revolutionary semi-circle hinge
allows easy optional lid removal
首創半圓形較位, 簡單設計, 更簡單拆蓋

Panel options and selec-
tions available
手抽旁片和蓋面可挑選款式



3-direction (left right front)
silicone-lip wire exits
3邊軟膠出線, 插電隨心所欲

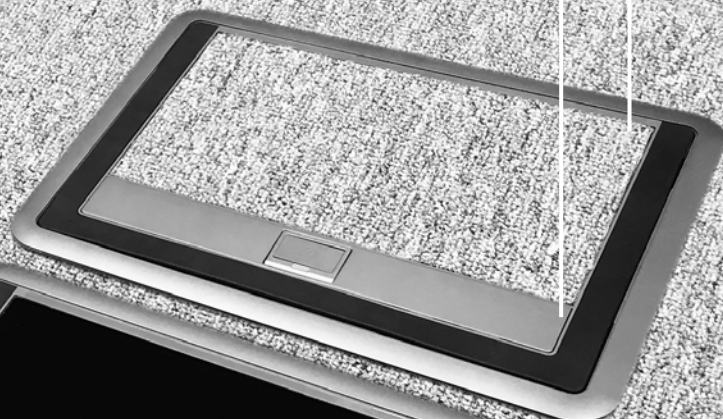

Our award-winning concept, available now 誠意推出獲獎革新概念

The Lik Hung floor service box
力雄LHFB插座箱

Winner of 2018
Asia Interna-
tional Innova-
tive Invention
Award - Gold
發明大獎 - 金獎

Design led
by multi-
award-winning
German indus-
trial designer.
德國設計師引領

Design /
features
patented.
獲數項專利


Lid loading rated
to withstand
over 4KN
(400kg)
負載 > 400kg

Side frame made
of glass-fibre
nylon for extra
strength.
框架選用玻璃纖維

IEC(EN) 60670-1
and 60670-23
Lab certified.
IEC 規格認可

Extensive job
refs. (eg. HKIA,
EMSD HQ)
多項實例 (香港機
場, 機電署總部)


Raised floor Service box (New Model 6 way) 地台插座箱 (新款 6位)

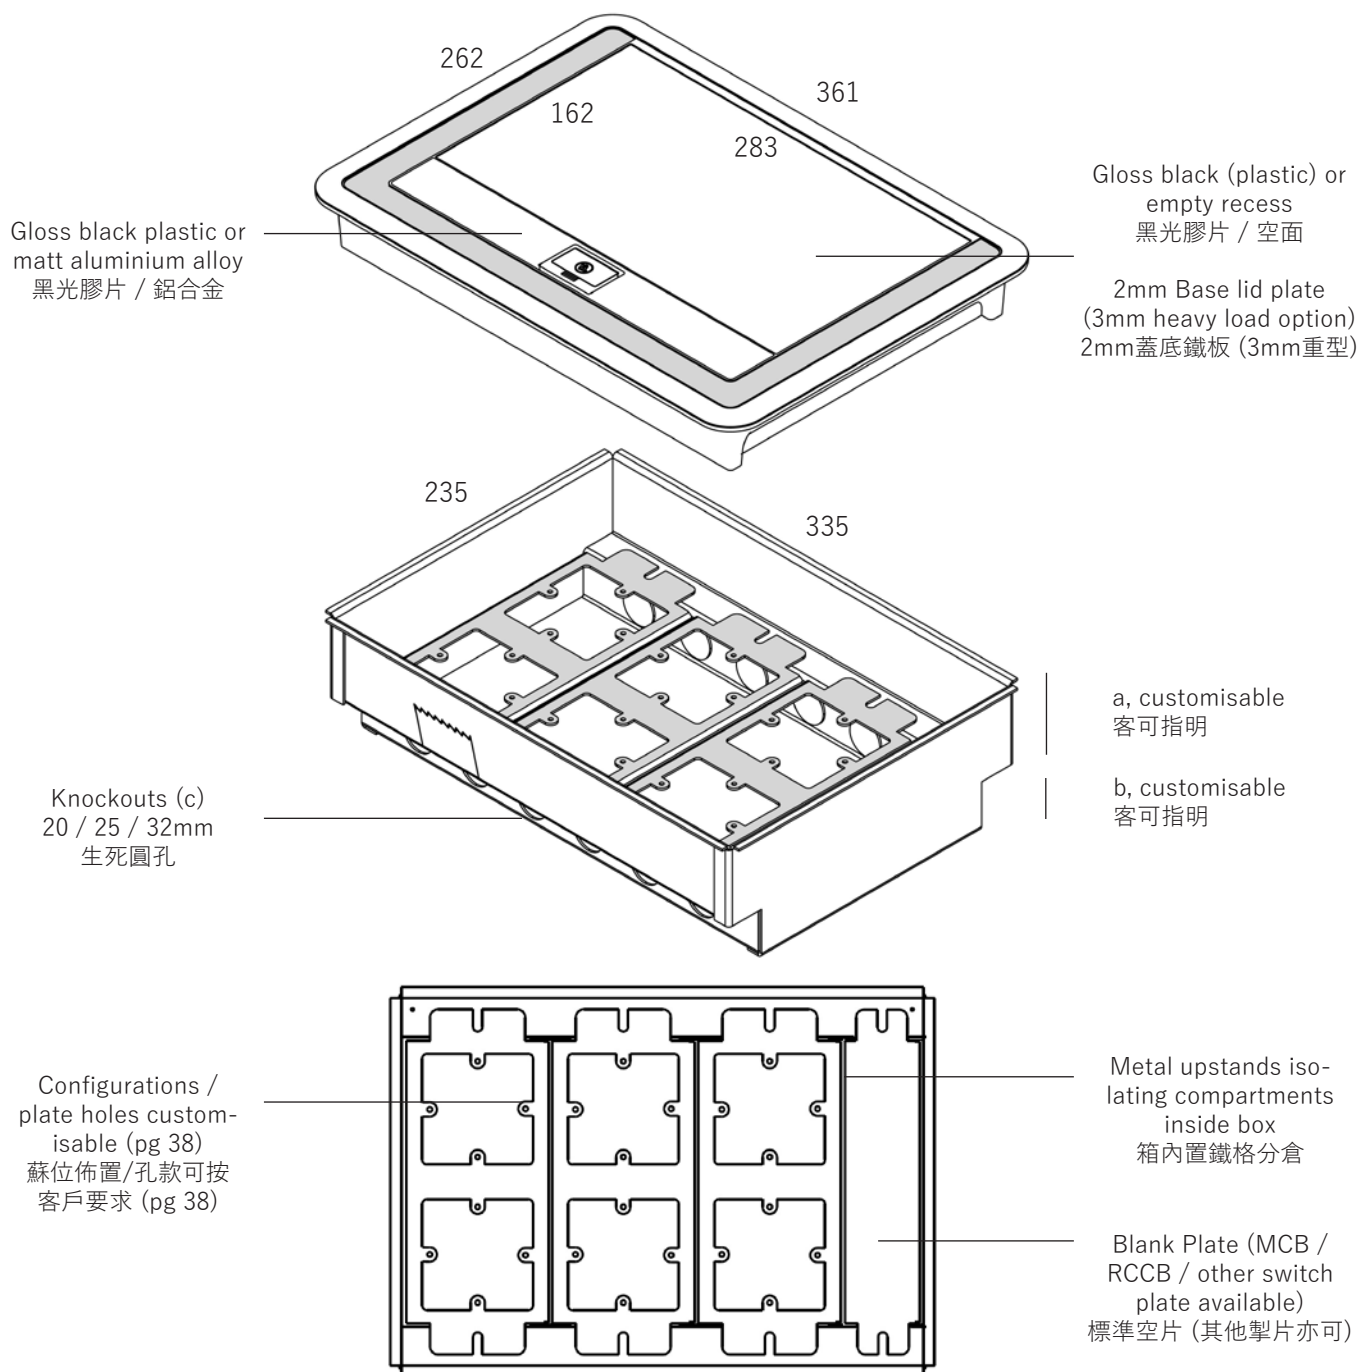

Model Number 型號	Socket number 可配蘇位	Standard model dimensions 標準款式尺寸 (mm)					Standard Socket Configuration 標準蘇位佈置		Main panel options 主面選擇	Handle Panel options 手抽旁片選擇
		a	b	knockout diameter c 生死孔 直徑 c	Lid plate thickness 蓋底鐵板厚		13a socket plate 蘇片	Blank plate 空片	Empty (standard) 空 (標準)	Aluminium alloy (standard) 鋁合金 (標準)
LHFB2525R	6	53	32	20	2		x3	x1	Black plastic 黑膠	Black plastic 黑膠

Bespoke mounting plates / socket numbers can be made / expanded 可要求特款座片或容納更多蘇位

Raised floor Service box (New Model 4,9 way) 地台插座箱 (新款 4,9位)

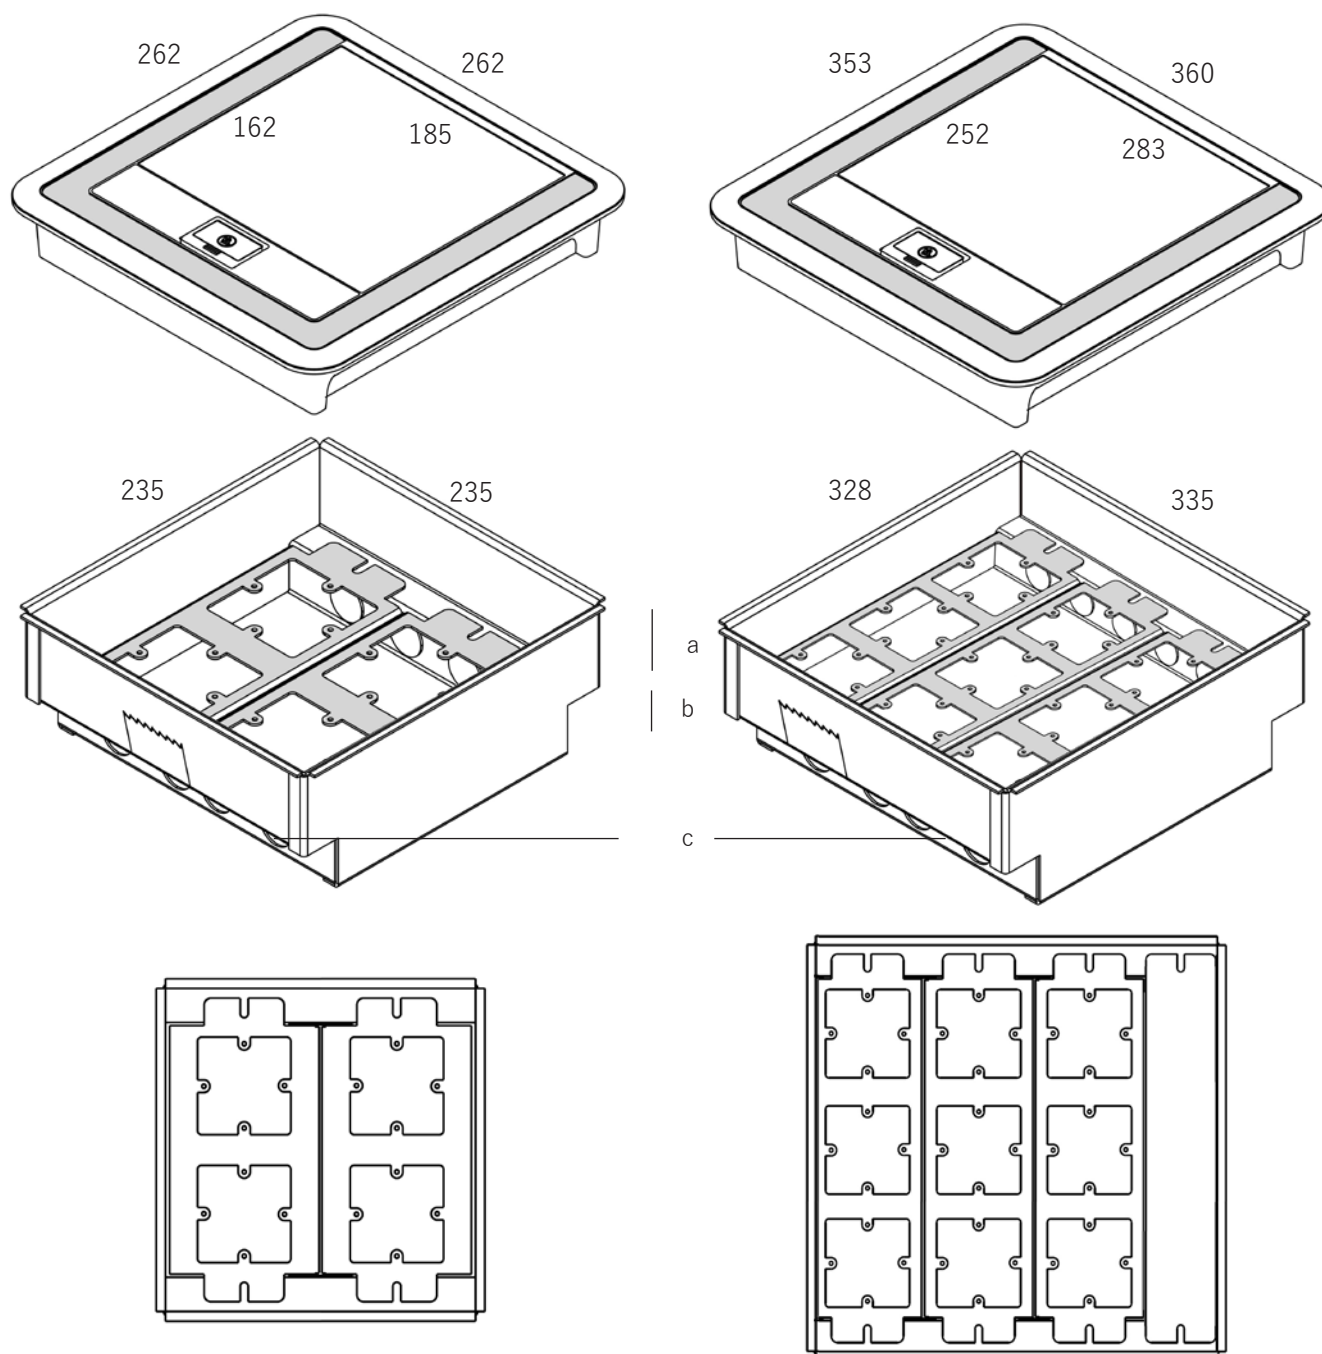


Model Number 型號	Socket number 可配蘇位	Standard model dimensions 標準款式尺寸 (mm)				Standard Socket Configuration 標準蘇位佈置		Main panel options 主面選擇	Handle Panel options 手抽旁片選擇
		a	b	knockout diameter c 生死孔 直徑c	Lid plate thickness 蓋底鐵板厚	13a socket plate 蘇片	Blank plate 空片	Empty (standard) 空 (標準)	Aluminium alloy (standard) 鋁合金 (標準)
LHFB2020R	4	53	32	20	2	x2	0		
LHFB3030R	9	53	32	20	2	x3	x1	Black plastic 黑膠	Black plastic 黑膠


Bespoke mounting plates / socket numbers can be made / expanded 可要求特款座片或容納更多蘇位

Socket mounting plates for LHFB 插座箱 - 插座底片

Available for 4, 6, 9 way LHFB boxes 可訂配用於 4, 6, 9位 LHFB 箱

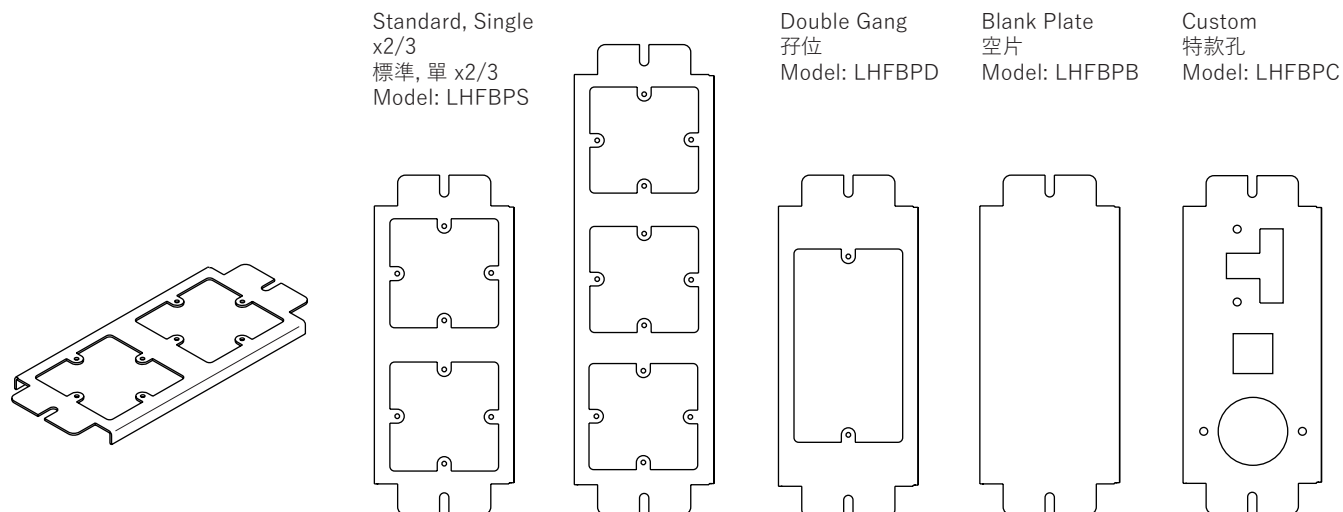

Raised floor Service box (Previous Model) 地台插座箱 (舊款)

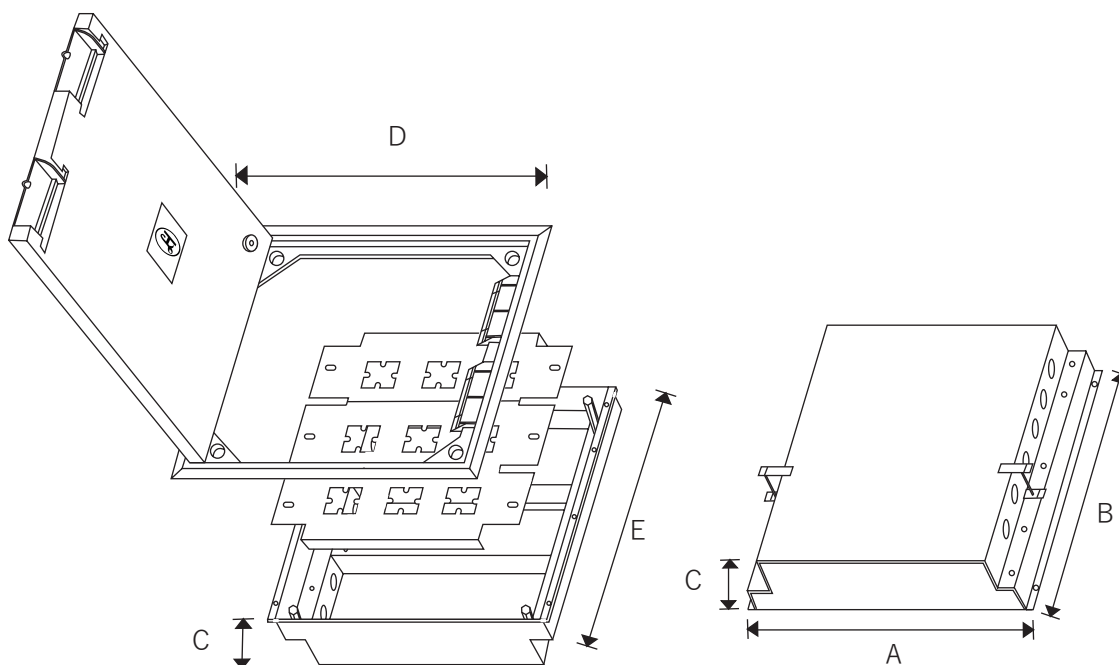

Socket number 蘇位	Dimension 尺寸 (mm)					Model number 型號
	A	B	C	D	E	
6	260	270	75	280	280	SBX2525R
9	330	330	75	355	355	SBX3025R

Underfloor Trunking 藏地線槽

STANDARDS

BS 4678 Part 2 Class 2 & 3 Corrosion Protection, BS1449, IEC 61084-1, 2-2, BSEN 10139, EN 10143, BSEN 10149, IPX4 according to IEC 60529

規格標準

BS 4678 Part 2 Class 2 & 3 抗蝕保護, BS1449, IEC 61084-1, 2-2, BSEN 10139, EN 10143, BSEN 10149, IPX4 (IEC 60529)

TRUNKING COVER TYPE

Completely sealed design, can be connected together to form a distribution network under the floor

槽蓋款式

全密封式設計, 地槽潛藏在地下互相接駁

MATERIAL

Galvanised Steel Sheet
Mild Steel
Stainless Steel Sheet SS304 (S), SS316 (X)

原料

鍍鋅鋼板
鋼板
不銹鋼板SS304 (S), SS316 (X)

LENGTH

Standard length of 2.44m,
Other lengths available on request

長度

標準2.44m,
其他長度可按照客需要

THICKNESS

Comply to HK government projects
Other thicknesses can be made
(0.9mm -2.0mm)

厚度

符合香港政府相關部門要求
其他厚度由0.9mm -2.0mm 可按要求生產

FINISHES

Hot Dip Galvanized to BS729, ISO1460, 1461 (H)
Coloured Epoxy Powder Coating / High Grade Outdoor Powder (P)

表面處理

熱浸鋅符合標準BS729, ISO1460, 1461 (H)
顏色聚脂油粉 / 高級戶外粉 (P)

SEPARATE COMPARTMENTS

2 compartment (D), or multi compartment (T)
as requested

槽內間格

可按照客人的要求製成二倉式(D), 多倉式(T)

Fittings and accessories meet the same standard and specifications as trunkings
線槽配件的規格及標準完全遵照及配合電線槽而製成


Underfloor Trunking and bends 藏地線槽及配件

Underfloor trunking 藏地線槽



A type (Sealed Lid 密封蓋)

B type (Removable Lid 活動蓋)

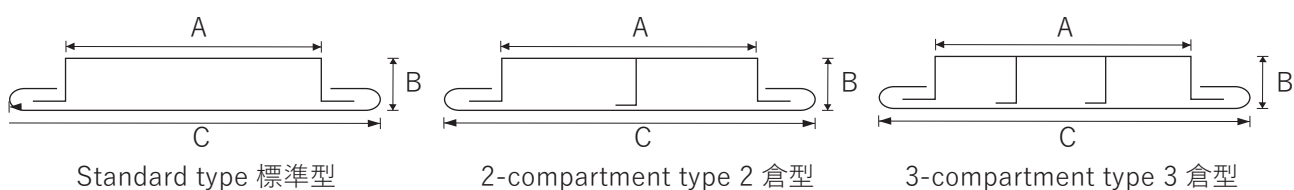


Standard type 標準型

2-compartment type 2 倉型


3-compartment type 3 倉型

Underfloor Trunking Size 藏地槽尺寸	Dimension 尺寸 (mm)			Model Number 型號		
	A	B	C	Standard Type 標準型	2-C Type 2倉型	3-C Type 3倉型
225 x 25	225	25	257	UF2525	UFD2525	UFT2525
225 x 32	225	32	257	UF2532	UFD2532	UFT2532
300 x 25	300	25	332	UF3025	UFD3025	UFT3025
300 x 32	300	32	332	UF3032	UFD3032	UFT3032

Bend 槽曲



Flat elbow 平面曲

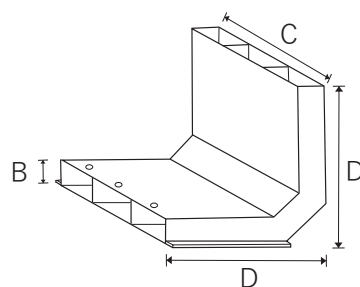

Vertical elbow 垂直曲

Underfloor Trunking Size 藏地槽尺寸	Dimension 尺寸 (mm)				Model Number 型號	
	A	B	C	D	Flat Elbow 平面曲	Vertical Elbow 垂直曲
225 x 25	300	25	225	300	UBH2525	UBV2525
225 x 32	300	32	225	300	UBH2532	UBV2532
300 x 25	375	25	300	375	UBH3025	UBV3025
300 x 32	375	32	300	375	UBH3032	UBV3032

Other sizes can be custom made
其他尺寸可按客戶要求生產

Underfloor Service box (New Model) 藏地插座箱 (新款)



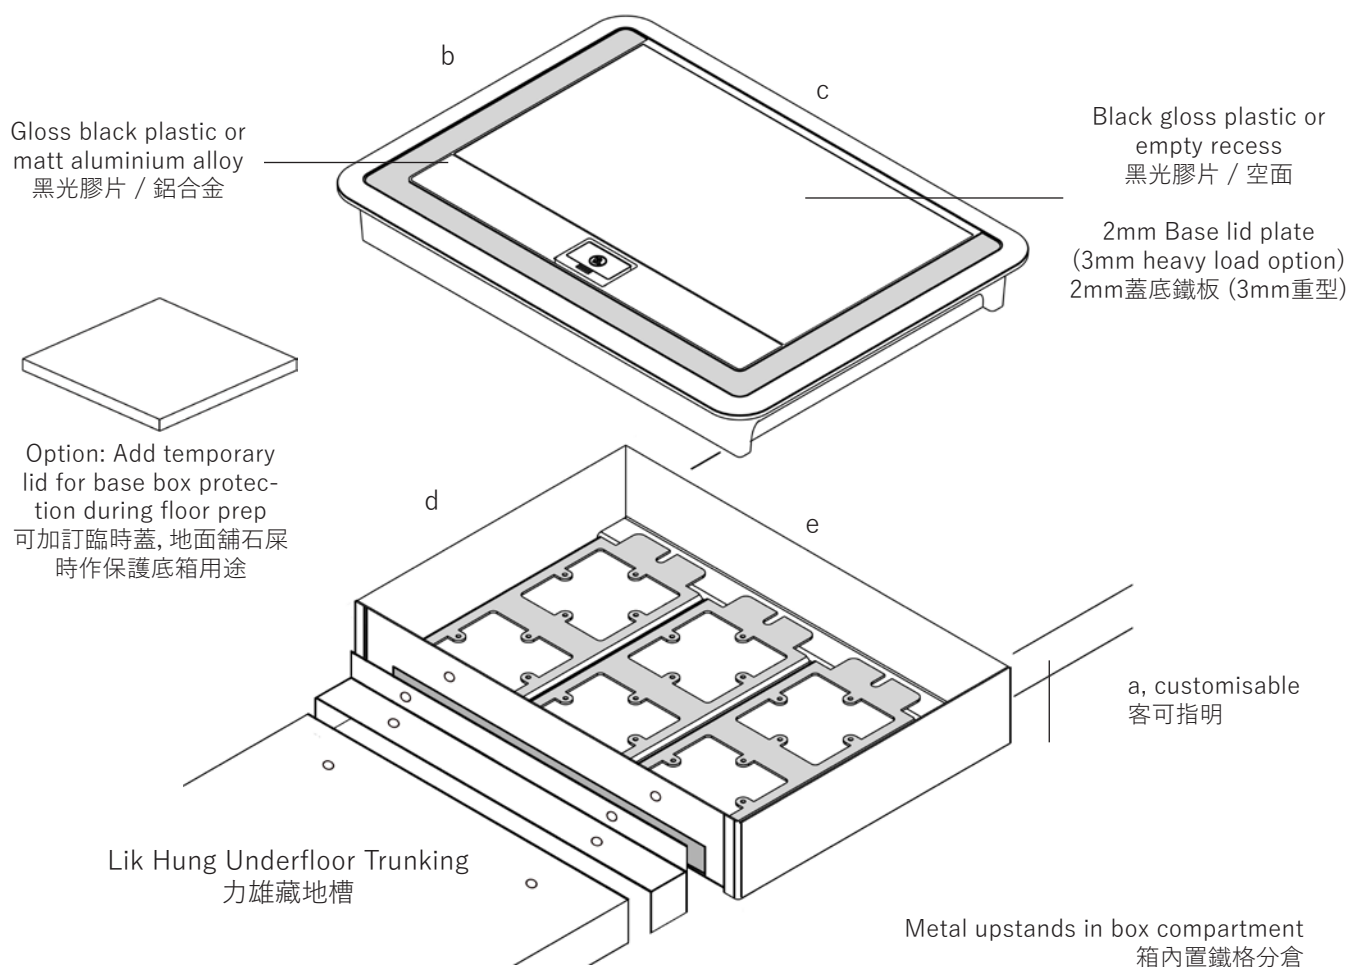



Plate holes customisable (pg 38)
蘇位佈置/孔款可按 客戶要求 (pg 38)



LHFB2020U



LHFB2525U


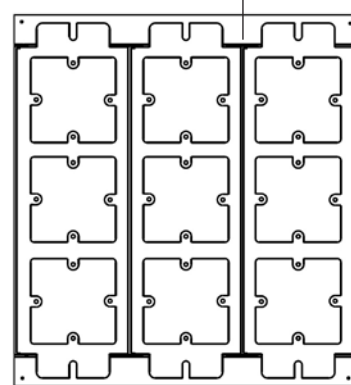


LHFB3030U


Metal upstands in box compartment
箱內置鐵格分倉

Model Number 型號	Socket number 可配蘇位	Standard model dimensions 標準款式尺寸 (mm)						13a socket plate # 蘇片 #	Use with number of trunking compartment 配槽格數量	Typically for underfloor trunkings of widths 通常配用槽闊 (mm)	Main panel options 主面選擇	Handle Panel options 手抽旁片選擇
		a	b	c	d	e	Lid plate thickness 蓋底鐵板厚					
LHFB2020U	4	>70	263	263	236	236	2	2	1/2/3	<230	Empty (standard) 空 (標準)	Aluminium alloy (standard) 鋁合金 (標準)
LHFB2525U	6	>70	263	360	236	337	2	3	1/2/3	<320		
LHFB3030U	9	>70	353	360	328	338	2	3	1/2/3	<320	Black plastic 黑膠	Black plastic 黑膠


Underfloor Junction box (New Model) 藏地槽箱 (新款)

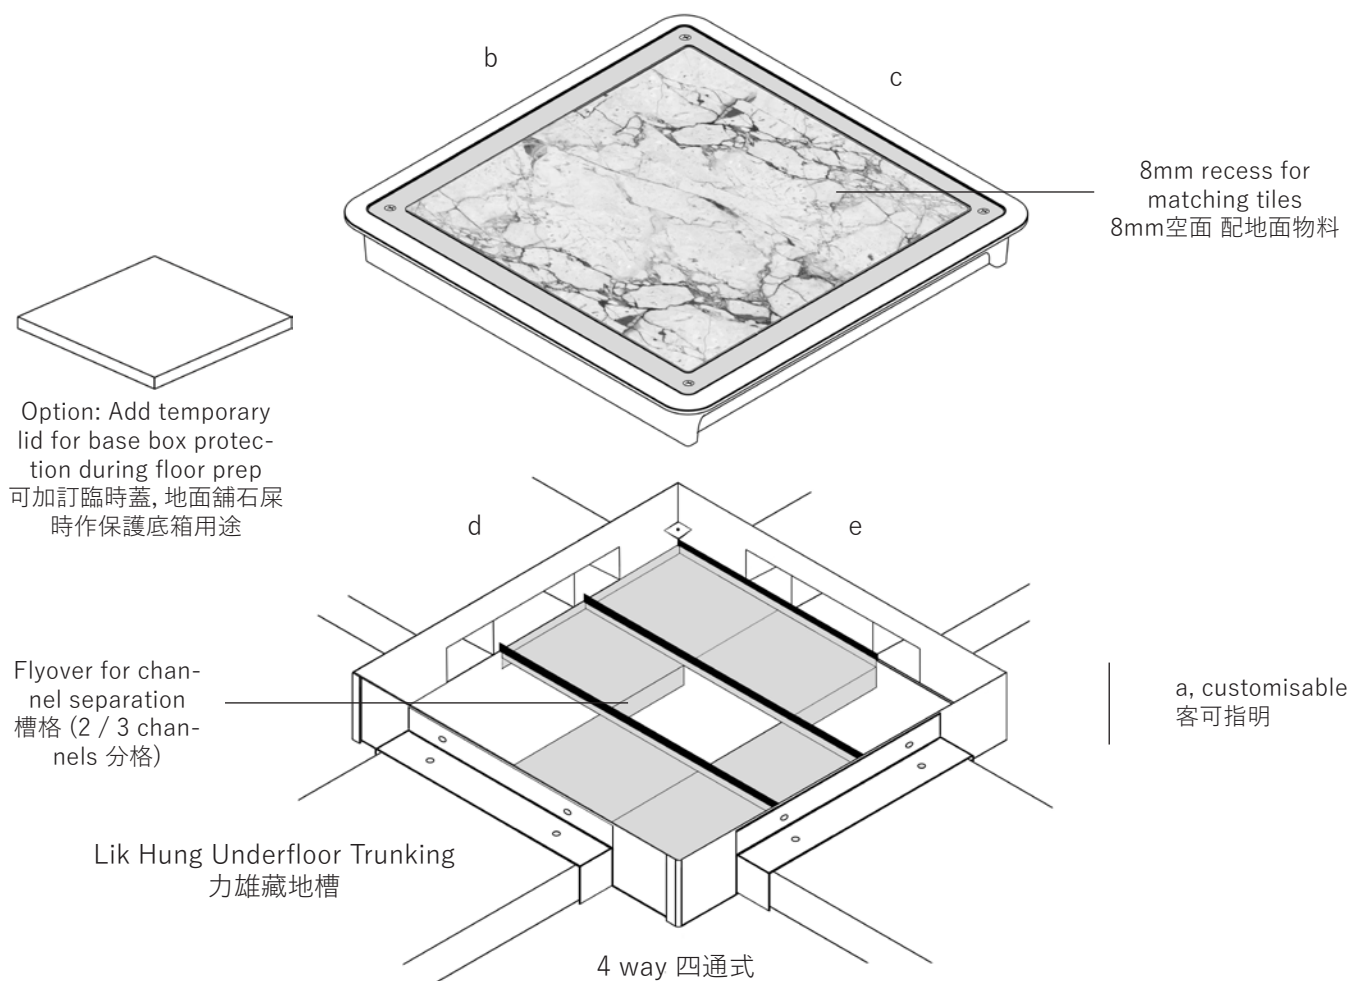


Terminal 終尾式



Through 直通式



Elbow 轉角式




Tee 三通式

Model Number 型號	Standard model dimensions 標準款式尺寸 (mm)					Use with number of trunking compartment 配槽格數量	Typically for underfloor trunkings of widths 通常配用槽闊 (mm)
	a	b	c	d	e		
LHJB2020U	>70	263	263	237	237	1 / 2 / 3	< 230
LHJB3030U	>70	354	361	328	337	1 / 2 / 3	< 320


Underfloor Service/Junction box (Previous Model) 藏地插座箱/槽箱 (舊款)

Underfloor Service box (Previous Model) 藏地插座箱 (舊款)

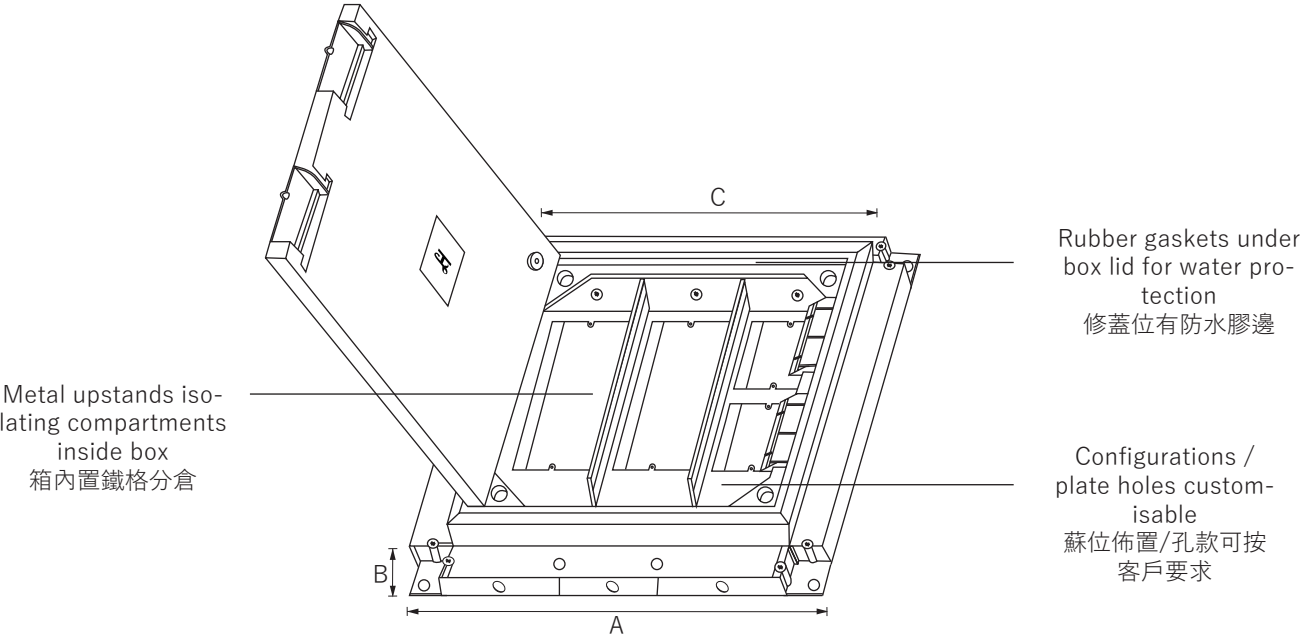

Underfloor Trunking Size 藏地槽尺寸	Socket number 可配蘇位	Dimension 尺寸 (mm)			Model Number 型號
		A	B	C	
225 x 25	6	320	72	280	SBX2525
225 x 32	6	320	79	280	SBX2532
300 x 25	9	395	72	355	SBX3025
300 x 32	9	395	79	355	SBX3032

Underfloor Junction box (Previous Model) 藏地槽箱 (舊款)

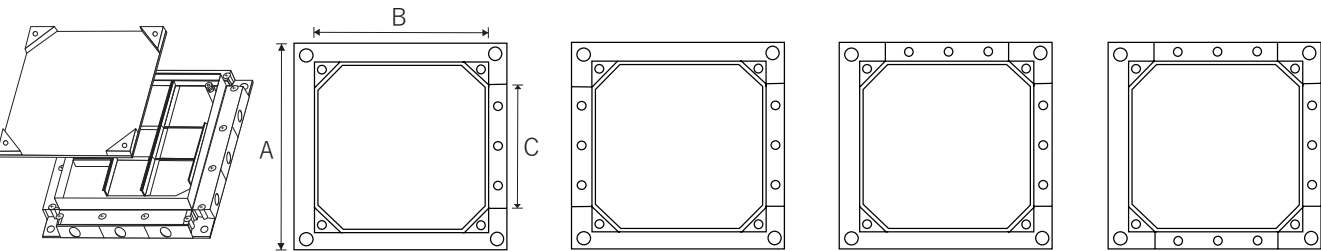

Underfloor Trunking Size 藏地槽尺寸	Dimension 尺寸 (mm)			Model Number 型號				
	A	B	C	4-way 4通式	Terminal 終尾式	Through 直通式	Elbow 轉角式	Tee 3通式
225 x 25	320	280	230	4JB2525	SJB2525	TJB2525	LJB2525	3JB2525
225 x 32	320	280	230	4JB2532	SJB2532	TJB2532	LJB2532	3JB2532
300 x 25	395	355	305	4JB3025	SJB3025	TJB3025	LJB3025	3JB3025
300 x 32	395	355	305	4JB3032	SJB3032	TJB3032	LJB3032	3JB3032